

COIL: @ +25°C

RESISTANCE 600 Ω ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.4 VDC

MUST RELEASE 1.5 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

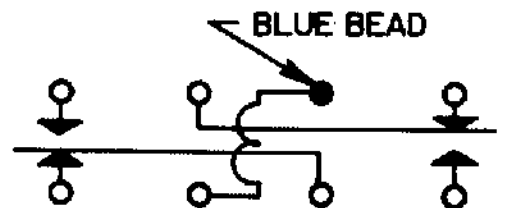

CONTACT RATING: 4 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 6-1-90 CK. 6-1-90 JMB

Communications Instruments, Inc.

CUST. Hi-G
 CUST. NO. ZHA-1B-126

TYPE HFW4A RELAY

HFW4A1196S01

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)