

REV. B
DCO 300825

TOLERANCES $\pm .010''$ - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C
 RESISTANCE _____ 400 OHMS $\pm 10\%$
 NOMINAL VOLTAGE _____ 28 VDC
 MUST OPERATE _____ 13.5 VDC MAX.
 _____ TRANSIENT SUPPRESSION - 42 VDC MAX.
 MUST RELEASE _____ 5.5 VDC MAX., 2.3 VDC MIN.


ENVIRONMENT:
 VIBRATION _____ 70 _____ Hz TO _____ 3000 _____ Hz @ _____ 30 _____ g's
 SHOCK _____ 200 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -70 _____ °C TO _____ +125 _____ °C

NOTES: OPERATE, RELEASE 6 MS MAX.
 CONTACT STABILIZATION 2.5 MS MAX.
 CONTACT BOUNCE 1 MS MAX.
 CONTACT BREAK BOUNCE 0.1 MS MAX.

CUST. _____ M83536/6-020M
 CUST. NO. _____ REV. _____

TE NUMBER
 8-1617760-0

CUSTOMER DATA SHEET

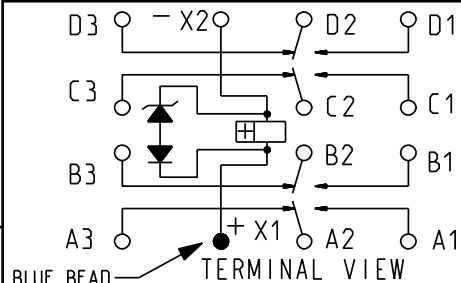

CONTACT RATING: _____ LOW LEVEL
 5 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE
 100,000 OPERATIONS

DR. B.D. 25APR2008 | CK. 5/9/08 J.M.B.

Tyco Electronics ©COPYRIGHT 2005
 TYCO ELECTRONICS CORPORATION
 ALL INTERNATIONAL RIGHTS RESERVED

CII PART NUMBER
 FCB-405-0620M

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)