


SPECIFICATION CONTROL DRAWING

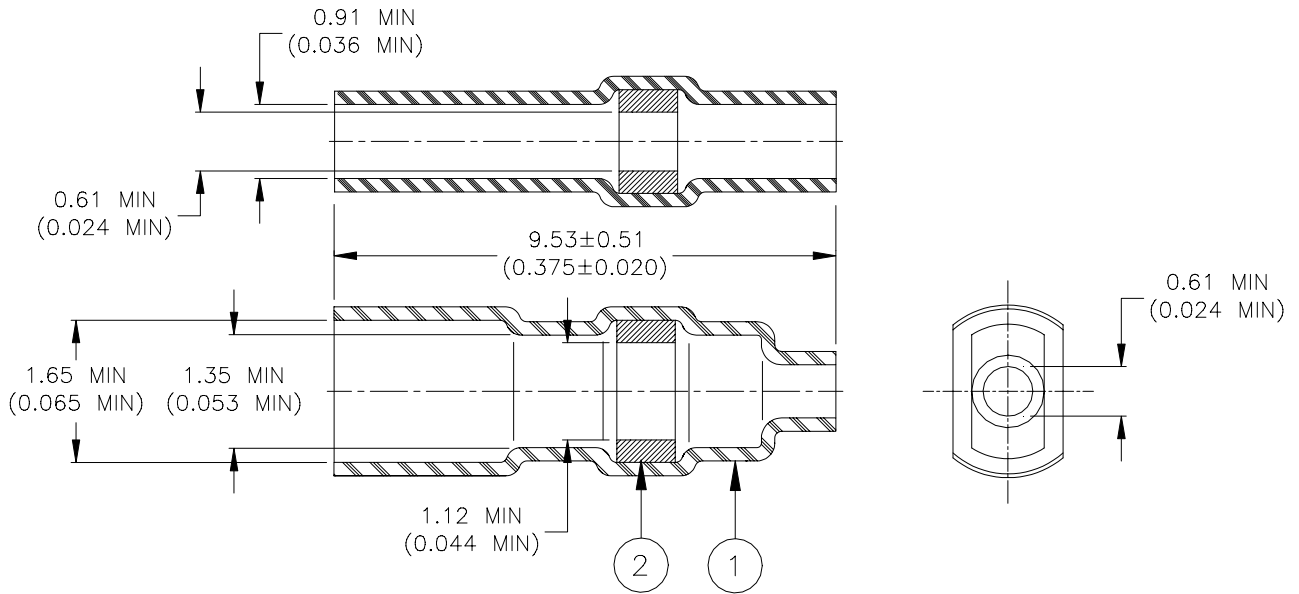

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
 SOLDER: TYPE Sn96 per ANSI-J-STD-006.
 FLUX: TYPE ROL1 per ANSI-J-STD-004.

APPLICATION

1. This part is designed to terminate a single 26, 28 or 30 AWG wire.
2. It is also designed for use on micro-miniature connectors having a maximum pin cross sectional area envelope of 0.61 (0.024) diameter.
3. The pin length shall be 4.06±0.25 (0.160±0.010) and wire strip length 3.81 (0.150).

<b style="font-size: 1.2em;">Tyco Electronics		Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE: SOLDERSLEEVE, MICRO-MINIATURE CONNECTOR, LEAD FREE		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			<i>Raychem</i>		DOCUMENT NO.: D-141-30-LF	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: A	DATE: 7-Mar-07	
DRAWN BY: P.TALLY	CAGE CODE : 06090	REPLACES : ---	DCR NUMBER: D070194	SCALE: NTS	SIZE: A	SHEET: 1 of 1

© 2007 Tyco Electronics Corporation. All rights reserved.
 If this document is printed it becomes uncontrolled. Check for the latest revision.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)