


# SPECIFICATION CONTROL DRAWING

82A6063

TITLE	THREE CONDUCTOR CABLE, DOUBLE SHIELDED, JACKETED, GENERAL PURPOSE, FLEXIBLE, 600 VOLT	Date	1-12-07	Revision	A
-------	--	------	---------	----------	---

This specification sheet forms a part of the latest issue of Raychem Specification 80.

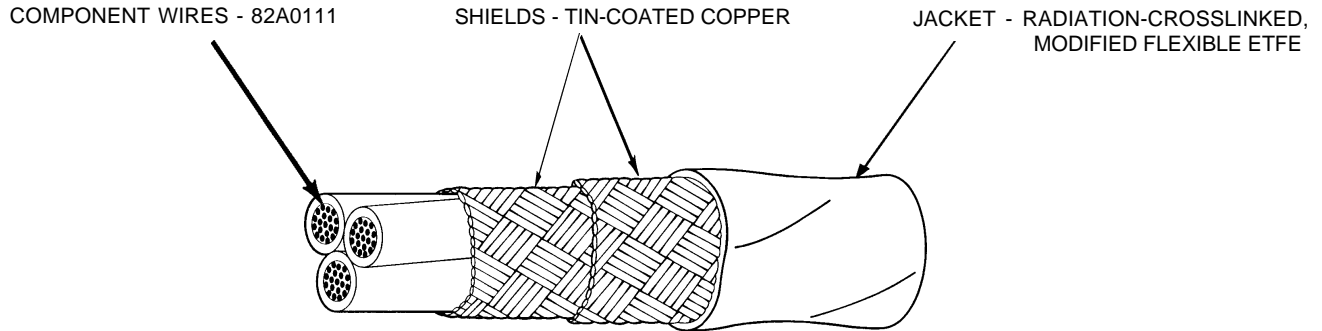

CABLE CONSTRUCTION DETAILS								
PART NUMBER 1/	CONDUCTOR SIZE (AWG)	INNER SHIELD SIZE (AWG)	OUTER SHIELD SIZE (AWG)	JACKET THICKNESS (inch)		OUTSIDE DIAMETER (inch)		MAXIMUM WEIGHT (lb/1000 ft)
				MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
82A6063-22-*	22	38	38	.007	.010	.147	.154	23.7

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS


TEMPERATURE RATING: 150°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms) at sea level  
 CROSSLINKING PROOF TEST: 300 ± 3°C for 7 hour,  
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz  
 JACKET COLOR: White preferred  
 JACKET ELONGATION AND TENSILE STRENGTH:  
 Elongation, 100% (minimum)  
 Tensile Strength, 3000 lbf/in<sup>2</sup> (minimum)  
 JACKET FLAWS:  
 Spark Test, 1500 volts (rms)  
 Impulse Dielectric Test, 6.0 kV (peak)  
 SECANT MODULUS (Test per ASTM D 882):  
 4.0 x 10<sup>4</sup> lbf/in<sup>2</sup> (maximum),  
 2% strain, 2 inch jaw separation, 0.2 inch/minute

SHIELD ANGLE: 26° minimum, 30° maximum (each)  
 SHIELD COVERAGE: 85% (minimum) (each)  
 VOLTAGE WITHSTAND (Post Environmental):  
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER  
 The "\*" in the part number above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color. Colors shown do not necessarily reflect the sequence of manufacturing.  
 1/ Example: AWG 20, black, brown and red component wires; white jacket:  
 82A6063-20-0/1/2-9

*Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.*

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

Page 1 of 2	DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.	 <b>Raychem</b> Wire & Cable 501 Oakside Avenue Redwood City, CA 94063-3800 Phone: 1-800-227-8816 Fax: 1-650-361-6297
	THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.	

**FOR EMBRAER INFORMATION ONLY**

Minimum Bend Radius (for non-flexing applications only): 5x the finished cable diameter

Note: If wrinkling occurs on inside of bend, cable should be replaced.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)