

# SPECIFICATION CONTROL DRAWING


**55PC6279**

TITLE THREE CONDUCTOR CABLE, DOUBLE SHIELDED, JACKETED, GENERAL PURPOSE, 600 VOLT

Date 11-1-06

Revision C

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

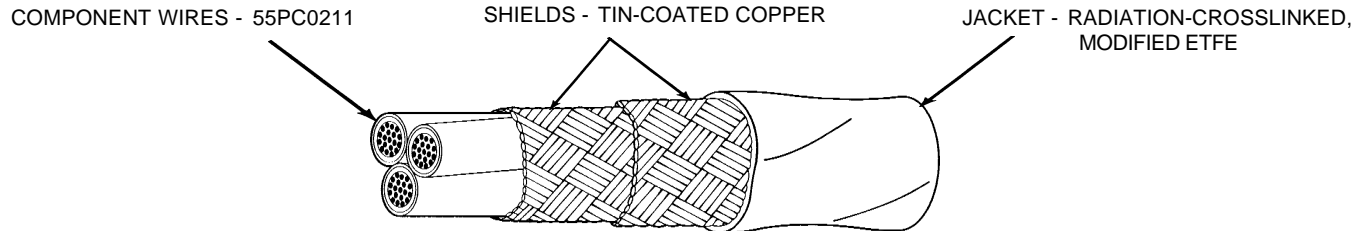

### CONSTRUCTION DETAILS

| PART NUMBER<br>1/ | CONDUCTOR SIZE (AWG) | INNER SHIELD SIZE (AWG) | OUTER SHIELD SIZE (AWG) | JACKET THICKNESS (in.) |             | DIAMETER (in.)   |              |                  | WEIGHT (lbs/1000 ft.) |              |                  |
|-------------------|----------------------|-------------------------|-------------------------|------------------------|-------------|------------------|--------------|------------------|-----------------------|--------------|------------------|
|                   |                      |                         |                         | LOWER SPEC LIMIT       | TARGET WALL | LOWER SPEC LIMIT | TARGET VALUE | UPPER SPEC LIMIT | LOWER SPEC LIMIT      | TARGET VALUE | UPPER SPEC LIMIT |
| 55PC6279-22-*     | 22                   | 38                      | 38                      | .0060                  | .0075       | .136             | .146         | .154             | 21.45                 | 23.64        | 27.17            |
| 55PC6279-20-*     | 20                   | 38                      | 38                      | .0060                  | .0080       | .158             | .167         | .174             | 28.10                 | 29.38        | 31.10            |
| 55PC6279-18-*     | 18                   | 38                      | 38                      | .0060                  | .0080       | .175             | .185         | .194             | 37.00                 | 38.37        | 40.10            |
| 55PC6279-16-*     | 16                   | 38                      | 38                      | .0060                  | .0080       | .189             | .201         | .210             | 44.18                 | 45.81        | 48.19            |
| 55PC6279-14-*     | 14                   | 38                      | 38                      | .0070                  | .0080       | .223             | .235         | .244             | 61.42                 | 63.33        | 66.25            |
| 55PC6279-12-*     | 12                   | 38                      | 38                      | .0070                  | .0085       | .261             | .275         | .286             | 86.73                 | 88.26        | 94.11            |
| 55PC6279-10-*     | 10                   | 36                      | 36                      | .0080                  | .0090       | .320             | .336         | .350             | 128.60                | 136.90       | 145.10           |
| 55PC6279- 8-*     | 8                    | 36                      | 34                      | .0080                  | .0090       | .467             | .488         | .506             | 228.75                | 243.08       | 256.66           |

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

**TEMPERATURE RATING: 150°C**

Maximum continuous conductor temperature  
**VOLTAGE RATING:** 600 volts (rms) at sea level  
**DIELECTRIC WITHSTAND:** 1500 volts (rms), 60 Hz  
**CROSSLINK VERIFICATION:** 300 ± 3°C for 1 hour  
**JACKET COLOR:** White preferred

**JACKET ELONGATION AND TENSILE STRENGTH:**

Elongation, 50% (minimum)  
 Tensile Strength, 5000 lbf/in<sup>2</sup> (minimum)

**JACKET FLAWS:**

Spark Test, 2500 volts (rms)  
 Impulse Dielectric Test, 6.0 kV (peak)

**SHIELD COVERAGE:** 85% (minimum) (each)

**VOLTAGE WITHSTAND TEST (Post Environmental):**  
 1000 volts (rms), 60 Hz, 1 minute

**PART NUMBER:**

The "\*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color. Colors shown do not necessarily reflect the sequence of manufacturing.

1/ Example: AWG 22, black, brown and red component wires; white jacket:  
 55PC6279-22-0/1/2-9

*Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.*

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

DIMENSIONS ARE IN INCHES AND, UNLESS OTHERWISE DESIGNATED, ARE NOMINAL

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.



**Raychem** Wire & Cable  
 501 Oakside Avenue  
 Redwood City, CA 94063-3800  
 Phone: 1-800-227-8816  
 Fax: 1-650-361-6297

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)