

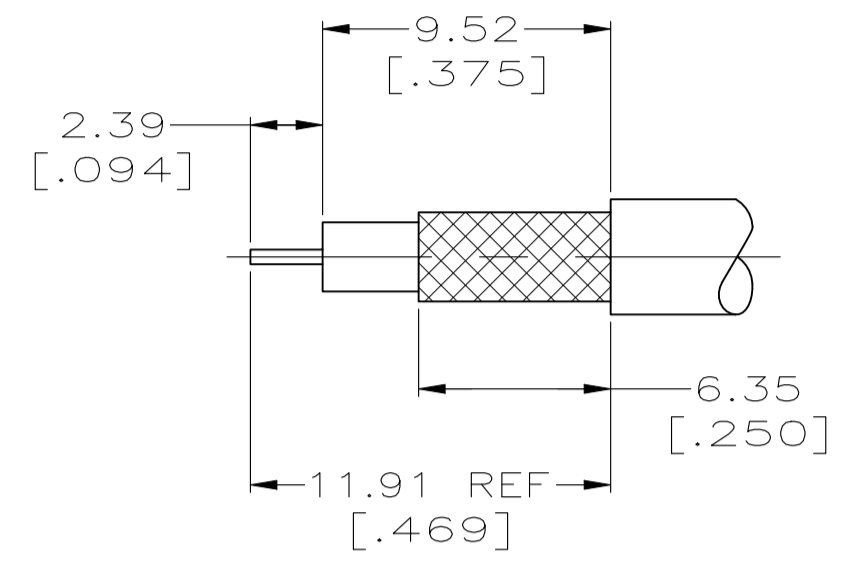


REVISIONS					
P	LTR	DESCRIPTION	DATE	DN	APVD
YS	REVISED	PER ECR-21-103739	20MAY2021	RZ	WK

- ① USE PRO-CRIMPER II: 354940-1
- 2. USE INSTRUCTION SHEET 9766
- ③ SPECIAL PACKAGING: BULK PACKAGE 25 PIECES
- ④ SPECIAL PACKAGING: BULK PACKAGE 100 PIECES

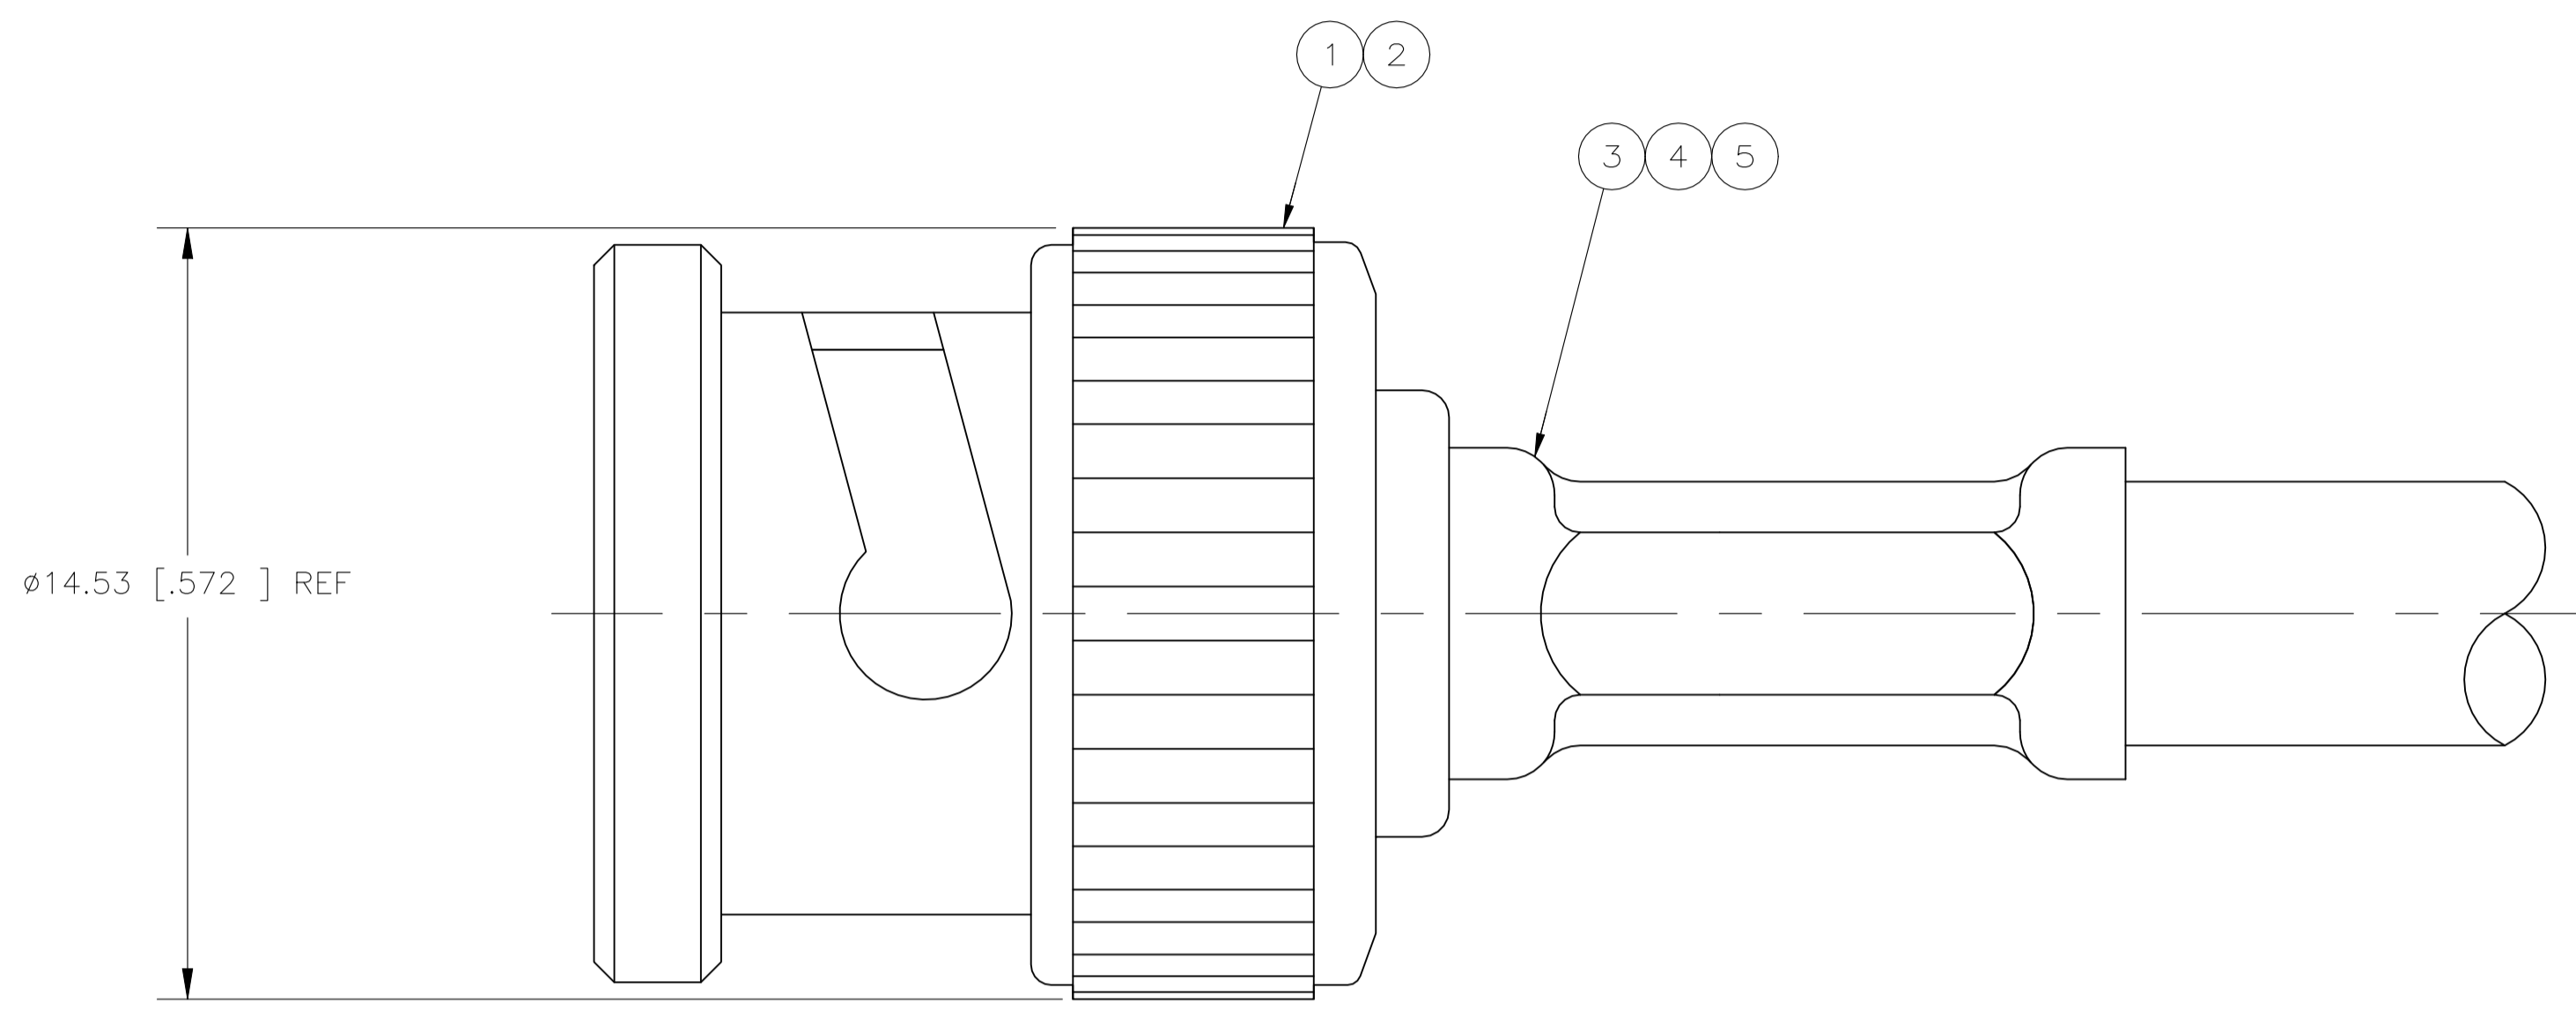

RECOMMENDED STRIP LENGTH
SCALE 4:1

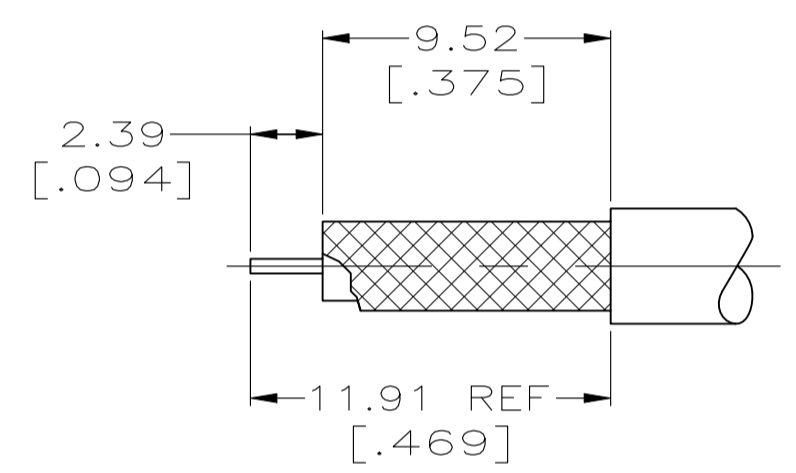

RECOMMENDED STRIP LENGTH
SCALE 4:1
(FOR 413589-5 AND 1-413589-2 ONLY)

	③	AT&T KS 19224 L2 CABLE AND JIS 1.5C-XV	1.07	[.042]	4.52	[.178]	852922-2	227194-2	222001-4	9-413658-2	413657-6	413653-2	9-413589-6
OBSOLETE	③	JIS 3C-2V	1.07	[.042]	5.41	[.213]	852922-1	-	-	9-221132-4	1-413657-0	413653-5	9-413589-5
OBSOLETE		RG-59 TYPE WITH .031 DIA CENTER CONTACT, BELDEN 9266, 9240 & 9259	1.07	[.042]	6.48	[.255]	852922-1	-	-	9-221132-1	413657-8	413653-1	9-413589-4
OBSOLETE		RG-179/U, 179A/U, 179B/U, 187/U & 187A/U	1.07	[.042]	4.52	[.178]	852922-2	227194-2	222001-4	9-413658-0	413657-6	413653-2	9-413589-3
OBSOLETE		AT&T 734A	1.07	[.042]	6.48	[.255]	852922-1	-	-	9-221132-3	413657-8	413653-4	9-413589-2
OBSOLETE		BELDEN 8218 AND JIS 2.5C-2V	1.07	[.042]	4.52	[.178]	852922-2	-	-	9-221132-6	413657-4	413653-2	9-413589-1
OBSOLETE		RG-59/U, 59A/U & 59B/U	1.07	[.042]	6.48	[.255]	852922-1	-	-	9-221132-1	413657-2	413653-1	9-413589-0
④	OBSOLETE	CUSTOM CABLE: C/C= $\phi 0.21$, DIELECTRIC= $\phi 1.22$, JACKET= $\phi 1.73$	1.07	[.042]	5.41	[.213]	852922-1	-	-	9-221132-0	1-413657-0	413653-5	2-413589-1
OBSOLETE		MONROSE 8466-3 AND 8299-3	1.07	[.042]	5.41	[.213]	852922-1	-	-	9-221132-0	1-413657-2	413653-5	1-413589-8
④	OBSOLETE	BELDEN 8218 AND JIS 2.5C-2V	1.07	[.042]	4.52	[.178]	852922-2	-	-	9-221132-6	413657-4	413653-2	1-413589-7
③	OBSOLETE	BELDEN 8218 AND JIS 2.5C-2V	1.07	[.042]	4.52	[.178]	852922-2	-	-	9-221132-6	413657-4	413653-2	1-413589-6
OBSOLETE	③	JIS 2.5C-2W	1.07	[.042]	5.41	[.213]	852922-1	-	-	9-221132-0	413657-4	413653-2	1-413589-5
OBSOLETE	③	JIS 3C-2W	1.07	[.042]	6.48	[.255]	852922-1	-	-	9-221132-9	1-413657-0	413653-6	1-413589-4
OBSOLETE	③	AT&T KS 19224 L2 CABLE AND JIS 1.5C-XV	1.07	[.042]	4.52	[.178]	852922-2	227194-2	222001-4	9-413658-2	413657-6	413653-2	1-413589-3
OBSOLETE	③	BELDEN 8281, 9231 & AT&T 728 AND JIS 5C-2V	1.07	[.042]	8.23	[.324]	852922-3	-	-	9-221132-2	413657-8	413653-3	1-413589-2
③	OBSOLETE	JIS 3C-2V	1.07	[.042]	5.41	[.213]	852922-1	-	-	9-221132-4	1-413657-0	413653-5	1-413589-1
		AT&T 735A C/C= $\phi 0.16$, DIELECTRIC= $\phi 0.77$, JACKET= $\phi 1.30$	1.07	[.042]	4.52	[.178]	852922-2	-	-	9-413658-2	413657-4	413653-2	1-413589-0
		RG-59 TYPE WITH .031 DIA CENTER CONTACT, BELDEN 9266, 9240 & 9259	1.07	[.042]	6.48	[.255]	852922-1	-	-	9-221132-1	413657-8	413653-1	413589-9
SUPERSEDED BY 5413589-8		RG-179/U, 179A/U, 179B/U, 187/U & 187A/U	1.07	[.042]	4.52	[.178]	852922-2	227194-2	222001-4	9-413658-0	413657-6	413653-2	413589-8
		AT&T 734A	1.07	[.042]	6.48	[.255]	852922-1	-	-	9-221132-3	413657-8	413653-4	413589-7
		TIMES RG-59/U, DOUBLE BRAID, .270 OD JACKET	1.07	[.042]	8.23	[.324]	852922-3	-	-	9-221132-2	413657-2	413653-1	413589-6
		BELDEN 8281, 9231 & AT&T 728 AND JIS 5C-2V	1.07	[.042]	8.23	[.324]	852922-3	-	-	9-221132-2	413657-8	413653-3	413589-5
OBSOLETE		AT&T KS 19224 L2 CABLE AND JIS 1.5C-XV	1.07	[.042]	4.52	[.178]	852922-2	227194-2	222001-4	9-413658-2	413657-6	413653-2	413589-4
		BELDEN 8218 AND JIS 2.5C-2V	1.07	[.042]	4.52	[.178]	852922-2	-	-	9-221132-6	413657-4	413653-2	413589-3
		RG-59/U, 59A/U & 59B/U	1.07	[.042]	6.48	[.255]	852922-1	-	-	9-221132-1	413657-2	413653-1	413589-2
OBSOLETE		BELDEN 88241	1.07	[.042]	6.48	[.255]	852922-1	-	-	9-413658-3	413657-2	413653-1	413589-1

FOR USE WITH CABLE	CONTACT CRIMP (SQUARE)	FERRULE CRIMP (HEX)	DIE SET ①	⑤ TUBING, PLASTIC QTY=1	④ TUBING QTY=1	③ FERRULE QTY=1	② CONTACT QTY=1	① PLUG ASSY QTY=1	PART NUMBER
--------------------	------------------------	---------------------	-----------	-------------------------	----------------	-----------------	-----------------	-------------------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0. PLC	± .01
1. PLC	± .01
2. PLC	± .01
3. PLC	± .01
4. PLC	± .01
ANGLES	± .01

MATERIAL: - FINISH: -

APPROVED: R. E. RUTH 4/30/90

TE Connectivity

PLUG, 75 OHM, HEX CRIMP, BNC

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 413589

WEIGHT: 0.000000

CUSTOMER DRAWING

SCALE: 8:1 SHEET: 1 OF 1 REV: Y5

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)