


# CUSTOMER DRAWING

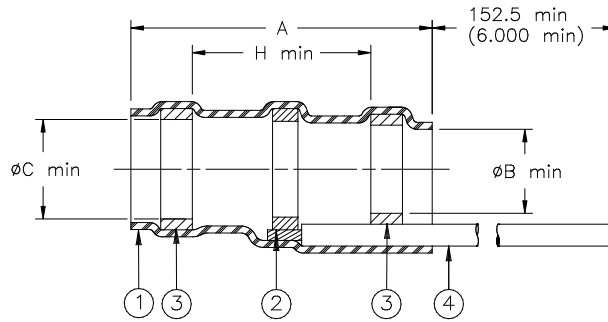

Product Name				Product Dimensions				Cable Dimensions				
20 AWG	22 AWG	24 AWG	26 AWG	A±1.75 (A±0.07)	Ø B min	Ø C min	H min	Ø E max	Ø F min	Ø G min	Ø D max	J±0.5 (J±0.02)
S02-01-R	S02-06-R	S02-11-R	S02-16-R	16.5 (0.650)	1.90 (0.075)	2.65 (0.105)	8.25 (0.325)	2.65 (0.105)	0.90 (0.035)	0.50 (0.020)	1.90 (0.075)	7.5 (0.295)
S02-02-R	S02-07-R	S02-12-R	S02-17-R	16.5 (0.650)	2.65 (0.105)	3.68 (0.145)	8.25 (0.325)	3.68 (0.145)	1.40 (0.055)	0.75 (0.030)	2.65 (0.105)	7.5 (0.295)
S02-03-R	S02-08-R	S02-13-R	S02-18-R	16.5 (0.650)	4.30 (0.170)	5.08 (0.200)	8.25 (0.325)	5.08 (0.200)	2.15 (0.085)	1.25 (0.050)	4.30 (0.170)	7.5 (0.295)
S02-04-R	S02-09-R	S02-14-R	S02-19-R	19.1 (0.750)	5.95 (0.235)	6.45 (0.255)	8.25 (0.325)	6.45 (0.255)	3.30 (0.130)	1.80 (0.070)	5.95 (0.235)	7.5 (0.295)
S02-05-R	S02-10-R	S02-15-R	S02-20-R	19.1 (0.750)	7.00 (0.275)	7.60 (0.300)	8.25 (0.325)	7.60 (0.300)	4.30 (0.170)	2.50 (0.100)	7.00 (0.275)	7.5 (0.295)


## MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX AND THERMAL INDICATOR:
  - SOLDER: TYPE Sn63 per ANSI-J-STD-006.
  - FLUX: TYPE ROL1 per ANSI-J-STD-004.
  - THERMAL INDICATOR: Color change: violet to colorless.
- MELTABLE RING: Environment resistant thermoplastic. Color: blue.
- GROUND LEAD: MIL-W-22759/32-AA-90 lead gauge per table.

## APPLICATION

- These parts are designed to provide an environment resistant shield termination on cables meeting the following criteria:
  - Dimensions: Per table. Jacket rating: 125°C.
  - Shield plating: Tin or silver. Jacket material: See M83519/2 or consult TE Connectivity.
- Parts are qualified to M83519/2.
- For assembly information, refer to Raychem document RCPS-100-70.

For best results, prepare the cable as shown:

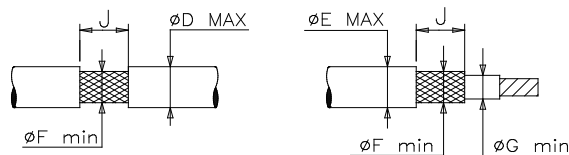

		<b>Raychem DEVICES</b>	TITLE: <b>SOLDERSLEEVE* SHIELD TERMINATOR, IMMERSION RESISTANT, MIL-S-83519/2</b>	
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			DOCUMENT NO.: <b>S02-XX-R</b>	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV :  5	DATE :  30-Mar-2020
PREPARED BY: <b>M. FORONDA</b>	CAGE CODE: 06090		ECO: ECO-20-004510	SCALE: NTS
			SHEET: 1 of 1	

© 2020 TE Connectivity Ltd. Family of Companies. All Rights Reserved.

If this document is printed it becomes uncontrolled. Check

\*TE Connectivity, TE connectivity (logo), Raychem, Downloaded From [Oneyac.com](http://Oneyac.com)

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)