THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - ,- .
© 2016 Commscope, INC. Confidential NOTICE: These drawings and specifications are the proprietary property of COMMSCOPE, INC. and may be used only for the specific purpose authorized in writing by COMMSCOPE, INC.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REV; 40033535MCO	28SEP2016	GG	TE

1. MAXIMUM CONNECTOR INSERTION LOSS IS 0.5 dB PLUS CABLE ATTENUATION OF 1.5dB/km AT 1300nm (SEE TABLE)
2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

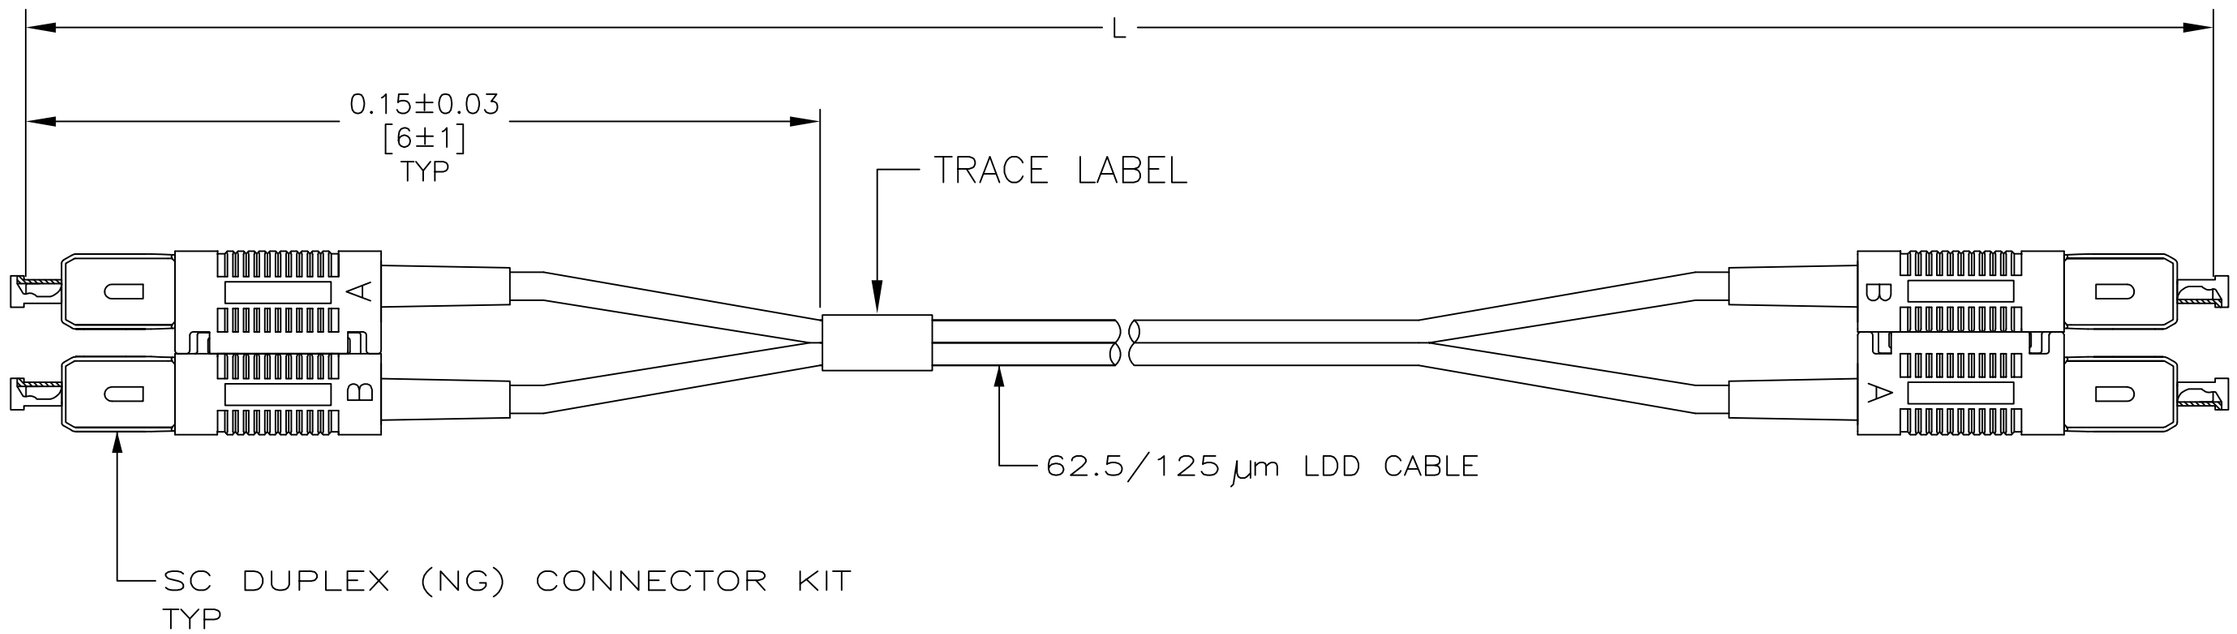

MAX IL (dB) 1	L	PART NUMBER
0.95	300.00±3.00 [11811.02±118.11]	9-5492249-9
0.65	100.00±1.00 [3937.01±39.37]	9-5492249-8
0.55	35.00±0.35 [1377.95±14.00]	3-5492249-5
0.55	30.00±0.30 [1181.10±11.81]	3-5492249-0
0.54	25.00±0.30 [984.25±11.81]	2-5492249-5
0.53	20.00±0.30 [787.40±11.81]	2-5492249-0
0.52	15.00±0.15 [590.60±6.00]	1-5492249-5
0.52	10.00±0.15 [393.70±5.91]	1-5492249-0
0.51	8.00±0.15 [315.00±6.00]	5492249-8
0.51	6.00±0.08 [236.20±3.00]	5492249-6
0.51	5.00±0.08 [196.85±3.15]	5492249-5
0.50	3.00±0.05 [118.11±1.97]	5492249-3
0.50	2.00±0.05 [78.74±1.97]	5492249-2
0.50	1.00±0.05 [39.37±1.97]	5492249-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: METERS [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -
FINISH -

DWN C.S. VASU 25 OCT 05
CHK J. DUNCAN 25 OCT 05
APVD J. DUNCAN 25 OCT 05
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

COMMSCOPE, INC.

NAME CABLE ASSEMBLY, 62.5/125 LDD, AMP SC DUPLEX (NG), OPTIMATE —

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-5492249	—

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV B

5492249

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>TE Connectivity(泰科)

Downloaded From Oneyac.com