

NOTES:

1. MATERIAL:

- A) BACKSHELL COPPER ALLOY 172 PER QQ-A-533
- B) BACKSHELL SCREW STAINLESS STEEL PER QQ-S-763, 300 SERIES
- C) CLAMP BAR STAINLESS STEEL PER QQ-S-763, 300 SERIES
- D) INSERT ALUMINUM ALLOY PER QQ-A-356
- E) CLAMP SCREW STAINLESS STEEL PER QQ-S-763, 300 SERIES
- F) BRAID COPPER ALLOY

2. FINISH:

- A) BACKSHELL CADMIUM PLATED PER QQ-P-416
- B) BACKSHELL SCREW CADMIUM PLATED PER QQ-P-416
- C) CLAMP BAR CADMIUM PLATED PER QQ-P-416
- D) INSERT TIN PLATED PER MIL-T-10727
- E) CLAMP SCREW CADMIUM PLATED PER QQ-P-416
- F) BRAID TIN PLATED

3. RAYCHEM PART NUMBER CHA-0189 -1 AND DATE CODE ARE STAMPED APPROXIMATELY AS SHOWN.

4. WHEN A BUS IS REQUIRED FOR TERMINATING SHIELDS, REFER TO RAYCHEM SPECIFICATION CONTROL DRAWING CTA-0158 FOR BUS DETAILS.


| REVISIONS | | | |
|-----------|-------------------------------------|-----------|----------|
| NO. | DESCRIPTION | DATE | APPROVED |
| 1 | N/C INITIAL RELEASE PER DCR# T28038 | 9/19/2000 | M.HIGGY |

0.285 MAX.
[7.24]

12.0 APPROX.
[304.8]

1.98 [50.3]
REF.

2.52
[64.0]
REF.

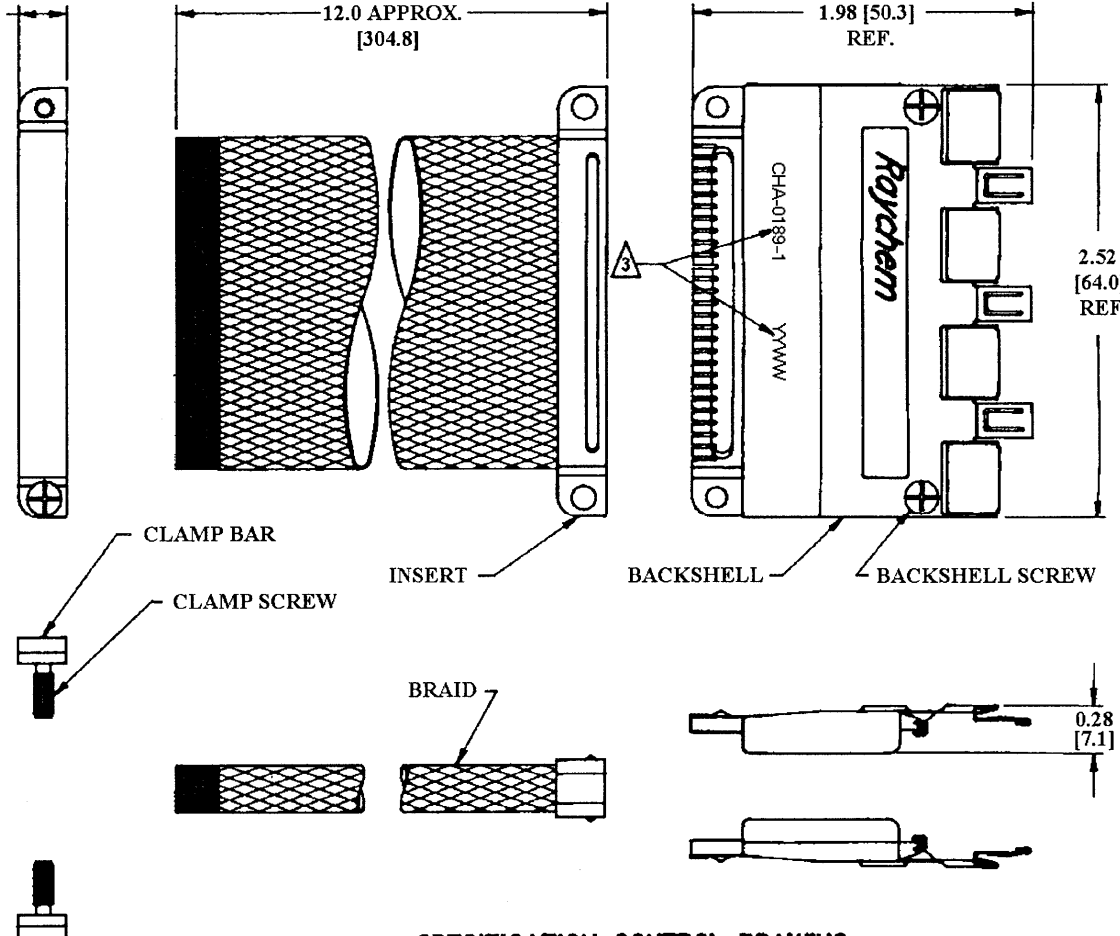

SPECIFICATION CONTROL DRAWING

| | | | |
|--|-------------------------|--|--|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS. DECIMALS .XXX ± .005 1.13 mm .XX ± .02 1.5 mm ANGLES .X ± | DRAWN ZS.ORBAN 9/8/2000 | Raychem RAYCHEM CORPORATION 500 OCEANVIEW DRIVE SHERO PARK, CALIFORNIA 94628 | |
| | CHECKED | | TITLE BACKSHELL, PLUG, 2", EME, CADMIUM PLATED (FOR ROUND WIRE PLANAR-ARRAYED CABLES) MTC SERIES SPECIAL |
| | APPROVED | | DATE 9/19/2000 |
| | APPROVED M.HIGGY | | Dwg. NO. CHA-0189-1 |
| WEIGHT 63.4 GRAMS MAX. | CAD NAME T28038.TIF | REV N/C | |
| THIRD ANGLE PROJECTION | | DO NOT SCALE THIS DRAWING | |

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

PART NO. CHA-0189-1

A

4

3

2

1

1

SHEET 1 OF 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)