
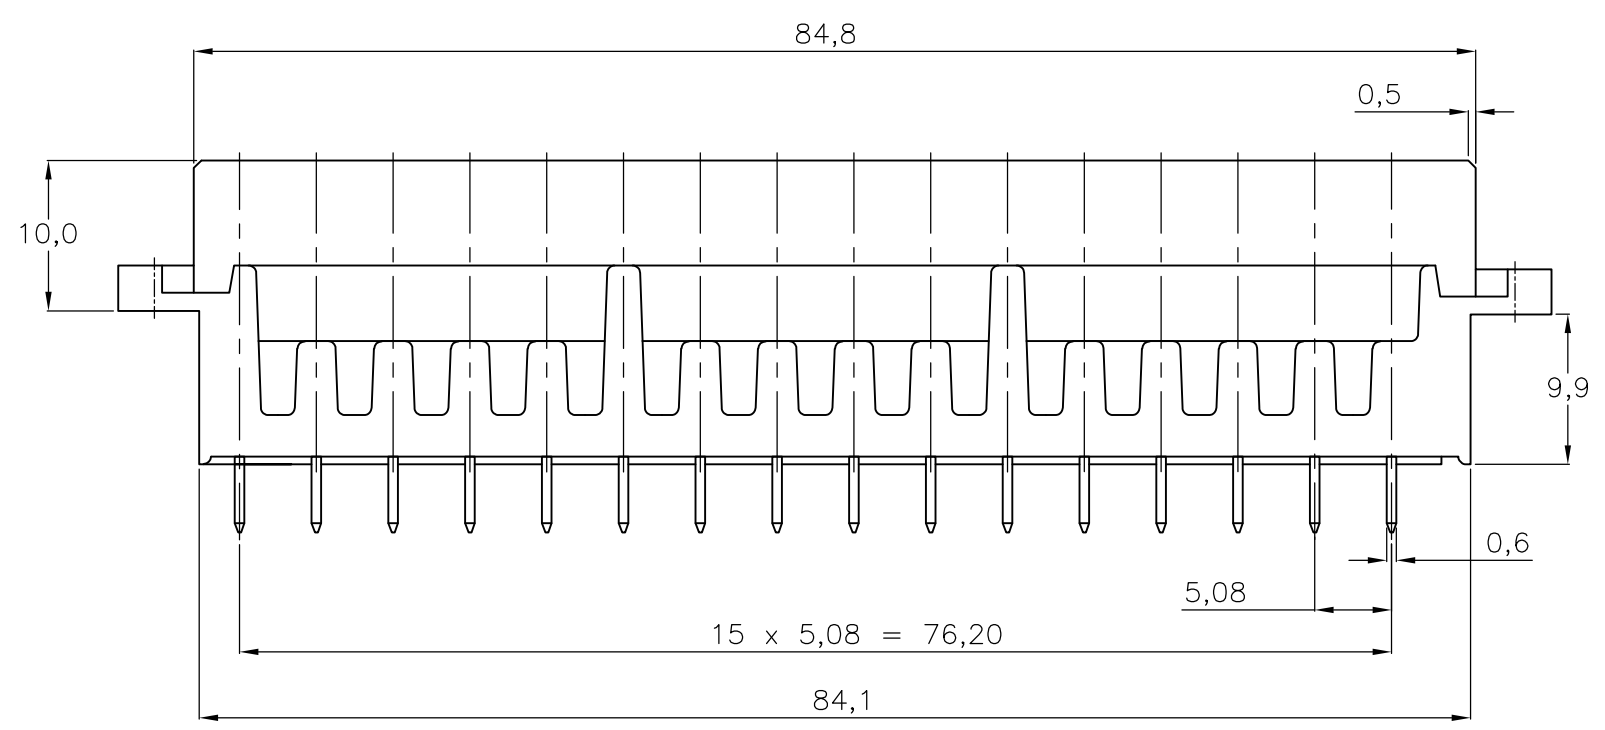
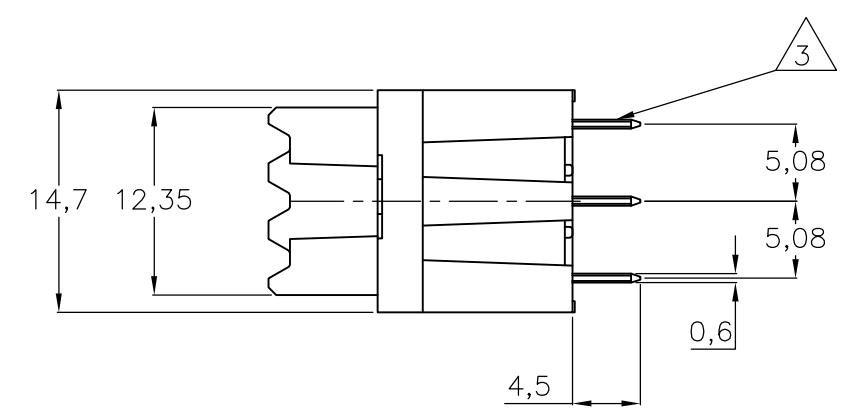


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-		G	REVISED PER ECO-15-005333	07JUL2015	AP	RP

NOTES:

- 1 MATERIAL : - HOUSING : POLYESTER G.F.
COLOUR : GREY.
- CONTACTS : PHOSPHORBRONZE.
- 2 FINISH : -1 AT CONTACT AREA EIC 60603-2 PERFORMANCE LEVEL I OVER NICKEL.
AT POST AREA 2.5µm Sn OVER 1.25µm Ni.
-4 AT CONTACT AREA EIC 60603-2 PERFORMANCE LEVEL II OVER NICKEL.
AT POST AREA 2.5µm Sn OVER 1.25µm Ni.
-7 SAME AS -1 ONLY 2,0µm AU.
-8 AT CONTACT AREA EIC 60603-2 PERFORMANCE LEVEL III OVER NICKEL.
AT POST AREA 2.5µm Sn OVER 1.25µm Ni.
- 3 SOLDERPOSTS SUITABLE FOR 0,80±0,05 OR 1,0±0,1 NOM DIA HOLES.

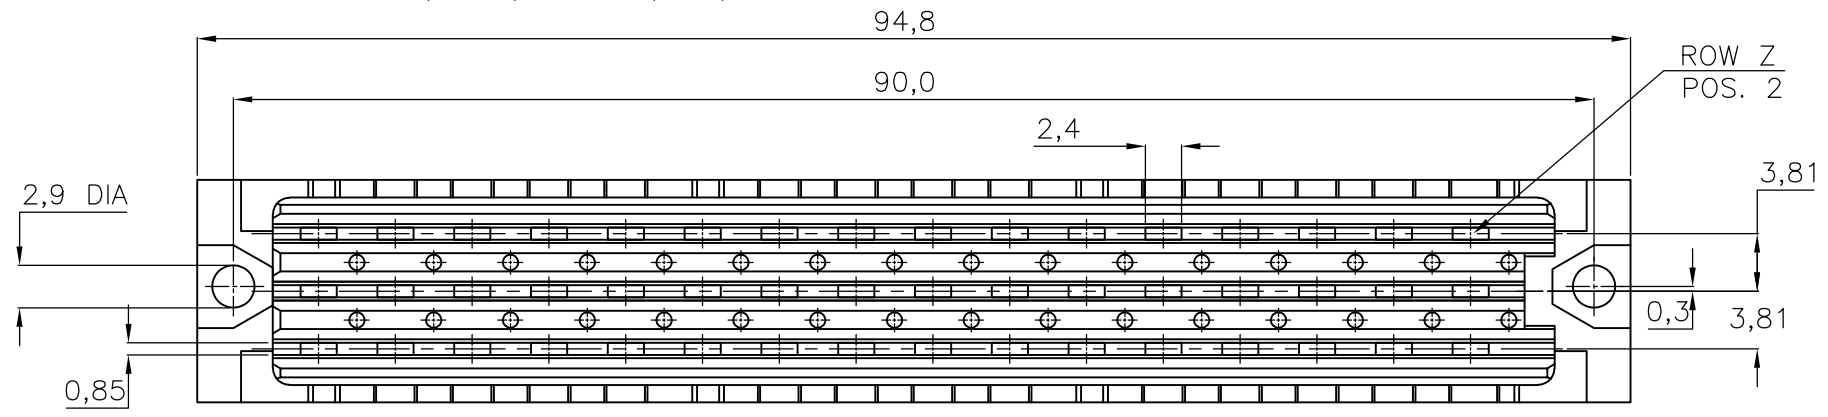

OBSOLETE	SEE NOTE	SEE NOTE	9-166733-4
OBSOLETE	2	1	166733-8
OBSOLETE			166733-7
			166733-4
			166733-1
	FINISH	MATERIAL	PARTNUMBER

ROW	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
z	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
b	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
d	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
POS	32	30	28	26	24	22	20	18	16	14	12	10	8	6	4	2

AN ASTERISK „X” DENOTES A CONTACT.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	R.V.LOKVEN	28JUN91
CHK	J.GIBBELS	27MAY97
APVD	-	-
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	-	

STE TE Connectivity

3x16 POS. TYPE F FEMALE
B. T. B. SOLDER CONNECTOR

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-166733	-

CUSTOMER DRAWING SCALE NTS SHEET 1 OF 1 REV G

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)