


DO NOT SCALE

DIMENSIONS IN mm

METRIC



THIRD ANGLE

PROJECTION



P.C.B. HOLE DIM. ACTION PIN

DRILLED HOLE	:1,60 ±0,025 mm
FIN. HOLE	:1,39 to 1,54 mm
AFTER REFLOW	:1,37 to 1,54 mm
Cu-thks	:0,025 to 0,075 mm
SnPb-thks	:0,004 to 0,010 mm

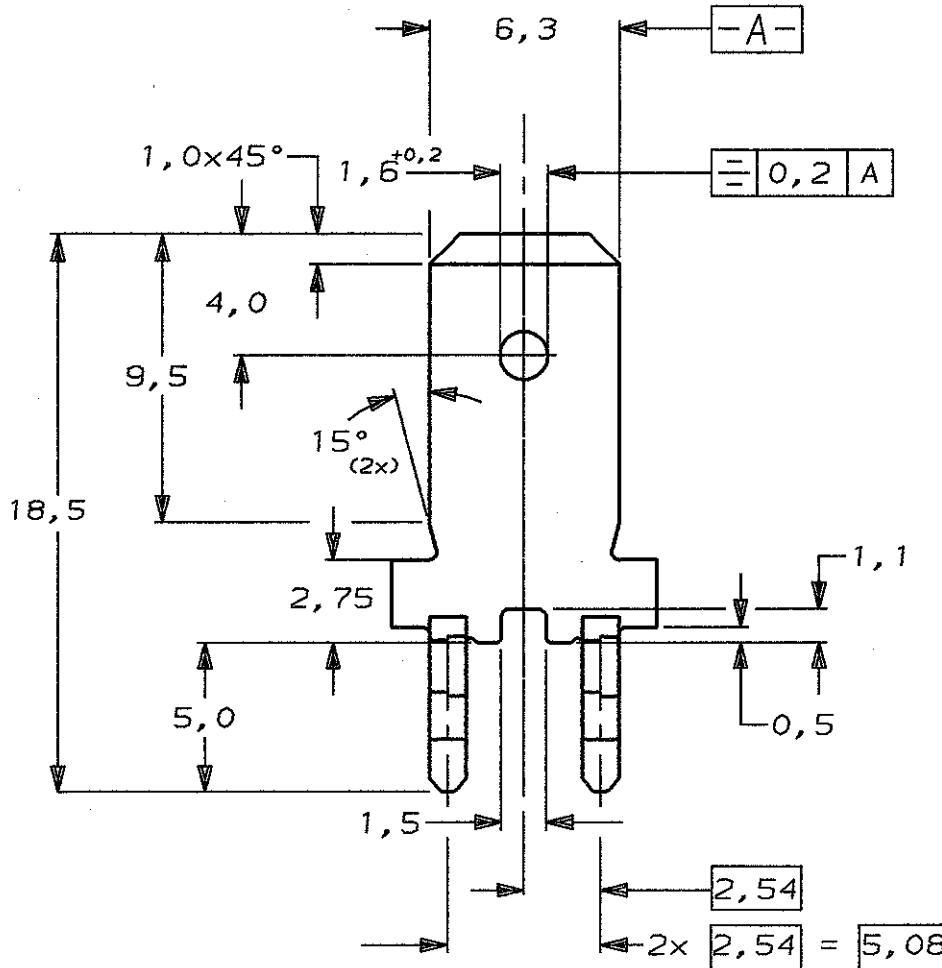

2,54µM MIN. SNPB (93/7) ALL OVER.	PHOSPHORBRONZE	216926-1
FINISH	MATERIAL	PARTNUMBER

CUSTOMER DRAWING



AMP-HOLLAND B.V.
's-Hertogenbosch, The Netherlands.

FOR REFERENCE ONLY
WILL NOT BE UPDATED

THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION FROM 19-
© COPYRIGHT 19- BY AMP-HOLLAND B.V.
ALL INTERNATIONAL RIGHTS RESERVED.
AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR
PATENTS PENDING.

DR. S.MEEUWSEN	DATE 01-03-90	WIRE RANGE -	NAME .250'' SERIES TAB WITH ACTION PIN, FOR POSITIVE LOCK RECEPTACLE. (1,6-3,2 P.C.BOARD THK'S). LOOSE PIECE VERSION.	REV. DATE D M Y 19 02 91
CHK. R.V.LOKVEN	DATE 03-04-90	INSUL. RANGE -	SIZE A4	REV. LTR. B
APP. L.V.SOEST.	DATE 03-04-90	SHEET	DWG. No. C-216926	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)