
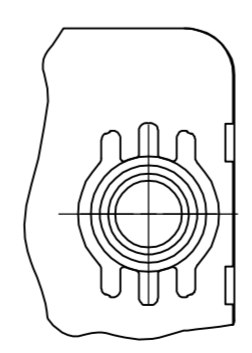
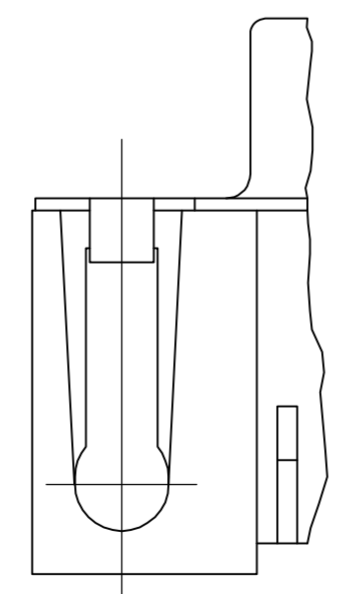
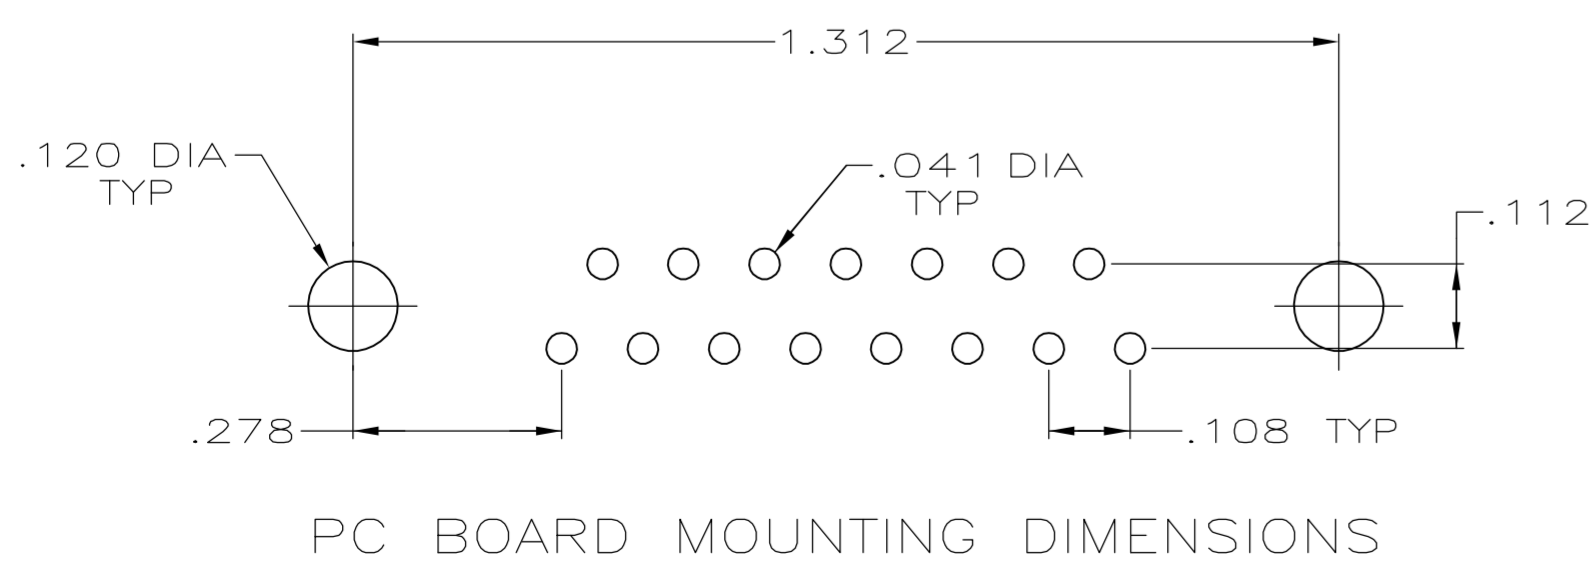
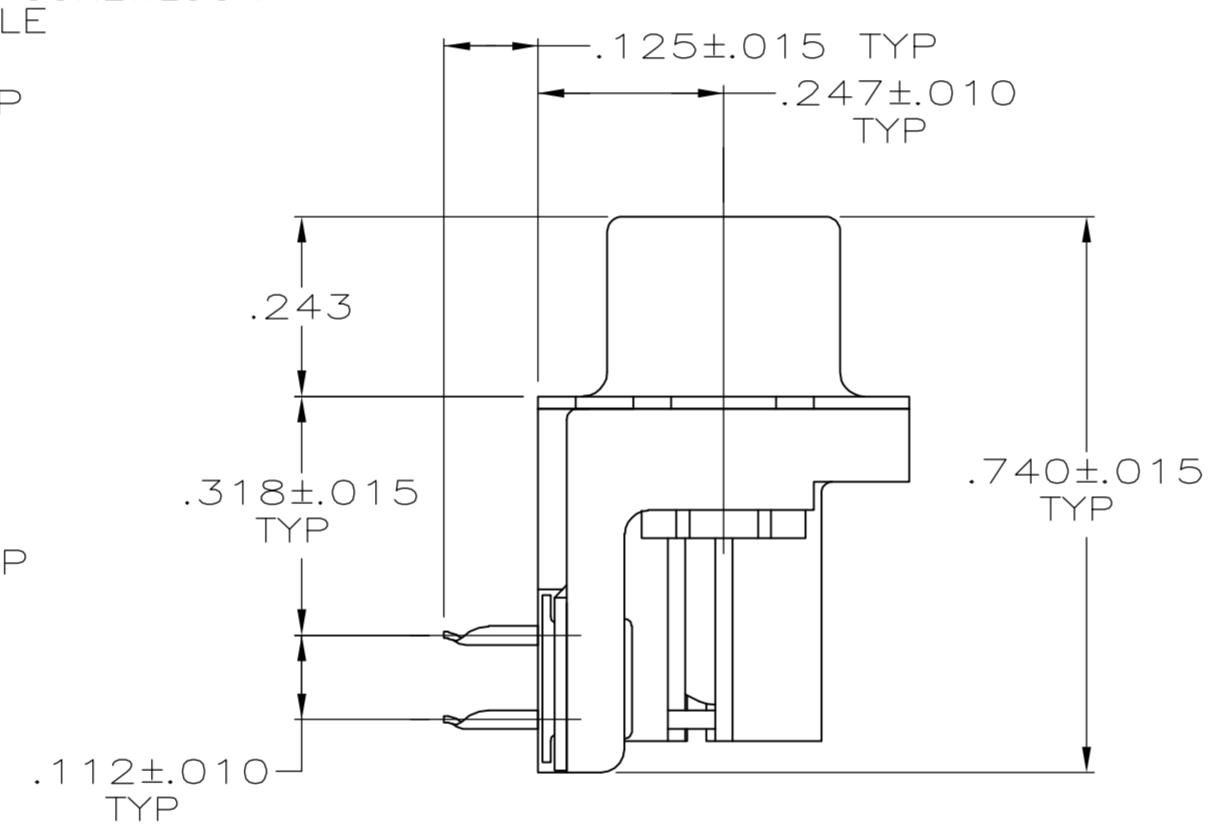


- CONNECTOR MATES WITH ANY 15 POSN PLUG IN AMPLIMITE™ SERIES & COMPLIES WITH AMP SPEC 108-40005 WHERE APPLICABLE.
- MOLDED PARTS: FLAME RETARDANT 94V-0 RATED THERMOPLASTIC, BLACK.
 SHELL: STEEL PER ASTM A109
 CONTACTS: PHOSPHOR BRONZE PER QQ-B-750
 EYELETS: BRASS
 SCREWLOCKS: ZINC
 INSERTS: ZINC
- SHELL: TIN PLATED
 CONTACTS: SEE TABLE
 EYELETS: TIN PLATED
 SCREWLOCKS: CLEAR CHROMATE
 INSERTS: CLEAR CHROMATE
- GOLD PLATING PER MIL-G-45204, NICKEL PLATING PER QQ-N-290, TIN PER MIL-T-10727.
- GOLD FLASH FOR A DISTANCE OF .100 MIN FROM MATING END, TIN PLATED .000100-.000200 ON OPPOSITE END, ALL OVER .000050 NICKEL.
- .000030 GOLD FOR A DISTANCE OF .100 MIN FROM MATING END, TIN PLATED .000100-.000200 ON OPPOSITE END, ALL OVER .000050 NICKEL.
- .000015 MIN GOLD FOR A DISTANCE OF .100 MIN FROM MATING END, TIN PLATED .000100-.000200 ON OPPOSITE END, ALL OVER .000030 NICKEL.
- SCREWLOCKS REQUIRED FOR 1--5 CONNECTOR ASSEMBLIES WILL BE BULK PACKED & SHIPPED WITH CONNECTORS.

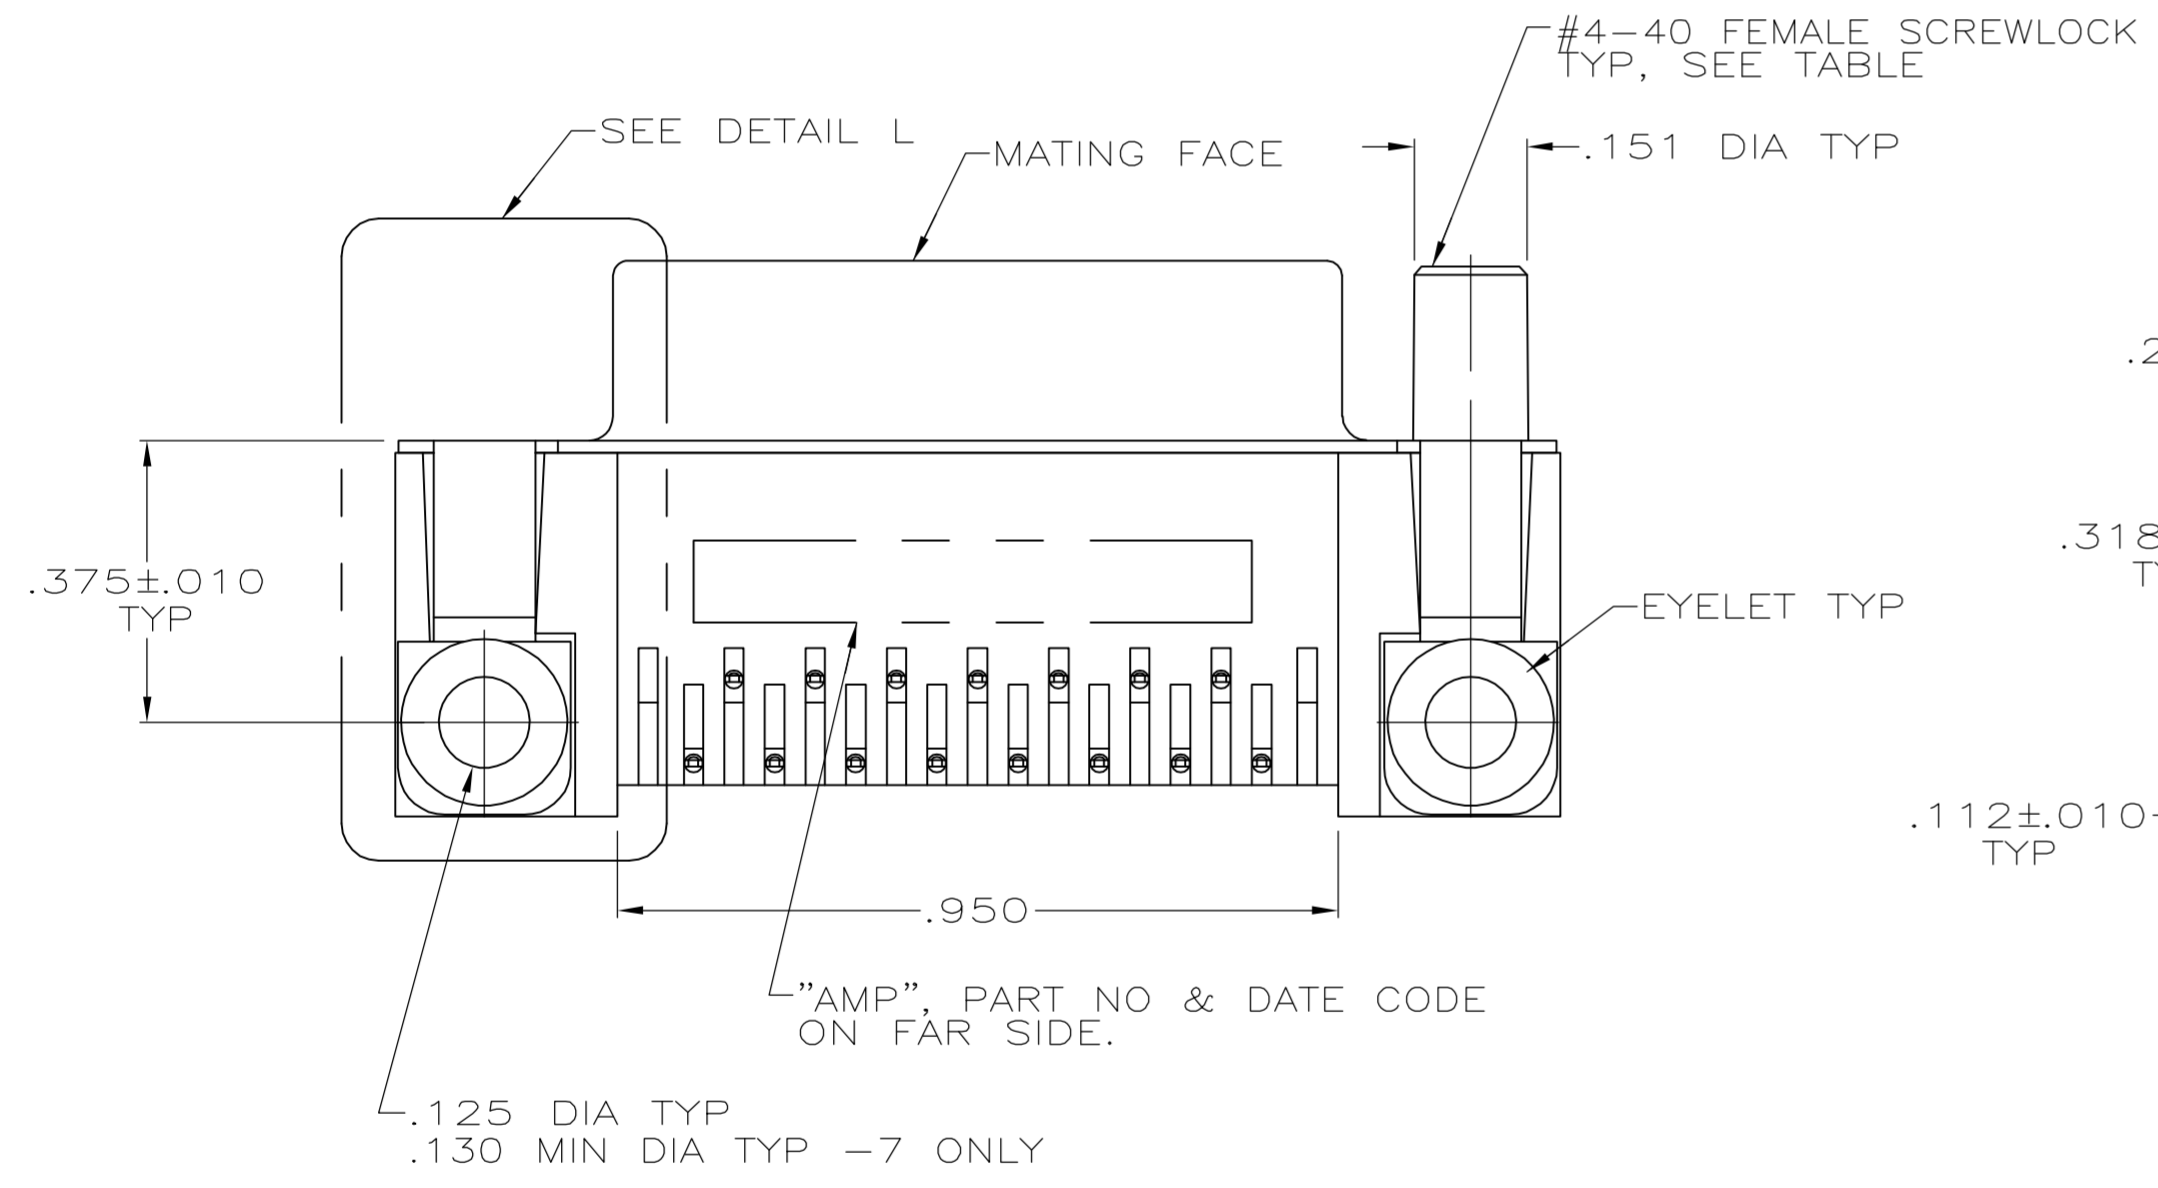

DETAIL L
TYP BOTH ENDS

DETAIL M
FOR -5, -6 & -7 ONLY

SUPSD BY 745782-2	TUBE	NONE	GROUNDING STRAPS	5	1-745782-6
OBSOLETE	-	THREADED INSERTS	GROUNDING STRAPS	6	1-745782-5
OBSOLETE	-	FEMALE SCREWLOCKS	CLINCH TABS (SEE DETAIL L)	6	1-745782-4
OBSOLETE	-	FEMALE SCREWLOCKS	CLINCH TABS (SEE DETAIL L)	5	1-745782-3
OBSOLETE	-	THREADED INSERTS	CLINCH TABS (SEE DETAIL L)	6	1-745782-2
SUPSD BY 1-745782-2	-	THREADED INSERTS	CLINCH TABS (SEE DETAIL L)	5	1-745782-1
OBSOLETE	-	.125 DIA HOLE	CLINCH TABS (SEE DETAIL L)	6	1-745782-0
OBSOLETE	-	.125 DIA HOLE	CLINCH TABS (SEE DETAIL L)	5	745782-9
OBSOLETE	-	NONE	GROUNDING STRAPS	7	745782-8
OBSOLETE	-	FEMALE SCREWLOCKS	GROUNDING STRAPS	7	745782-7
OBSOLETE	-	FEMALE SCREWLOCKS	GROUNDING STRAPS	6	745782-6
SUPSD BY 745782-6	-	FEMALE SCREWLOCKS	GROUNDING STRAPS	5	745782-5
	-	THREADED INSERTS	GROUNDING STRAPS	6	745782-4
SUPSD BY 745782-4	-	THREADED INSERTS	GROUNDING STRAPS	5	745782-3
	-	NONE	GROUNDING STRAPS	6	745782-2
SUPSD BY 745782-2	TRAYS	NONE	GROUNDING STRAPS	5	745782-1
	PACKAGING	MOUNTING HARDWARE	SHELL VERSION	CONTACT FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± .005	4 PLC ± -	ANGLES ± -	FINISH
								3

APVD: J. GALLUCCI, R. STONE

DATE: 1-23-91, 4-26-91

tyco Electronics

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME: RCPT ASSY, SIZE 2, 15 POSN, RTANG, AMPLIMITE HD-20, WITH METAL SHELL, WITH OR WITHOUT SCREWLOCKS OR INSERTS

PRODUCT SPEC: 108-40025

APPLICATION SPEC: 114-40010

SIZE: A1

CAGE CODE: 00779

DRAWING NO: 745782

RESTRICTED TO: -

CUSTOMER DRAWING

SCALE: 4:1

SHEET: 1 OF 1

REV: AB

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)

[>>点击查看相关商品](#)