
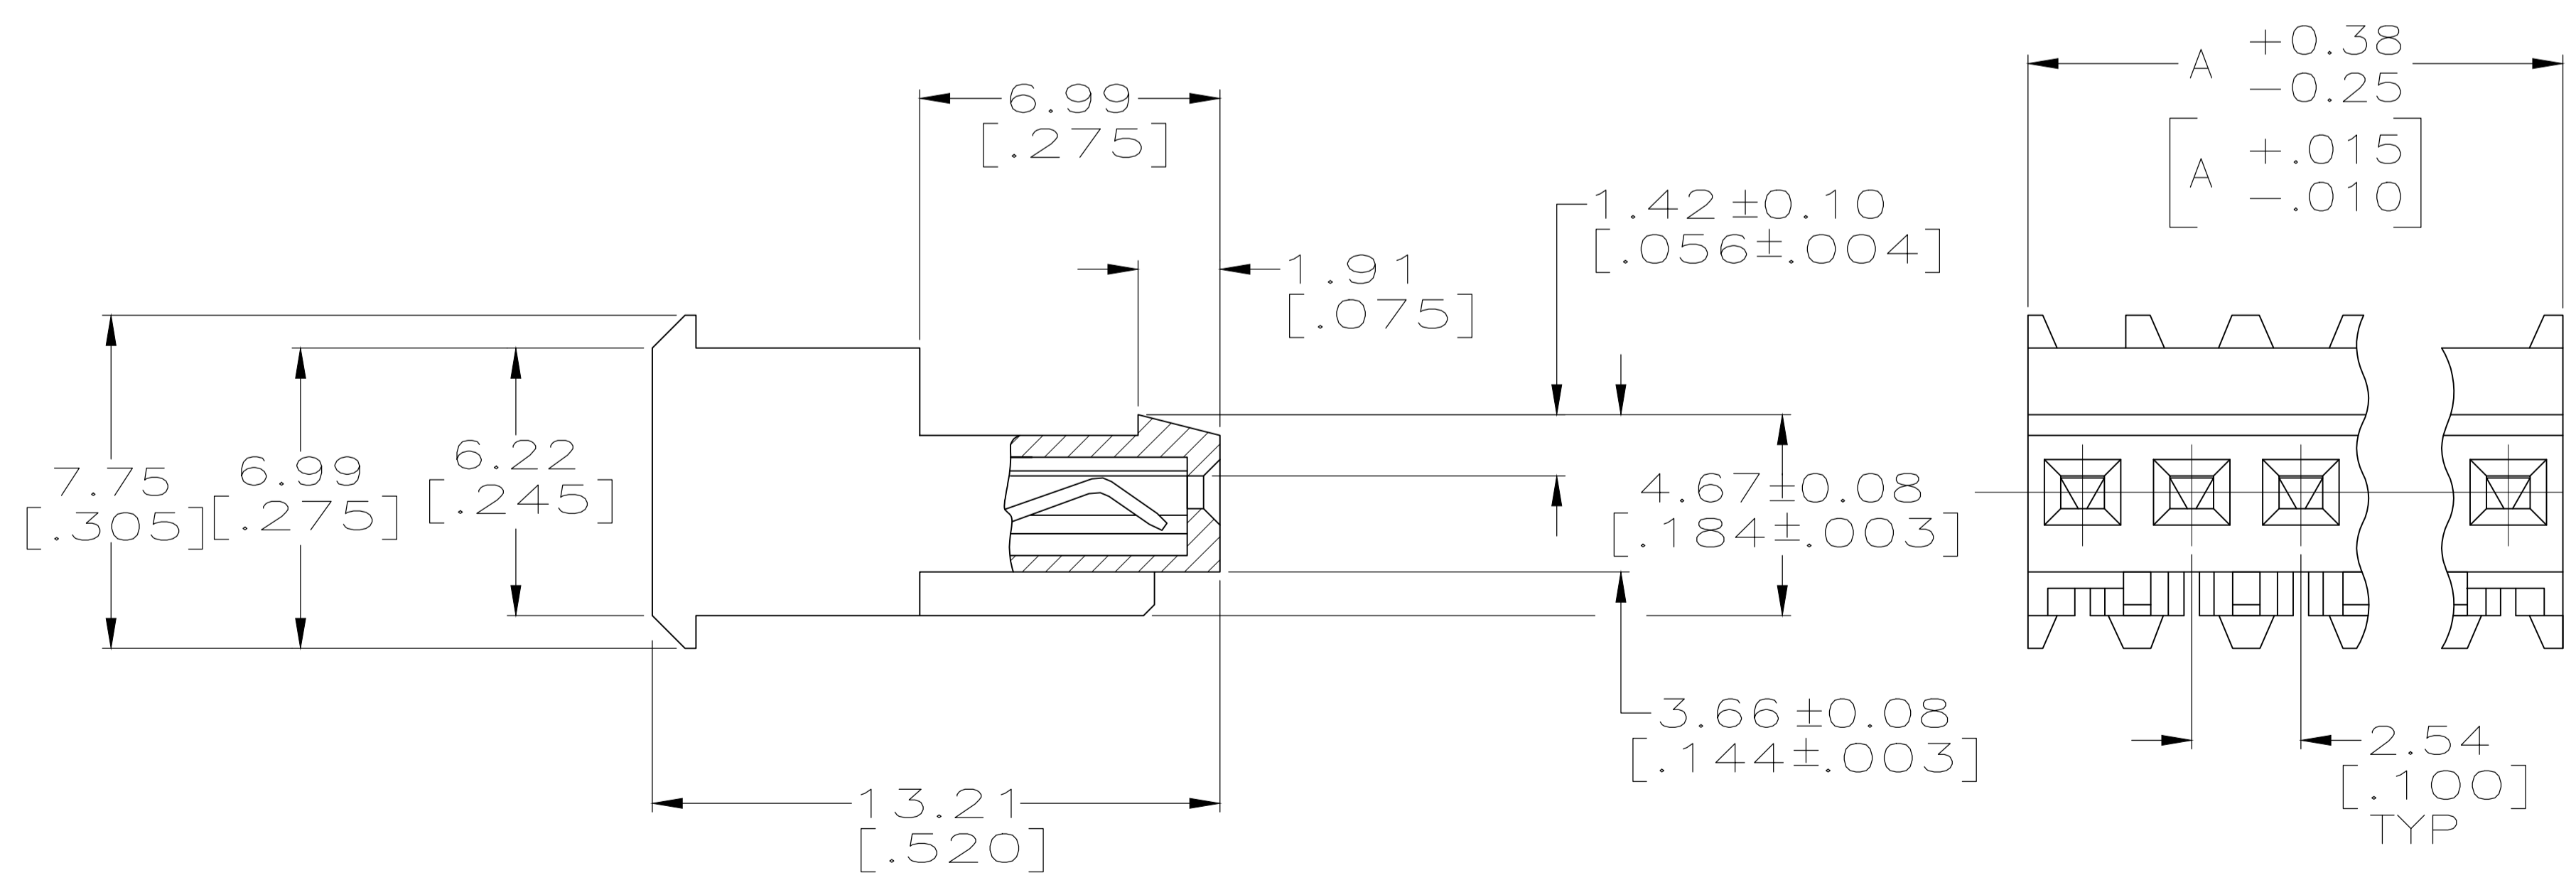


REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVD
L		REVISED PER ECR-20-000721	04MAR2020	PC	SW

- 1 MATERIAL: CONNECTOR-NYLON UL94V-2 (WHITE).
 CONTACTS-0.30 [.012] THICK COPPER ALLOY
 BRIGHT TIN-LEAD 0.00203 [.000080] MINIMUM THICK FOR CONTACTS
 641654-2 THRU 641654-3,
 MATTE WHISKER MITIGATED TIN PLATE 0.00203 [.000080] MINIMUM THICK OVER
 NICKEL UNDERPLATE FOR CONTACTS 3-641654-2 THRU 3-641654-3.
- 2. CONTACTS ACCEPT 24 AWG WIRE WITH 1.52 [.060] MAXIMUM INSULATION DIAMETER.
- 3. CONTACTS MUST ACCEPT 0.64±0.03 [.025±.001] SQUARE POST AND REMAIN
 LOCKED IN POSITION.
- 4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6. HOUSING FEATURES ARE: FEED THRU WITH LOCKING RAMP & LED CONTACT.
- 7 OBSOLETE PARTS

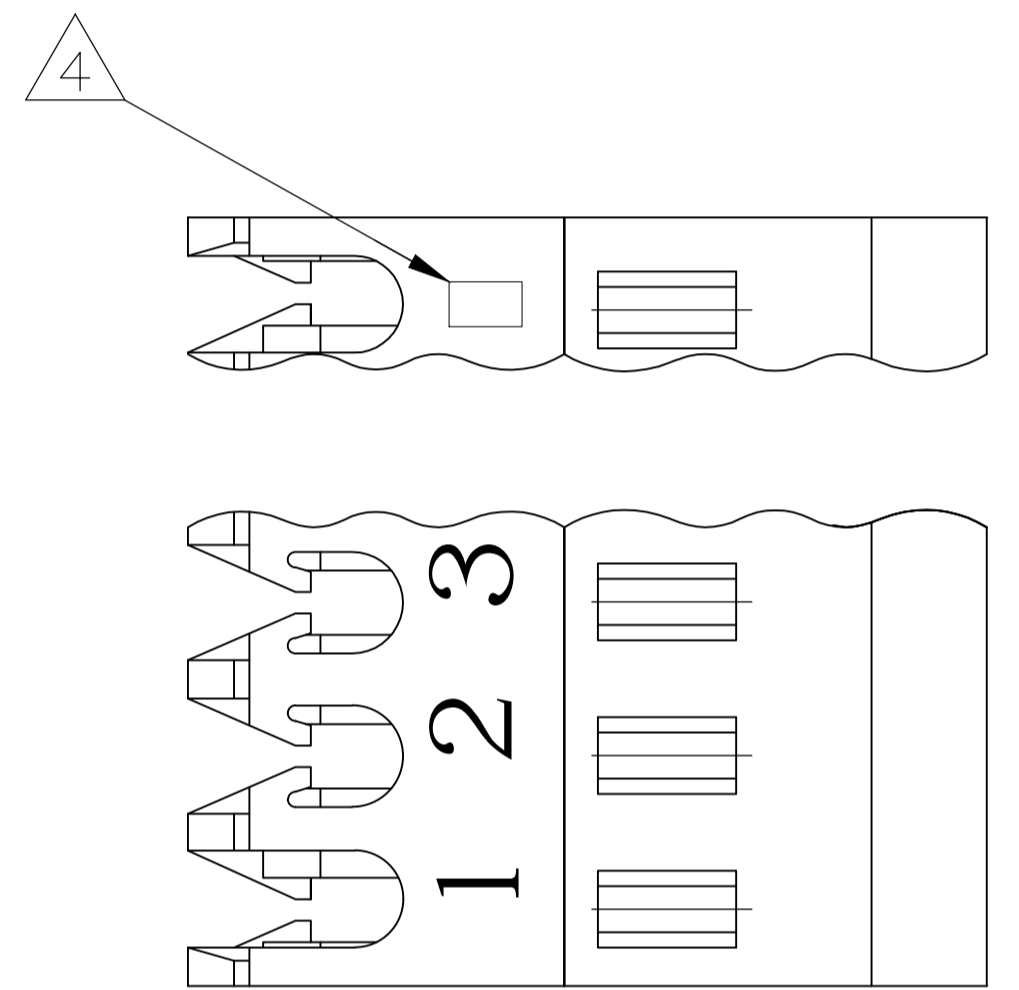

LEAD FREE			
	7.62 [.300]	3	3-641654-3
	5.08 [.200]	2	3-641654-2
	DIM A	NO.OF POSN	ASSEMBLY

△ SUPERSEDED

CONTAINS LEAD			
	7.62 [.300]	3	641654-3
	5.08 [.200]	2	641654-2
	DIM A	NO.OF POSN	ASSEMBLY

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN S. HOOVER 10-DEC-2004	DMN
0 PLC ±	1 PLC ±	10-DEC-2004	PC
2 PLC ±	3 PLC ±	10-DEC-2004	SW
4 PLC ±	ANGLES ±		

APVD: D. ROSSI
 PRODUCT SPEC: 108-1050
 APPLICATION SPEC: 114-1019

MATERIAL: 1 FINISH: 1

TE Connectivity Ltd.
 MTA-100 CONNECTOR ASSEMBLY, 24 AWG, FOR .014 TO .020 POST, SPECIAL

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 641654
 WEIGHT: CUSTOMER DRAWING SCALE: 8:1 SHEET: 1 OF 1 REV: 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)