

# SPECIFICATION CONTROL DRAWING

55PC7011

TITLE

THREE CONDUCTOR CABLE, SHIELDED, JACKETED, NOMEX BRAID, 600 VOLT


Date 12-1-93

Revision

B

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

COMPONENT CABLE - 55PC1831

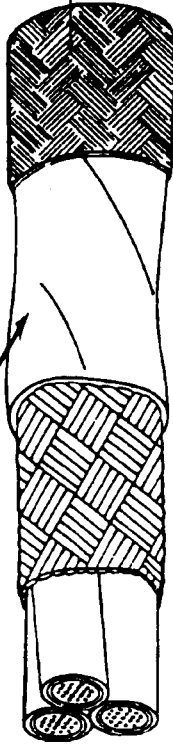

BRAID - NOMEX BRAID TREATED TO PREVENT FRAYING  
COLOR - ORANGE

CONSTRUCTION DETAILS			
PART NUMBER	CONDUCTOR SIZE (AWG)	DIAMETER (in.) TARGET VALUE	WEIGHT (lbs/1000 ft.) TARGET VALUE
55PC7011-16.*	16	.212	41.48

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C  
Maximum continuous conductor temperature  
VOLTAGE RATING: 600 volts (rms)

#### PART NUMBER:

The "" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire color from the jacket color and the jacket color from the braid color.  
Example: AWG 20, red, blue and yellow components; white jacket, orange braid: 55PC7011-20-2/6/4-9-3

**W & C DESIGN**  
RED STAMP - CONTROL COPY  
BLACK STAMP - CHECK FOR  
LATEST ISSUE

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN REFERENCED DOCUMENTS SHALL BE CANCELLED IN EFFECT ON DATE OF INVITATION FOR BID

**Raychem**

Raychem Corporation  
300 Constitution Drive, Menlo Park, California 94025  
1-800-2-Raychem Fax: 1-415-361-8297

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)