
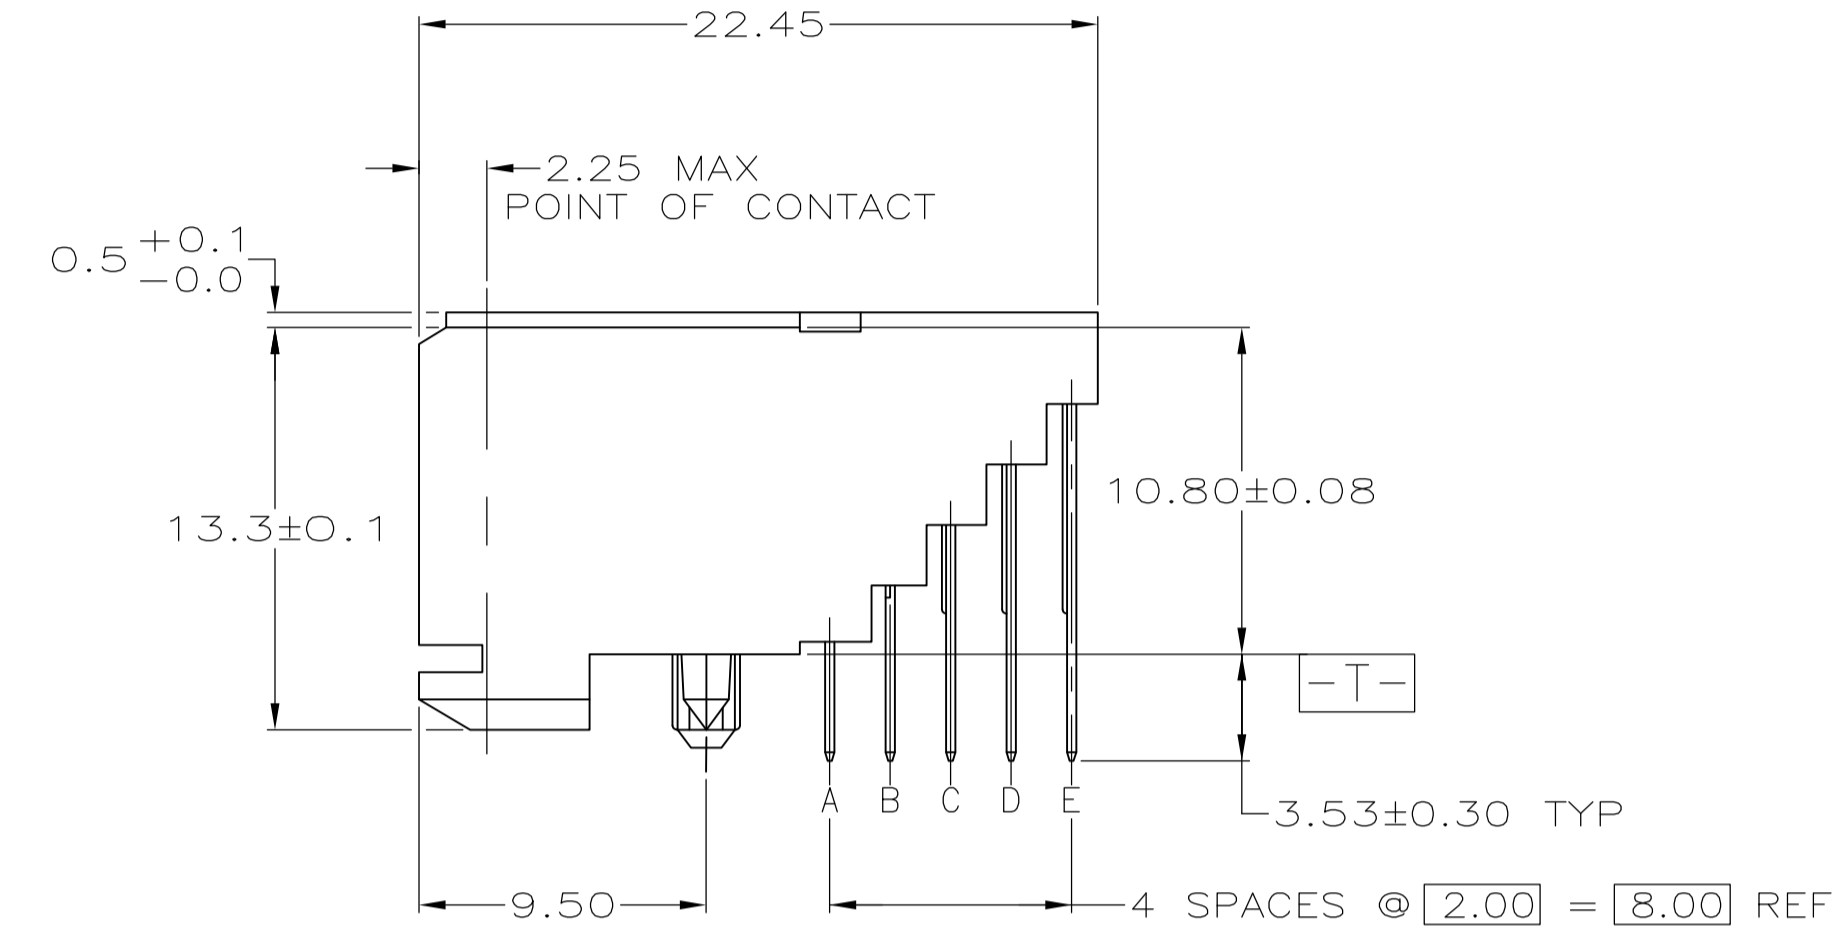
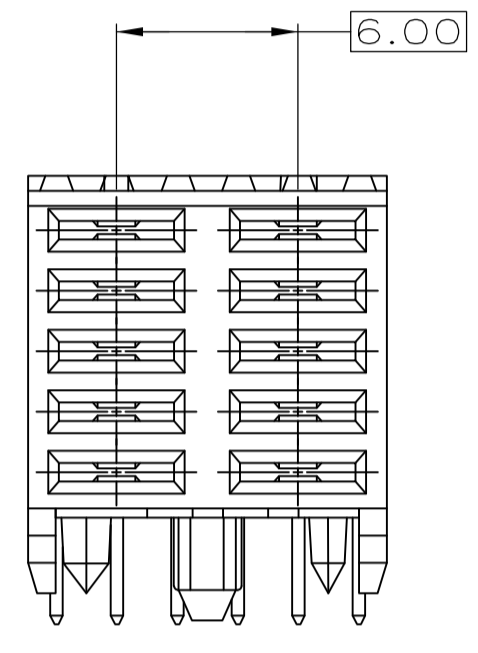




LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DN	APVD		
A1		REVISED PER ECO-08-009182	22APR08	DH	AS		

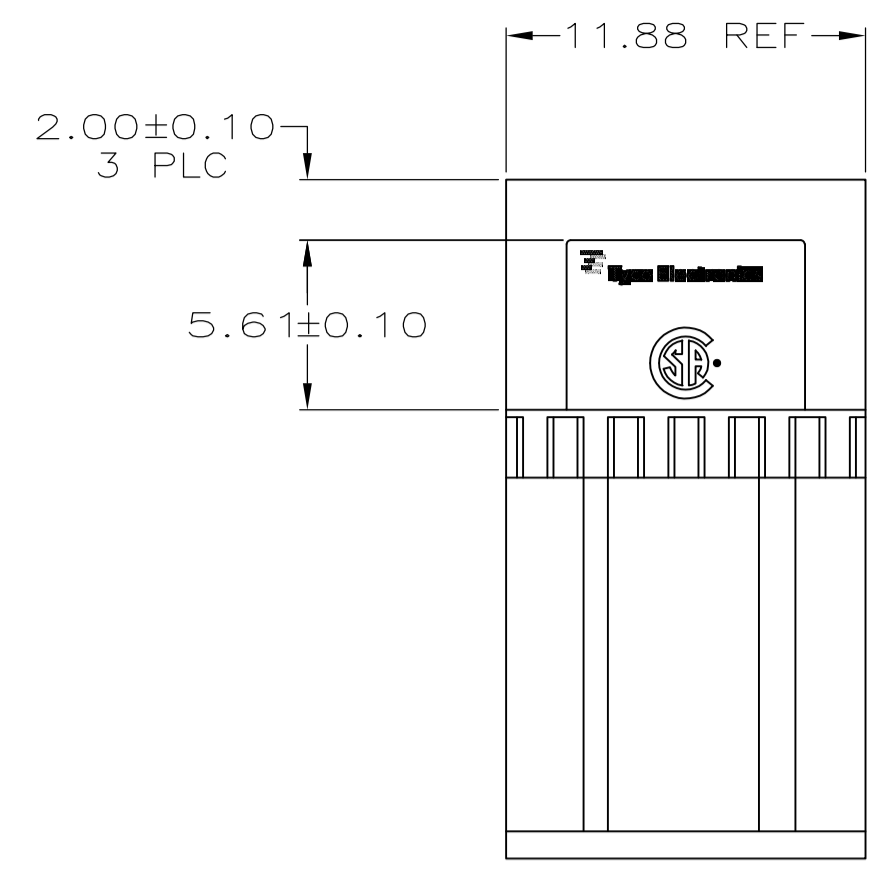


△ HOUSING MATERIAL: LIQUID CRYSTAL POLYMER.  
 COLOR: NATURAL.

△ CONTACT MATERIAL: PHOSPHOR BRONZE.

△ CONTACT FINISH:  
 UNDERPLATE (ENTIRE CONTACT):  
 0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290  
 ON MATING SURFACES:  
 FLASH GOLD PER ASTM B 488, OVER  
 0.00076 MIN PALLADIUM-NICKEL OVER UNDERPLATE, OR  
 0.00076 MIN GOLD PER ASTM B 488 OVER UNDERPLATE.  
 ON LEADS:  
 0.00381 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.  
 LUBRICATION (MIN MATING SURFACES):  
 SURFACE CONDITIONER AFTER PLATING.

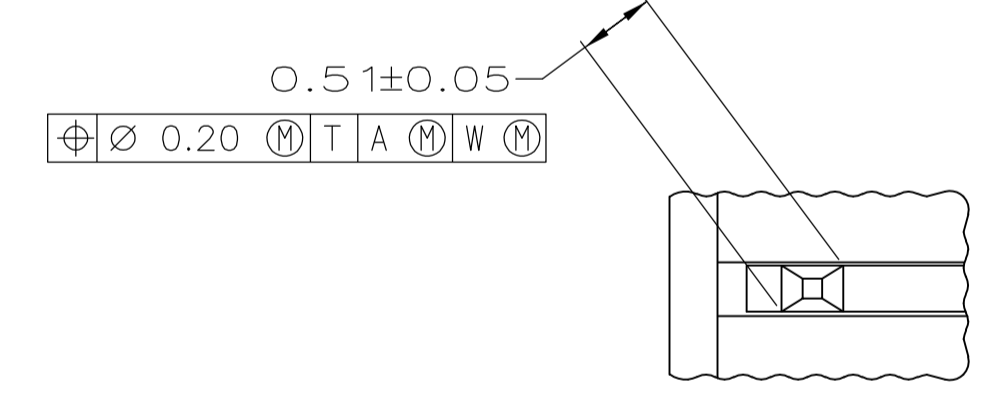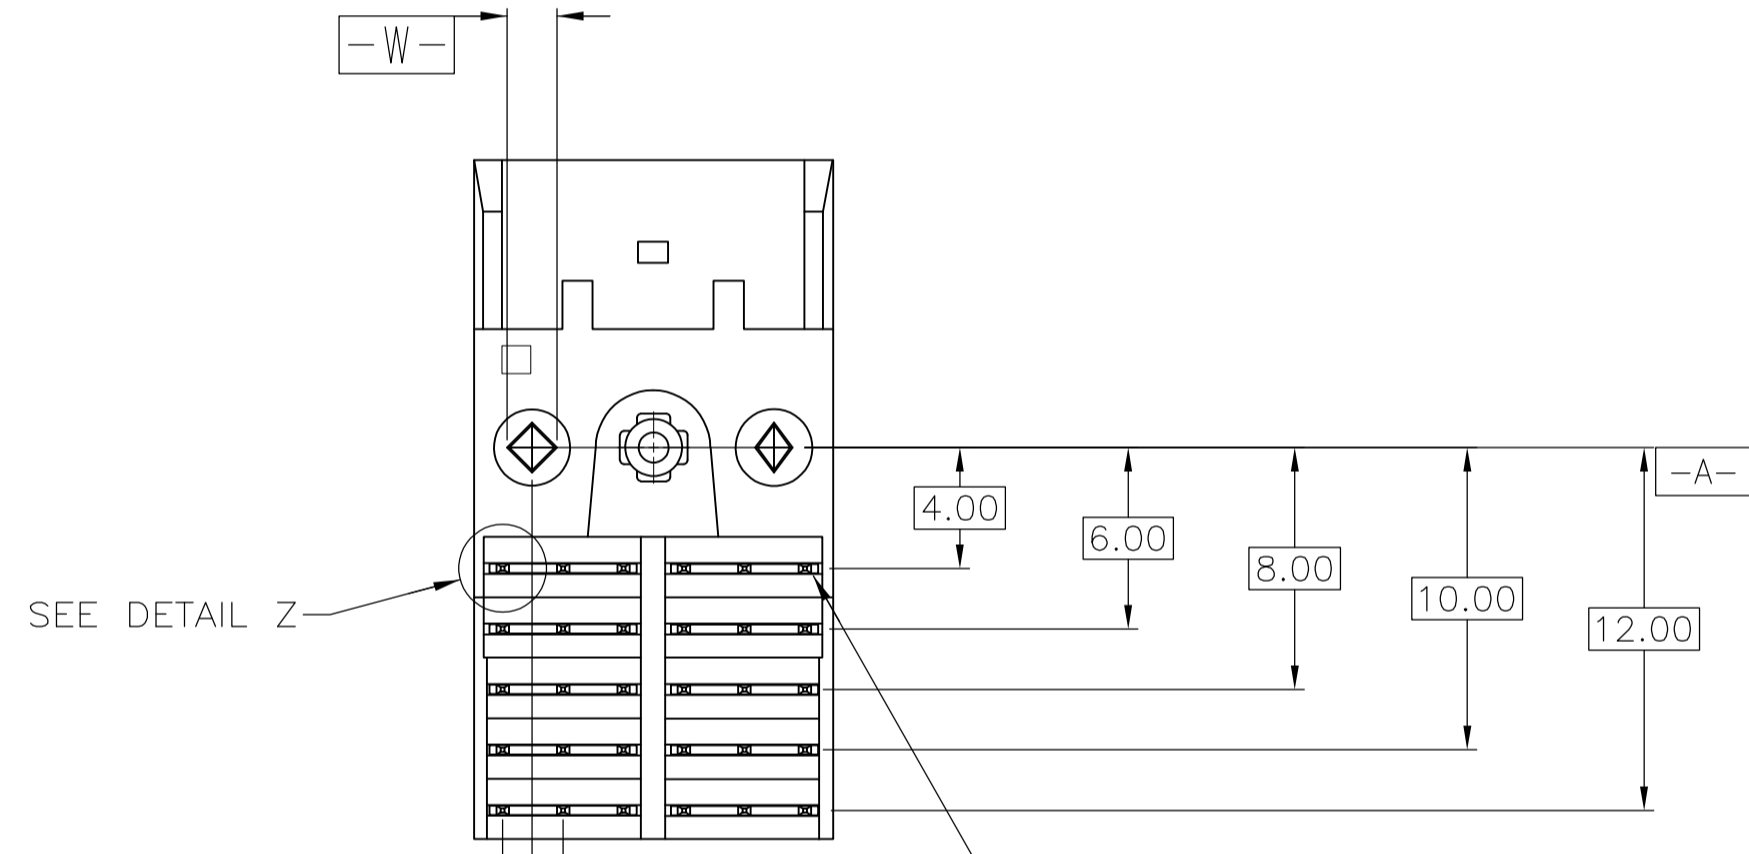

DETAIL Z  
 SCALE 20:1

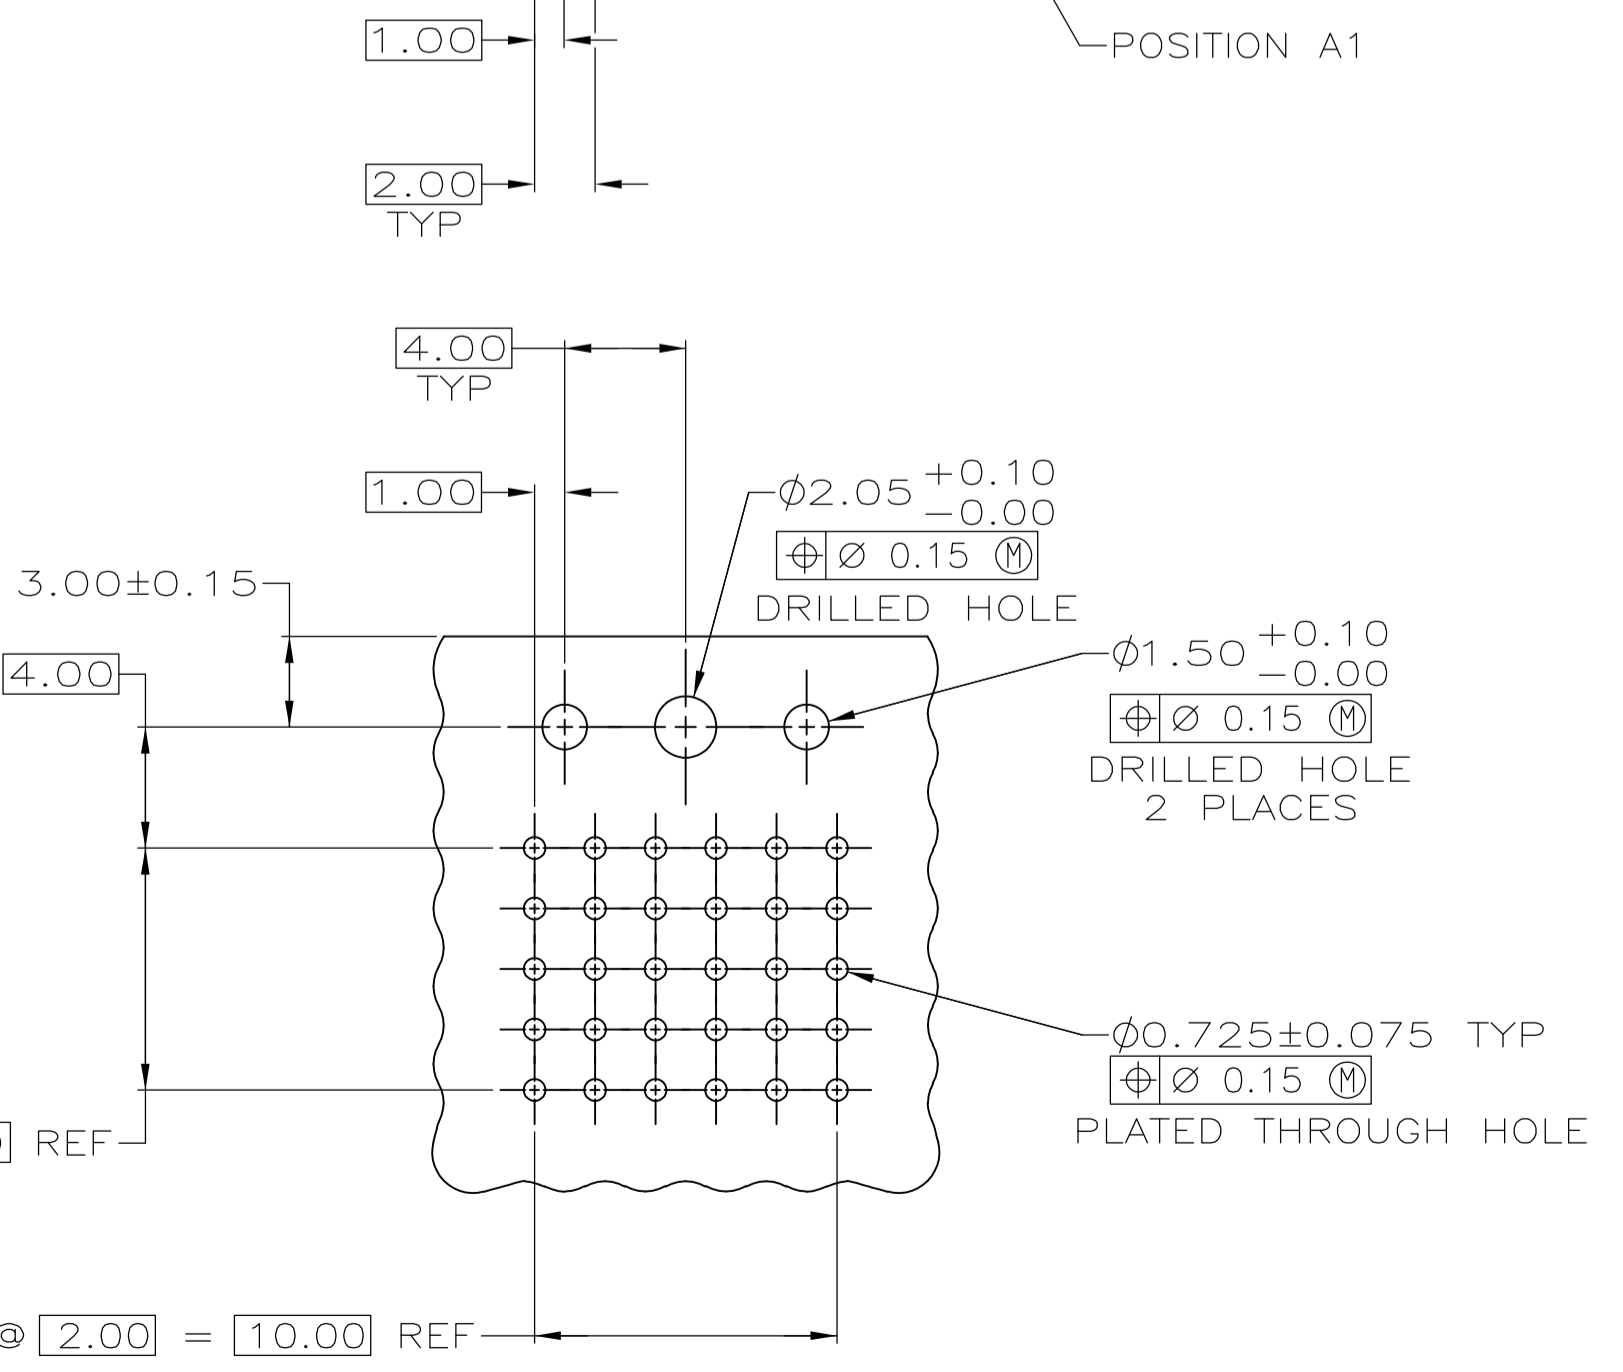

4 SPACES @ 2.00 = 8.00 REF

5 SPACES @ 2.00 = 10.00 REF

RECOMMENDED CIRCUIT PATTERN  
 PER IPC-D300 TYPE II, CLASS 3  
 COMPONENT SIDE

5223093-1  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN T. SHUEY 11-18-98	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK C. SCHMID 11-19-98	NAME RCPT ASSEMBLY, POWER, Z-PACK 2mm FB, 10 POSITION, RIGHT ANGLE, SOLDER LEADS	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. SCHMID 11-19-98	RESTRICTED TO	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± 0.013 4 PLC ± - ANGLES ± -		PRODUCT SPEC	SIZE A1	CAGE CODE 00779
MATERIAL		APPLICATION SPEC	DRAWING NO 5223093	SCALE 4:1
FINISH		WEIGHT	SHEET 1 OF 1	REV A1
CUSTOMER DRAWING				

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)