


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		W	ECO-06-029064	14DEC06	MB	JG
			W1	REVISED PER ECO-09-020689	25AUG09	KK	AEG

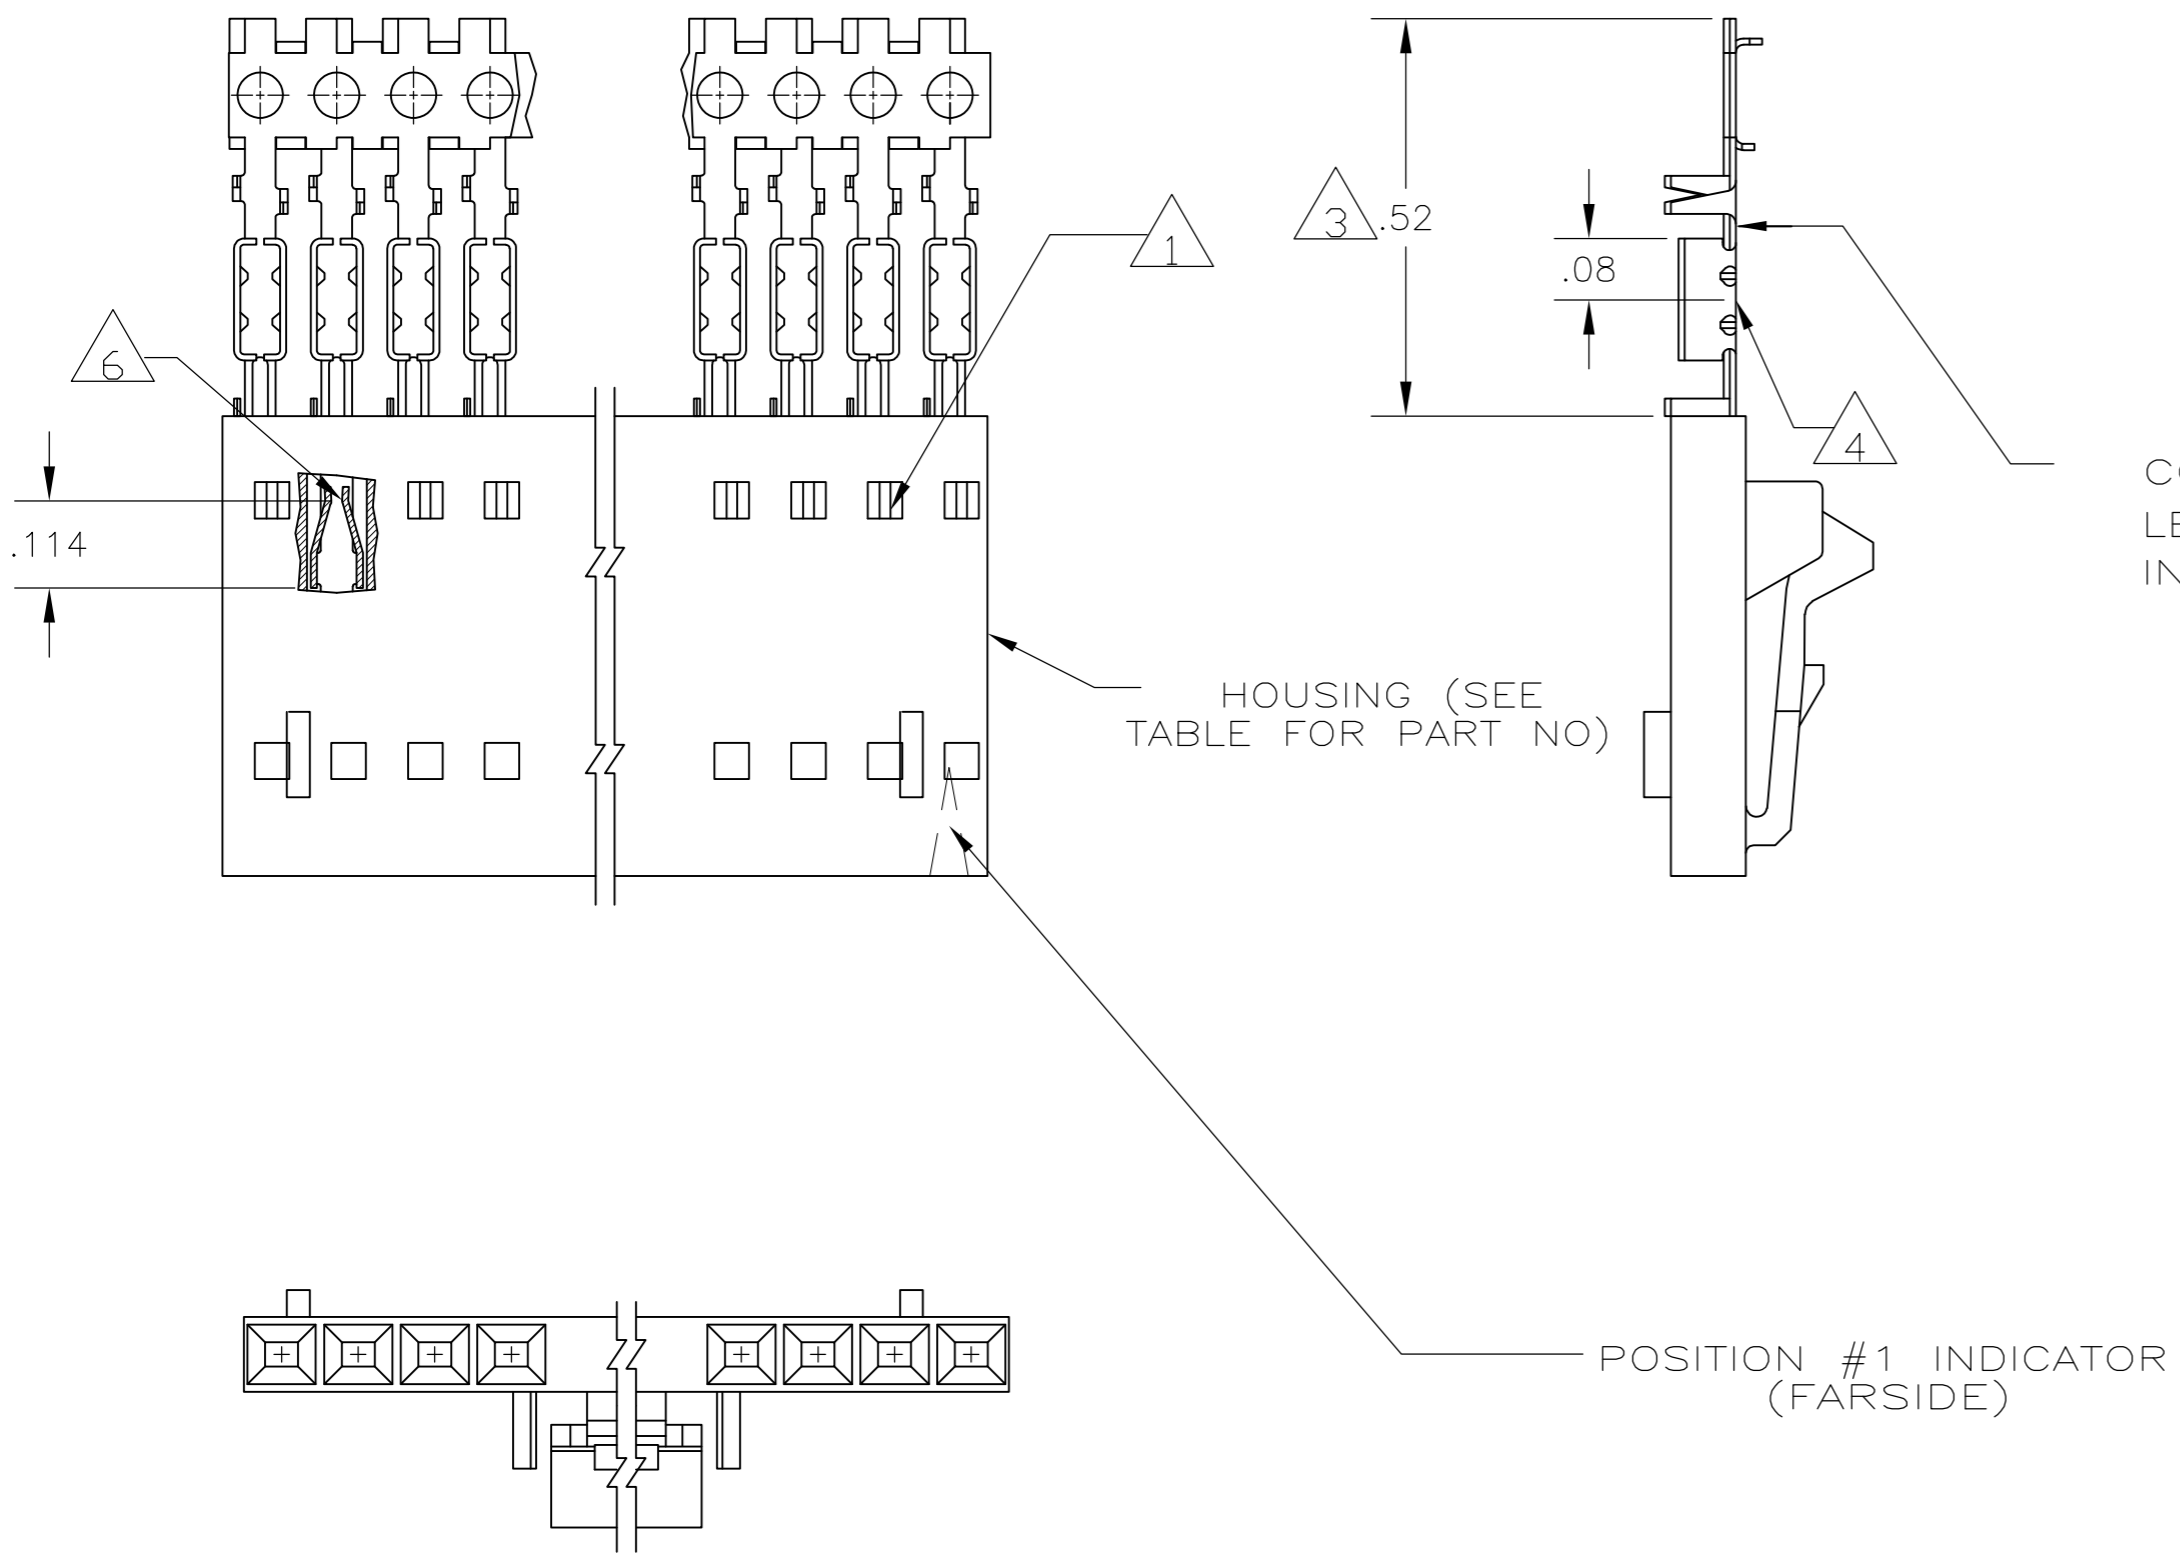

CONTACT IDENTIFICATION LETTER "B" (LOCATED IN THIS AREA)

8	2-104257-4	25	7-103734-4	
	2-104257-3	24	7-103734-3	
	2-104257-2	23	7-103734-2	
	2-104257-1	22	7-103734-1	
	2-104257-0	21	7-103734-0	
	1-104257-9	20	6-103734-9	
	1-104257-8	19	6-103734-8	
	1-104257-7	18	6-103734-7	
	1-104257-6	17	6-103734-6	
	1-104257-5	16	6-103734-5	
	1-104257-4	15	6-103734-4	
	1-104257-3	14	6-103734-3	
	1-104257-2	13	6-103734-2	
	2-104257-4	25	2-103734-4	
	2-104257-3	24	2-103734-3	
	2-104257-2	23	2-103734-2	
	2-104257-1	22	2-103734-1	
	2-104257-0	21	2-103734-0	
	1-104257-9	20	1-103734-9	
	1-104257-8	19	1-103734-8	
	1-104257-7	18	1-103734-7	
	1-104257-6	17	1-103734-6	
	1-104257-5	16	1-103734-5	
	1-104257-4	15	1-103734-4	
	1-104257-3	14	1-103734-3	
	1-104257-2	13	1-103734-2	
	1-104257-1	12	1-103734-1	
	1-104257-0	11	1-103734-0	
	104257-9	10	103734-9	
	104257-8	9	103734-8	
	104257-7	8	103734-7	
	104257-6	7	103734-6	
	104257-5	6	103734-5	
	104257-4	5	103734-4	
	104257-3	4	103734-3	
	104257-2	3	103734-2	
	104257-1	2	103734-1	
7	PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER

SUPERSEDED BY 1-103958-1  
 SUPERSEDED BY 1-103958-0  
 SUPERSEDED BY 103958-9  
 SUPERSEDED BY 103958-8  
 SUPERSEDED BY 103958-7  
 SUPERSEDED BY 103958-6  
 SUPERSEDED BY 103958-5  
 SUPERSEDED BY 103958-4  
 SUPERSEDED BY 103958-3  
 SUPERSEDED BY 103958-2  
 SUPERSEDED BY 103958-1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103958
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 FINISH: CONTACTS- .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 8 FINISH: CONTACTS- .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN 04 NOV 1986  
 L MAYER  
 CHK 11-12-86  
 P. DE JONG  
 APVD 11-12-86  
 P. DE JONG  
 PRODUCT SPEC 108-25034  
 APPLICATION SPEC 114-25026  
 MATERIAL: HOUSING- FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK  
 CONTACTS-PHOS BRONZE  
 FINISH SEE TABLE  
 Tyco Electronics Corporation Harrisburg, Pa 17105-3608  
 NAME RCPT ASSY, AMPMODU MTE, SINGLE, LATCHED & POLARIZED, FOR #22-#26 AWG WIRE SIZE  
 SIZE A2 CAGE CODE 00779 DRAWING NO 103734 RESTRICTED TO  
 WEIGHT - SCALE 4:1 SHEET 1 OF 1 REV W1  
 CUSTOMER DRAWING

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)