


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
K		REVISED PER ECO-15-011608	04NOV2015	NK	MZ
L		REVISED PER ECO-16-015569	03NOV2016	RS	MZ
M		REVISED PER ECO-17-013721	16NOV2017	RS	MZ

- 1 FINISH-SILVER PLATE 5.08um [200u"] THICK MIN.
 - 2 FINISH-NICKEL PLATE 1.12um [40u"] THICK MIN.
 - 3 FINISH-GOLD PLATE 0.25um [10u"] THICK MIN.
 - 4 FINISH-GOLD PLATE 1.02um [40u"] THICK MIN.
 - 5 FINISH-GOLD PLATE 1.27um [50u"] THICK MIN.
 - 6 FINISH-NICKEL PLATE 2.54um [100u"] THICK MIN.
 - 7 FINISH-GOLD PLATE 0.76um [30u"] THICK MIN.
 - 8 FINISH-GOLD PLATE 0.51um [20u"] THICK MIN.
 - 9 FINISH-NICKEL PLATE 1.27um [50u"] THICK MIN.
 - 10 FINISH-TIN PLATE 5.08um [200u"] THICK MIN.
 - 11 PLATING NOTES ARE TO BE INTERPRETED AS FOLLOWS, 6-8 AS 6 OVER 8.
 - 12 MATERIAL: CDA172, BeCu.
 - 13 MATERIAL: STAINLESS STEEL.
 - 14 PRODUCT IS SOLD BY THE FOOT.
- △15 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

STYLE	LH	(FREE DIA)	LENGTH	MATING PIN φ REF	PLATING (NOTE)	NUM LOUV	MAT'L (NOTE)	MAT'L THK	REF	PART NO.	
A	[.022]	[.14]	--	2.36[.093]	3-2	11	12	0.12[.005]	04124	5-192041-0	
-	-	-	--	--	--	--	--	--	--	4-192041-9	
A	[.022]	[.14]	--	2.36[.093]	1-2	11	12	0.12[.005]	04164	4-192041-8	OBSOLETE
A	[.022]	[.14]	--	2.36[.093]	UNPL	11	12	0.12[.005]	04136	4-192041-7	
									04015	4-192041-6	△15
									04013	4-192041-5	
A	[.030]	[.11]	--	2.03[.080]	3-2	8	12	0.15[.006]	04010	4-192041-4	OBSOLETE
A	[.030]	[.11]	--	2.03[.080]	1-2	8	12	0.15[.006]	04200	4-192041-3	OBSOLETE
A	[.030]	[.11]	--	2.03[.080]	UNPL	8	12	0.15[.006]	04083	4-192041-2	
A	[.022]	[.09]	--	1.57[.062]	3-2	7	12	0.15[.006]	04008	4-192041-1	
A	[.022]	[.09]	--	1.57[.062]	1-2	7	12	0.15[.006]	04137	4-192041-0	OBSOLETE
A	[.022]	[.09]	--	1.57[.062]	--	7	12	0.15[.006]	04114	3-192041-9	OBSOLETE
A	[.022]	[.09]	--	1.57[.062]	UNPL	7	12	0.15[.006]	04061	3-192041-8	OBSOLETE
A	[.016]	[.09]	--	1.57[.062]	UNPL	7	13	0.12[.005]	04009	3-192041-7	
A	[.024]	[.09]	--	1.57[.062]	5-2	7	12	0.12[.005]	04147	3-192041-6	OBSOLETE
A	[.024]	[.09]	--	1.57[.062]	1-2	7	12	0.12[.005]	04212	3-192041-5	△15
C	[.024]	[.09]	--	1.57[.062]	UNPL	7	12	0.12[.005]	04081	3-192041-4	
-	[.022]	[.08]	--	1.02[.040]	4-2	5	12	0.12[.005]	04142	3-192041-3	OBSOLETE
A	[.022]	[.08]	--	1.02[.040]	3-2	5	12	0.12[.005]	04006	3-192041-2	OBSOLETE
A	[.022]	[.08]	--	1.02[.040]	1-2	5	12	0.12[.005]	04213	3-192041-1	OBSOLETE
A	[.022]	[.08]	--	1.02[.040]	UNPL	5	12	0.12[.005]	04005	3-192041-0	
A	[.018]	[.06]	--	0.63[.025]	3-2	4	12	0.12[.005]	04004	2-192041-9	OBSOLETE
C	[.028]	[.46]	--	--	1-2	15	12	0.20[.008]	04168	2-192041-8	
C	[.028]	[.46]	--	--	UNPL	15	12	0.20[.008]	04166	2-192041-7	
C	[.030]	[.46]	--	--	1-2	15	12	0.15[.006]	04162	2-192041-6	
-	-	-	--	--	--	--	--	--	--	2-192041-5	
C	[.036]	[.37]	--	--	1-2	12	12	0.15[.006]	04218	2-192041-4	
									--	2-192041-3	OBSOLETE
									--	2-192041-2	△15
									--	2-192041-1	
									--	2-192041-0	
									--	1-192041-9	
									--	1-192041-8	OBSOLETE
									--	1-192041-7	△15
C	[.028]	NOTE 14	--	--	3-2	--	12	0.20[.008]	04098	1-192041-6	OBSOLETE
C	[.028]	NOTE 14	--	--	1-2	--	12	0.20[.008]	04149	1-192041-5	OBSOLETE
C	[.028]	NOTE 14	--	--	UNPL	--	12	0.20[.008]	04099	1-192041-4	
C	[.028]	NOTE 14	--	--	3-2	--	12	0.15[.006]	04002	1-192041-3	OBSOLETE
C	[.026]	NOTE 14	--	--	1-2	--	12	0.15[.006]	04119	1-192041-2	
C	[.028]	NOTE 14	--	--	1-2	--	12	0.15[.006]	04210	1-192041-1	
C	[.028]	NOTE 14	--	--	UNPL	--	12	0.15[.006]	04109	1-192041-0	
C	[.016]	NOTE 14	--	--	1-2	--	13	0.12[.005]	04211	1-192041-9	
C	[.026]	NOTE 14	--	--	3-2	--	12	0.12[.005]	04148	1-192041-8	
C	[.026]	NOTE 14	--	--	UNPL	--	12	0.12[.005]	04000	1-192041-7	
									--	1-192041-6	OBSOLETE
									--	1-192041-5	
									--	1-192041-4	
									--	1-192041-3	
									--	1-192041-2	
									--	1-192041-1	

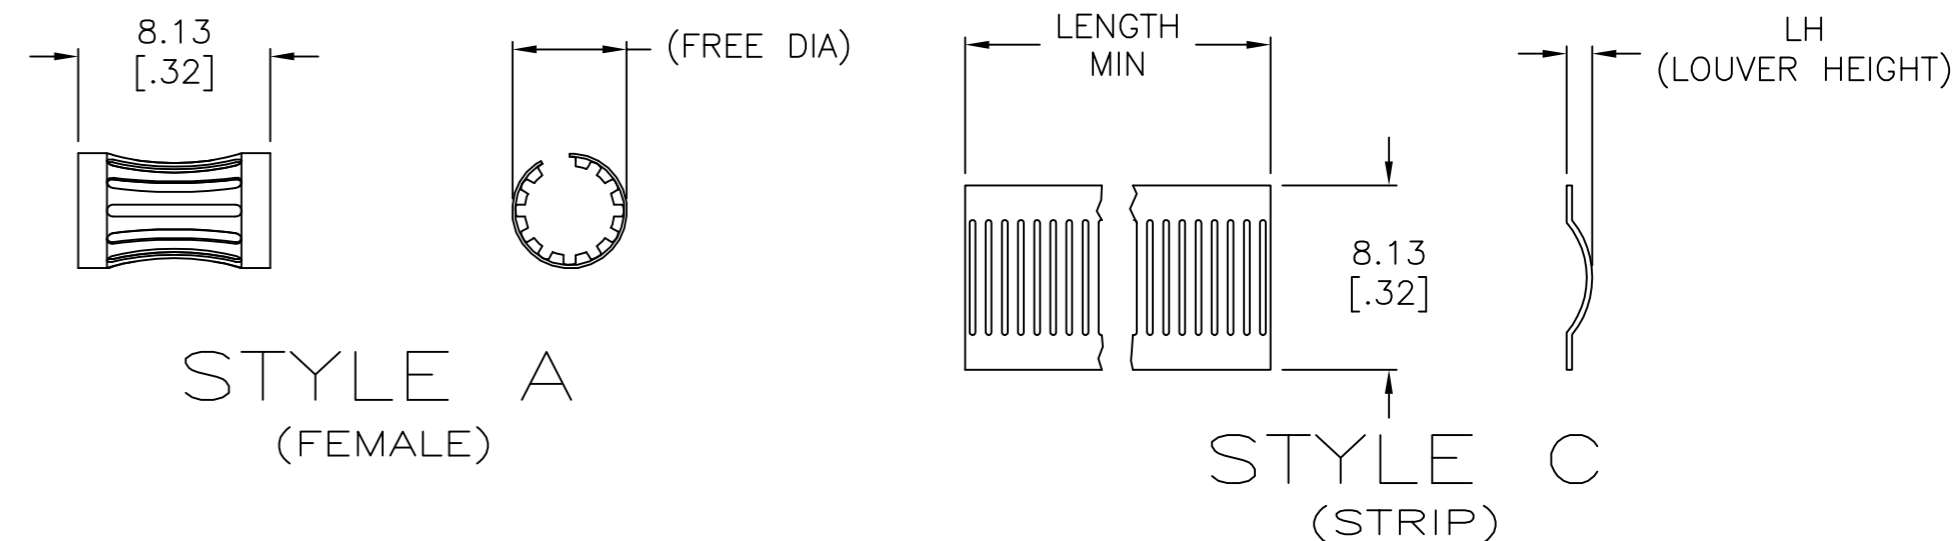


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	-	STE TE Connectivity	
DIMENSIONS: mm		CHK	J.TURNER 07-21-93		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	-	CONTACT BAND, LAIV, FEMALE	
0 PLC ± -		PRODUCT SPEC	-		
1 PLC ± -		APPLICATION SPEC	-	SIZE	A2
2 PLC ± 0.5 [.02]		WEIGHT	-	CAGE CODE	00779
3 PLC ± 0.25 [.010]		CUSTOMER DRAWING	-	DRAWING NO	C=192041
4 PLC ± -		SCALE	1:1	RESTRICTED TO	-
ANGLES ± -		SHEET	1 of 2	REV	M
FINISH					

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
-	-	SEE SHEET 1	-	-

STYLE	LH	(FREE DIA)	LENGTH	MATING PIN ϕ REF	PLATING (NOTE)	NUM LOUV	MAT'L (NOTE)	MAT'L THK	REF	PART NO.	STATUS	
A	[.026]	[.23]	-- 5.00	[.197]	1-2	19	12	0.20	[.008]	04170	9-192041-9	OBSOLETE
A	[.026]	[.23]	-- 5.00	[.197]	UNPL	19	12	0.20	[.008]	04169	9-192041-8	OBSOLETE
A	[.024]	[.23]	-- 5.00	[.197]	3-2	19	12	0.15	[.006]	04037	9-192041-7	OBSOLETE
A	[.024]	[.23]	-- 5.00	[.197]	UNPL	19	12	0.15	[.006]	04038	9-192041-6	OBSOLETE
										04036	9-192041-5	OBSOLETE
A	[.024]	[.21]	-- 4.75	[.187]	3-2	18	12	0.15	[.006]	04035	9-192041-4	
A	[.030]	[.21]	-- 4.39	[.173]	4-2	17	12	0.20	[.008]	04031	9-192041-3	
A	[.030]	[.21]	-- 4.39	[.173]	UNPL	17	12	0.20	[.008]	04080	9-192041-2	OBSOLETE
A	[.034]	[.21]	-- 4.39	[.173]	8-2	17	12	0.15	[.006]	04191	9-192041-1	
A	[.034]	[.21]	-- 4.39	[.173]	UNPL	17	12	0.15	[.006]	04190	9-192041-0	
A	[.026]	[.21]	-- 4.39	[.173]	3-2	17	12	0.15	[.006]	04030	8-192041-9	
A	[.026]	[.21]	-- 4.39	[.173]	1-2	17	12	0.15	[.006]	04157	8-192041-8	
A	[.026]	[.21]	-- 4.39	[.173]	UNPL	17	12	0.15	[.006]	04073	8-192041-7	OBSOLETE
A	[.016]	[.25]	-- 4.39	[.173]	UNPL	17	13	0.12	[.005]	04064	8-192041-6	
A	[.032]	[.20]	-- 4.00	[.157]	5-2	15	12	0.20	[.008]	04126	8-192041-5	
A	[.032]	[.20]	-- 4.00	[.157]	3-2	15	12	0.20	[.008]	04028	8-192041-4	OBSOLETE
A	[.032]	[.20]	-- 4.00	[.157]	1-2	15	12	0.20	[.008]	04192	8-192041-3	
A	[.032]	[.20]	-- 4.00	[.157]	UNPL	15	12	0.20	[.008]	04117	8-192041-2	OBSOLETE
A	[.032]	[.19]	-- 4.00	[.157]	6	15	12	0.15	[.006]	04129	8-192041-1	
A	[.032]	[.19]	-- 4.00	[.157]	5-2	15	12	0.15	[.006]	04111	8-192041-0	
SUPERSEDED BY 193807-1												
A	[.032]	[.19]	-- 4.00	[.157]	3-2	15	12	0.15	[.006]	04103	7-192041-9	OBSOLETE
A	[.032]	[.19]	-- 4.00	[.157]	1-2	15	12	0.15	[.006]	04027	7-192041-8	
A	[.032]	[.19]	-- 4.00	[.157]	10	15	12	0.15	[.006]	04140	7-192041-7	OBSOLETE
A	[.032]	[.19]	-- 4.00	[.157]	UNPL	15	12	0.15	[.006]	04112	7-192041-6	OBSOLETE
A	[.032]	[.19]	-- 4.00	[.157]	UNPL	15	12	0.15	[.006]	04104	7-192041-5	
A	[.026]	[.21]	-- 4.00	[.157]	7-2	15	12	0.15	[.006]	04104	7-192041-5	OBSOLETE
A	[.026]	[.21]	-- 4.00	[.157]	7-2	15	12	0.15	[.006]	04198	7-192041-4	
SUPERSEDED BY 7-192043-6												
A	[.026]	[.21]	-- 4.00	[.157]	UNPL	15	12	0.15	[.006]	04165	7-192041-3	OBSOLETE
A	[.016]	[.21]	-- 4.00	[.157]	UNPL	15	13	0.12	[.005]	04163	7-192041-2	
A	[.016]	[.21]	-- 4.00	[.157]	UNPL	15	13	0.12	[.005]	04102	7-192041-1	
										04025	7-192041-0	OBSOLETE
A	[.028]	[.17]	-- 3.17	[.125]	3-2	13	12	0.15	[.006]	04024	6-192041-9	
A	[.028]	[.17]	-- 3.17	[.125]	1-2	13	12	0.15	[.006]	04118	6-192041-8	OBSOLETE
A	[.028]	[.17]	-- 3.17	[.125]	UNPL	13	12	0.15	[.006]	04078	6-192041-7	OBSOLETE
A	[.028]	[.18]	-- 3.17	[.125]	UNPL	13	13	0.12	[.005]	04123	6-192041-6	OBSOLETE
A	[.022]	[.16]	-- 3.17	[.125]	3-2	13	12	0.12	[.005]	04023	6-192041-5	OBSOLETE
A	[.022]	[.16]	-- 3.17	[.125]	6	13	12	0.12	[.005]	04138	6-192041-4	
A	[.022]	[.16]	-- 3.17	[.125]	10	13	12	0.12	[.005]	04138	6-192041-4	
A	[.022]	[.16]	-- 3.17	[.125]	UNPL	13	12	0.12	[.005]	04139	6-192041-3	
A	[.022]	[.16]	-- 3.17	[.125]	UNPL	13	12	0.12	[.005]	04125	6-192041-2	OBSOLETE
A	[.026]	[.15]	-- 3.00	[.118]	3-2	12	12	0.15	[.006]	04020	6-192041-1	
A	[.026]	[.15]	-- 3.00	[.118]	UNPL	12	12	0.15	[.006]	04020	6-192041-1	
A	[.026]	[.15]	-- 3.00	[.118]	UNPL	12	12	0.15	[.006]	04019	6-192041-0	OBSOLETE
A	[.026]	[.14]	-- 2.54	[.100]	3-2	11	12	0.15	[.006]	04017	5-192041-9	OBSOLETE
A	[.026]	[.14]	-- 2.54	[.100]	1-2	11	12	0.15	[.006]	04017	5-192041-9	OBSOLETE
A	[.026]	[.14]	-- 2.54	[.100]	10	11	12	0.15	[.006]	04110	5-192041-8	OBSOLETE
A	[.026]	[.14]	-- 2.54	[.100]	10	11	12	0.15	[.006]	04113	5-192041-7	OBSOLETE
A	[.026]	[.14]	-- 2.54	[.100]	UNPL	11	12	0.15	[.006]	04060	5-192041-6	
A	[.016]	[.16]	-- 2.36	[.093]	3-2	11	13	0.12	[.005]	04188	5-192041-5	OBSOLETE
A	[.016]	[.16]	-- 2.36	[.093]	6	11	13	0.12	[.005]	04144	5-192041-4	
A	[.016]	[.16]	-- 2.36	[.093]	UNPL	11	13	0.12	[.005]	04097	5-192041-3	
A	[.022]	[.14]	-- 2.36	[.093]	5-2	11	12	0.12	[.005]	04145	5-192041-2	
A	[.022]	[.14]	-- 2.36	[.093]	4-9	11	12	0.12	[.005]	04180	5-192041-1	

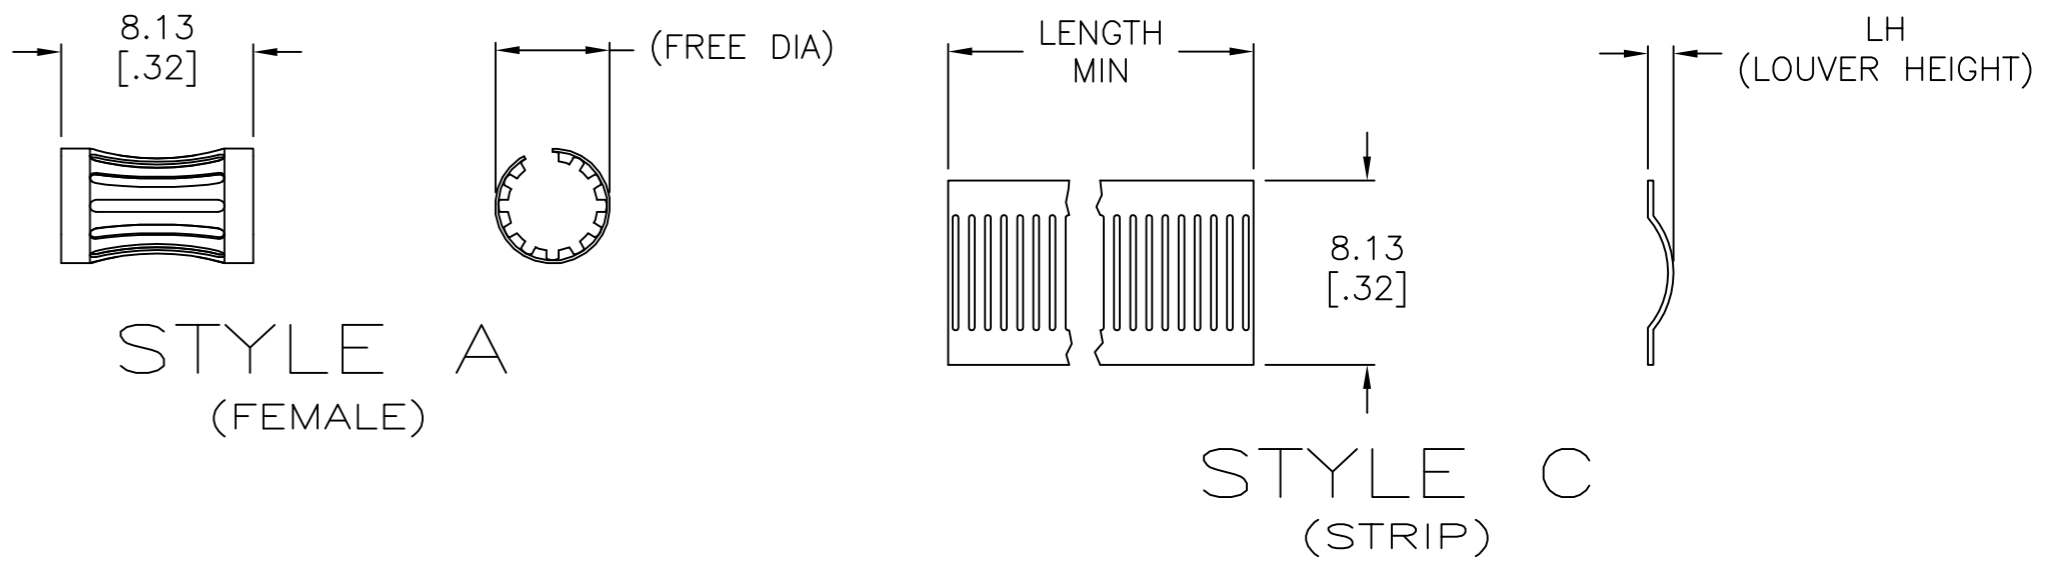

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN -	TE Connectivity	
DIMENSIONS: mm		CHK J.TURNER 07-21-93	NAME CONTACT BAND,FEMALE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	DRAWING NO C=192041	
0 PLC ± -		PRODUCT SPEC -	RESTRICTED TO -	
1 PLC ± -		APPLICATION SPEC -	SCALE 1:1	SHEET 2 of 2
2 PLC ± 0.5 [.02]		WEIGHT -	REV M	
3 PLC ± 0.25 [.010]		CUSTOMER DRAWING		
4 PLC ± -				
ANGLES ± -				
FINISH SEE TABLE				

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)