


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
H	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		ECR-15-010046	13JUL15	SW	RZ

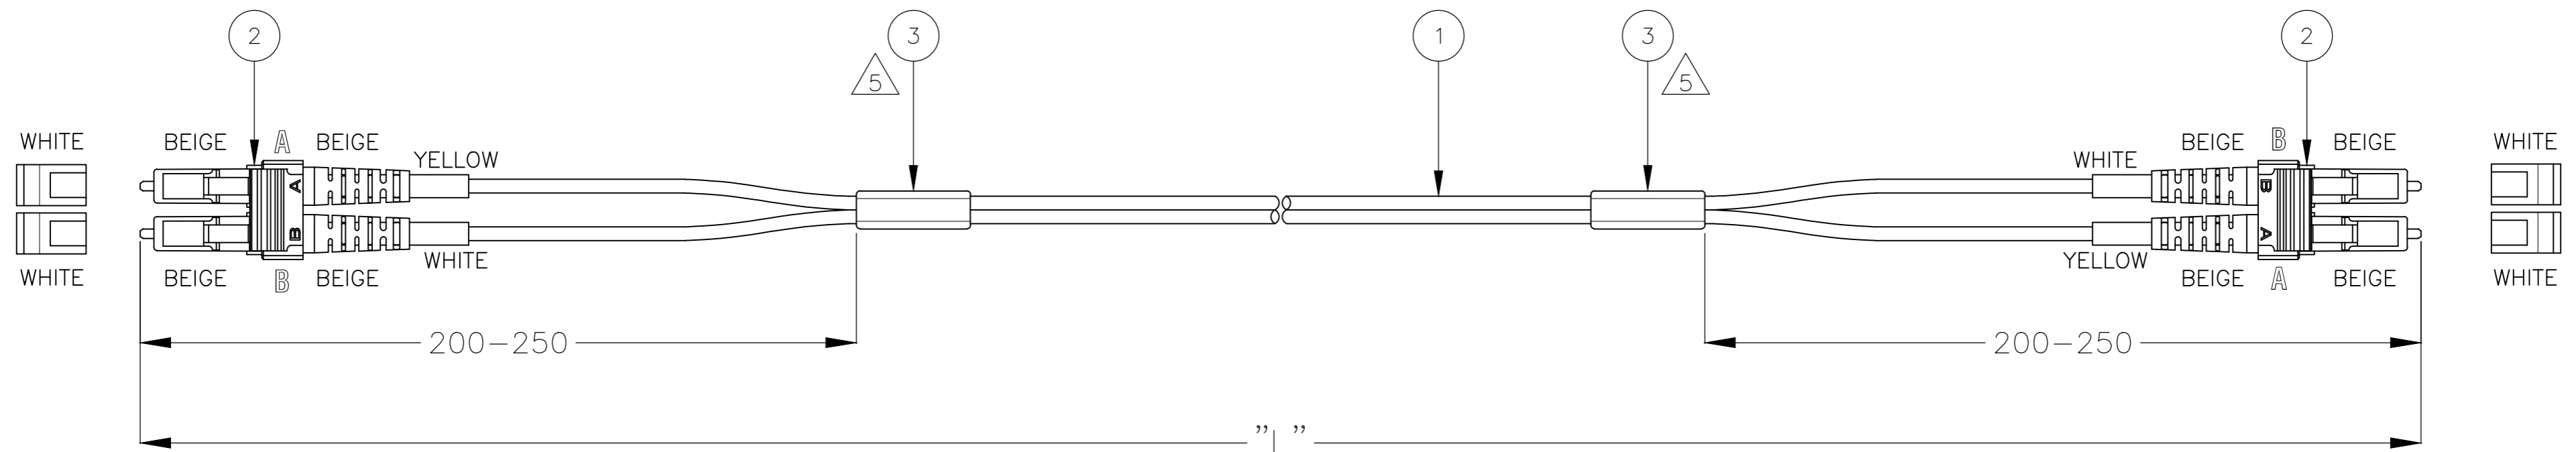

ASSEMBLY CONNECTIVITY	
LC CONN.	LC CONN.
YELLOW (A)	WHITE (B)
WHITE (B)	YELLOW (A)

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (meter)
X-2061529-Y	XY.0

NOTES:

- 1 ATTENUATION  $\leq 0.3$  dB, MEASURED AT 850 nm ACCORDING TO I.E.C. 61300-3-4 INSERTION METHOD B
- 2 RETURN LOSS  $\geq 20$  dB, IN MATED CONDITION AGAINST REFERENCE CONNECTOR AT 850 nm
- 3 FILLED OUT TEST RESULT SHEET SUPPLIED WITH EACH INDIVIDUALLY PACKED ASSEMBLY
- 4 CABLE INFORMATION:
  - CORE DIAMETER: 50/125  $\mu\text{m}$  (2x)
  - OUTER JACKET DIAMETER: 1.8 x 3.6 mm
  - OUTER JACKET COLOUR: ORANGE
  - OUTER JACKET MATERIAL: LSZH
- 5 BLANK LABEL  
ONLY ONE LABEL IN THE MIDDLE OF THE CABLE IS USED FOR LENGTHS < 0.6 METER

2	BLANK LABEL	3
2	LC DUPLEX CONNECTOR, ULTRA SHORT, MULTI MODE, BEIGE	2
L	FOCAB 1.8MZ 50/125, ORANGE, LSZH	1
Qty	Description	Item

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COOLEN 13APR2011	<b>TE</b> TE Connectivity	
DIMENSIONS: mm		CHK R. GROENEVELD 01JUN2011		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. HENGELMOLEN 01JUN2011	NAME FIBER OPTIC LEAD 1.8MZ LC/DPX - LC/DPX ULTRA SHORT MULTI MODE 50/125	
0 PLC $\pm 1.0$ 1 PLC $\pm 0.5$ 2 PLC $\pm -$ 3 PLC $\pm -$ 4 PLC $\pm -$ ANGLES $\pm -$		PRODUCT SPEC -	SIZE A2	
MATERIAL -		FINISH -	CAGE CODE 00779	DRAWING NO C=2061529
		WEIGHT -	RESTRICTED TO -	
		CUSTOMER DRAWING	SCALE NTS	SHEET 1 of 1

2061529

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)