
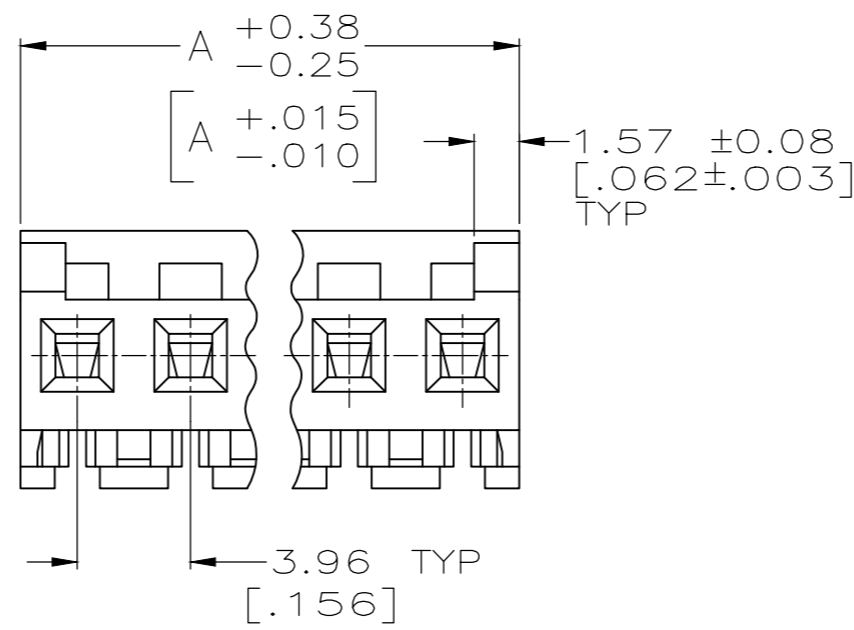
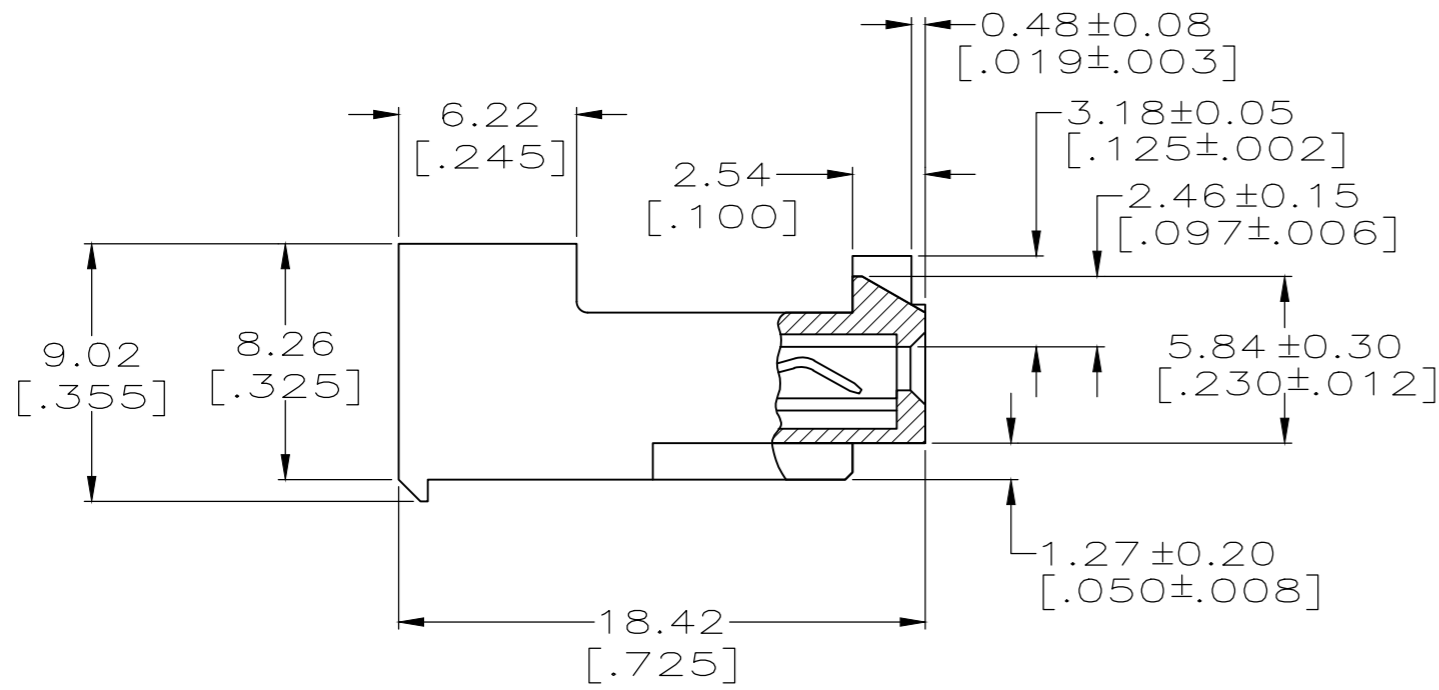


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00				
N		REVISED PER ECR-20-000814	26MAY2020	PC	SW

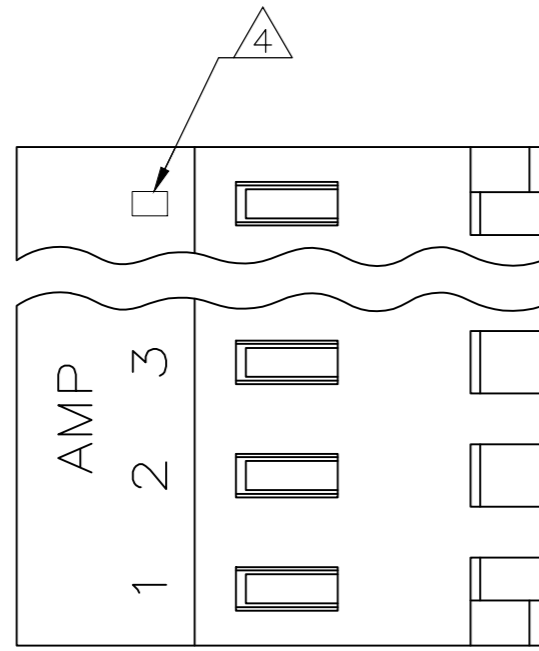

1 MATERIAL: CONNECTOR - NYLON UL94V-2 (ORANGE).  
 CONTACTS - 0.00076[.000030] GOLD THK OR 0.00008[.000003] MIN THK GOLD FLASH OVER 0.00068[.000027] THK PALLADIUM NICKEL, PER TE CONNECTIVITY'S DISCRETION. IN CONTACT AREA WITH MATTE TIN FOR -2 THRU -28, MATTE WHISKER MITIGATED TIN FOR 3-644460-2 THRU 4-644460-8 OVER NICKEL UNDERPLATE.

2 CONTACTS ACCEPT 18 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.

3 CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] POST AND REMAIN LOCKED IN POSITION.

4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.

5 DIMENSIONS IN BRACKETS ARE IN INCHES.

6 HOUSING FEATURES ARE: CLOSED END WITH LOCKING RAMP AND POLARIZING TAB.

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

NO	DESCRIPTION	DATE	REV	BY
NO	71.32[2.808]	18	4-644460-8	
NO	67.36[2.652]	17	4-644460-7	
NO	63.40[2.496]	16	4-644460-6	
NO	59.44[2.340]	15	4-644460-5	
NO	55.47[2.184]	14	4-644460-4	
NO	51.51[2.028]	13	4-644460-3	
NO	47.55[1.872]	12	4-644460-2	
NO	43.59[1.716]	11	4-644460-1	
NO	39.62[1.560]	10	4-644460-0	
NO	35.66[1.404]	9	3-644460-9	
NO	31.70[1.248]	8	3-644460-8	
NO	27.74[1.092]	7	3-644460-7	
NO	23.77[.936]	6	3-644460-6	
NO	19.81[.780]	5	3-644460-5	
NO	15.85[.624]	4	3-644460-4	
NO	11.89[.468]	3	3-644460-3	
NO	7.92[.312]	2	3-644460-2	

OBSOLETE	NO	71.32[2.808]	18	1-644460-8
7	SUPERSEDED BY	4-644460-6	NO	63.40[2.496]
OBSOLETE	NO	59.44[2.340]	15	1-644460-5

OBSOLETE	NO	47.55[1.872]	12	1-644460-2
	NO	43.59[1.716]	11	1-644460-1
	NO	39.62[1.560]	10	1-644460-0
	NO	35.66[1.404]	9	644460-9
	NO	31.70[1.248]	8	644460-8
	NO	27.74[1.092]	7	644460-7
	NO	23.77[.936]	6	644460-6
	NO	19.81[.780]	5	644460-5
	NO	15.85[.624]	4	644460-4
	NO	11.89[.468]	3	644460-3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	15MAR2004	 TE Connectivity MTA-156 CONNECTOR ASSEMBLY, 18 AWG, STANDARD	
DIMENSIONS: mm [INCHES]		CHK	15-MAR-04		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	15-MAR-04		
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± 0°30'		NAME			
MATERIAL		PRODUCT SPEC		SIZE	
FINISH		APPLICATION SPEC		CAGE CODE	
1		108-1051		DRAWING NO	
1		114-1020		RESTRICTED TO	
		WEIGHT		SCALE	
		-		4:1	
		CUSTOMER DRAWING		SHEET	
				1 OF 1	
				REV	
				N	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)