
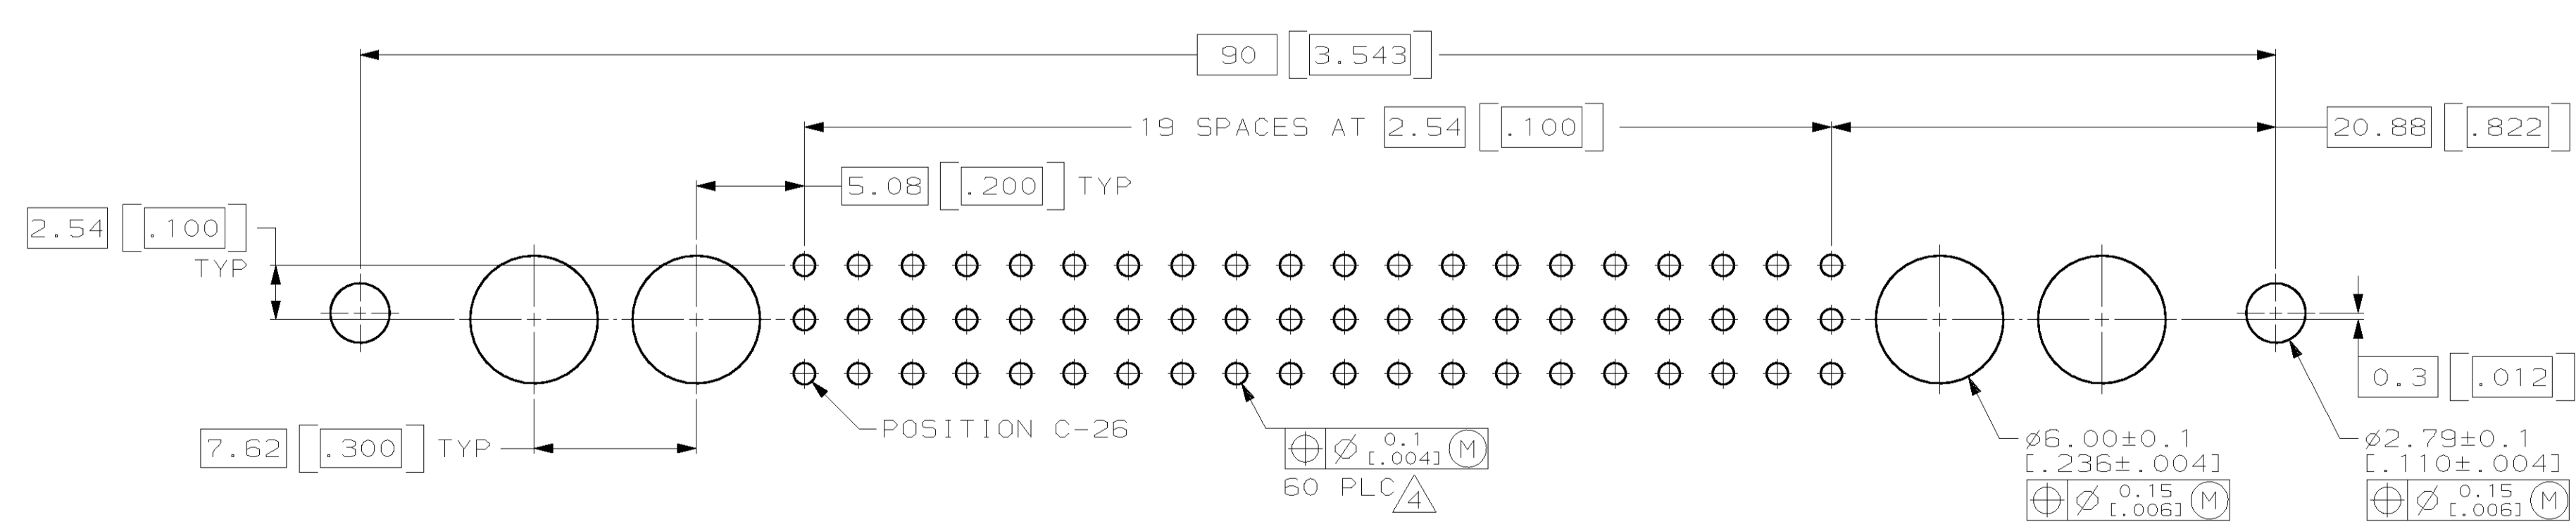
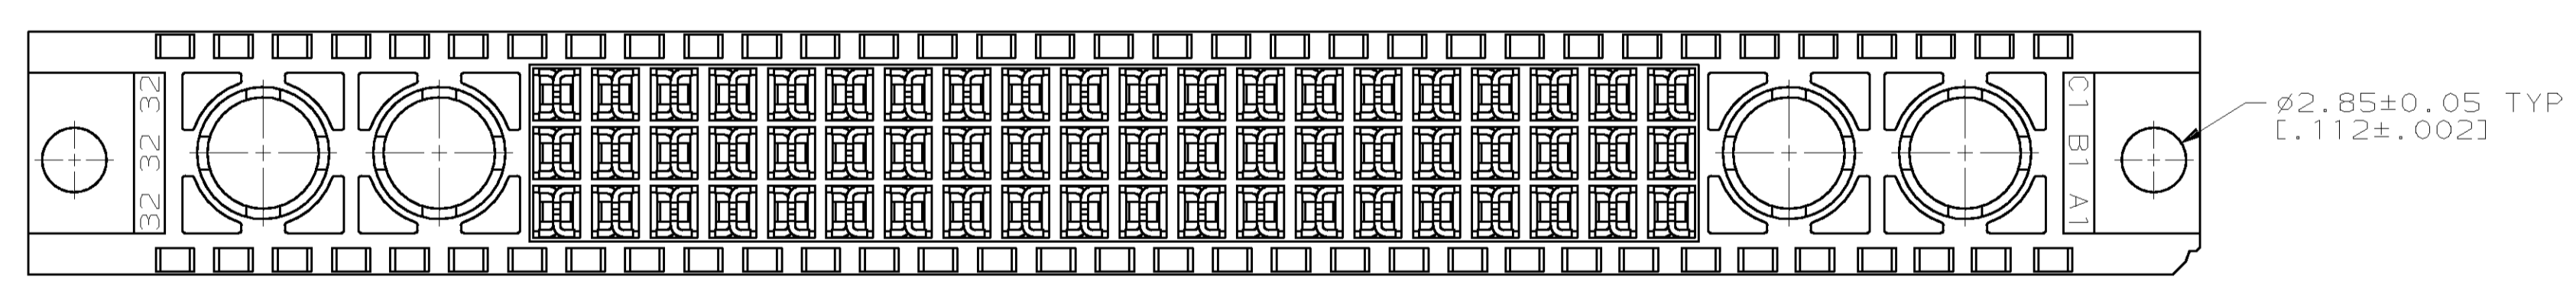
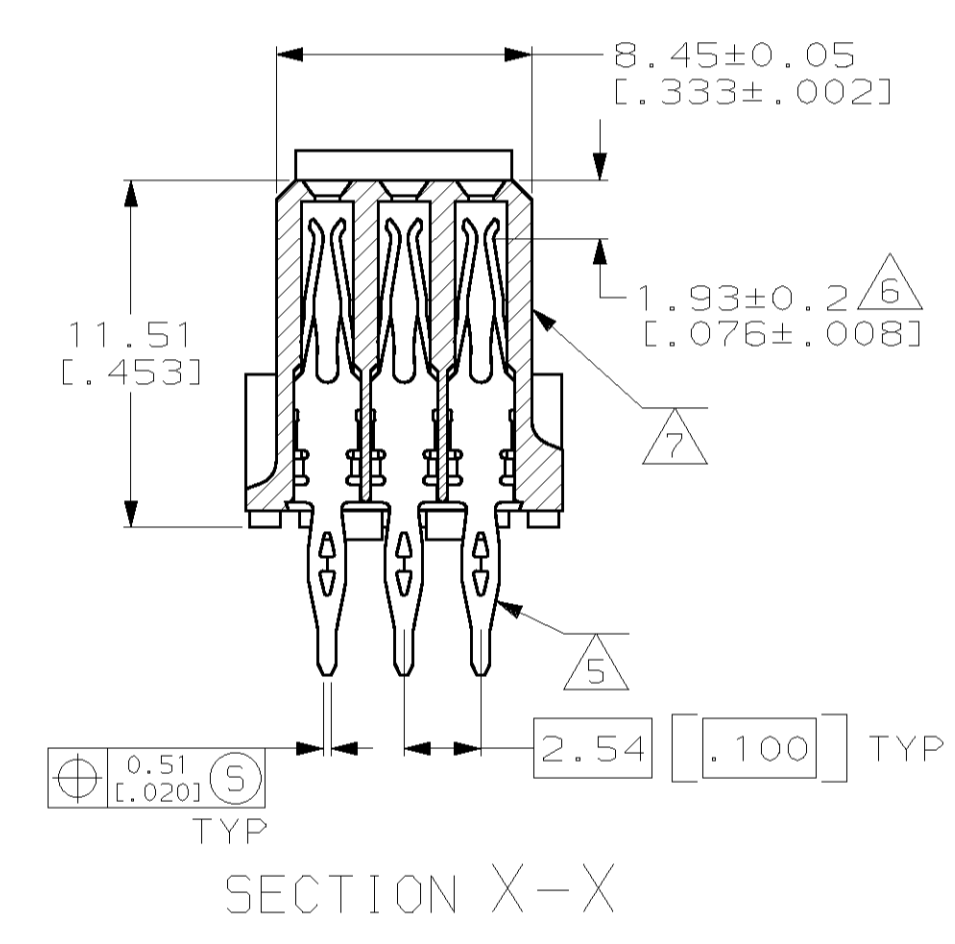
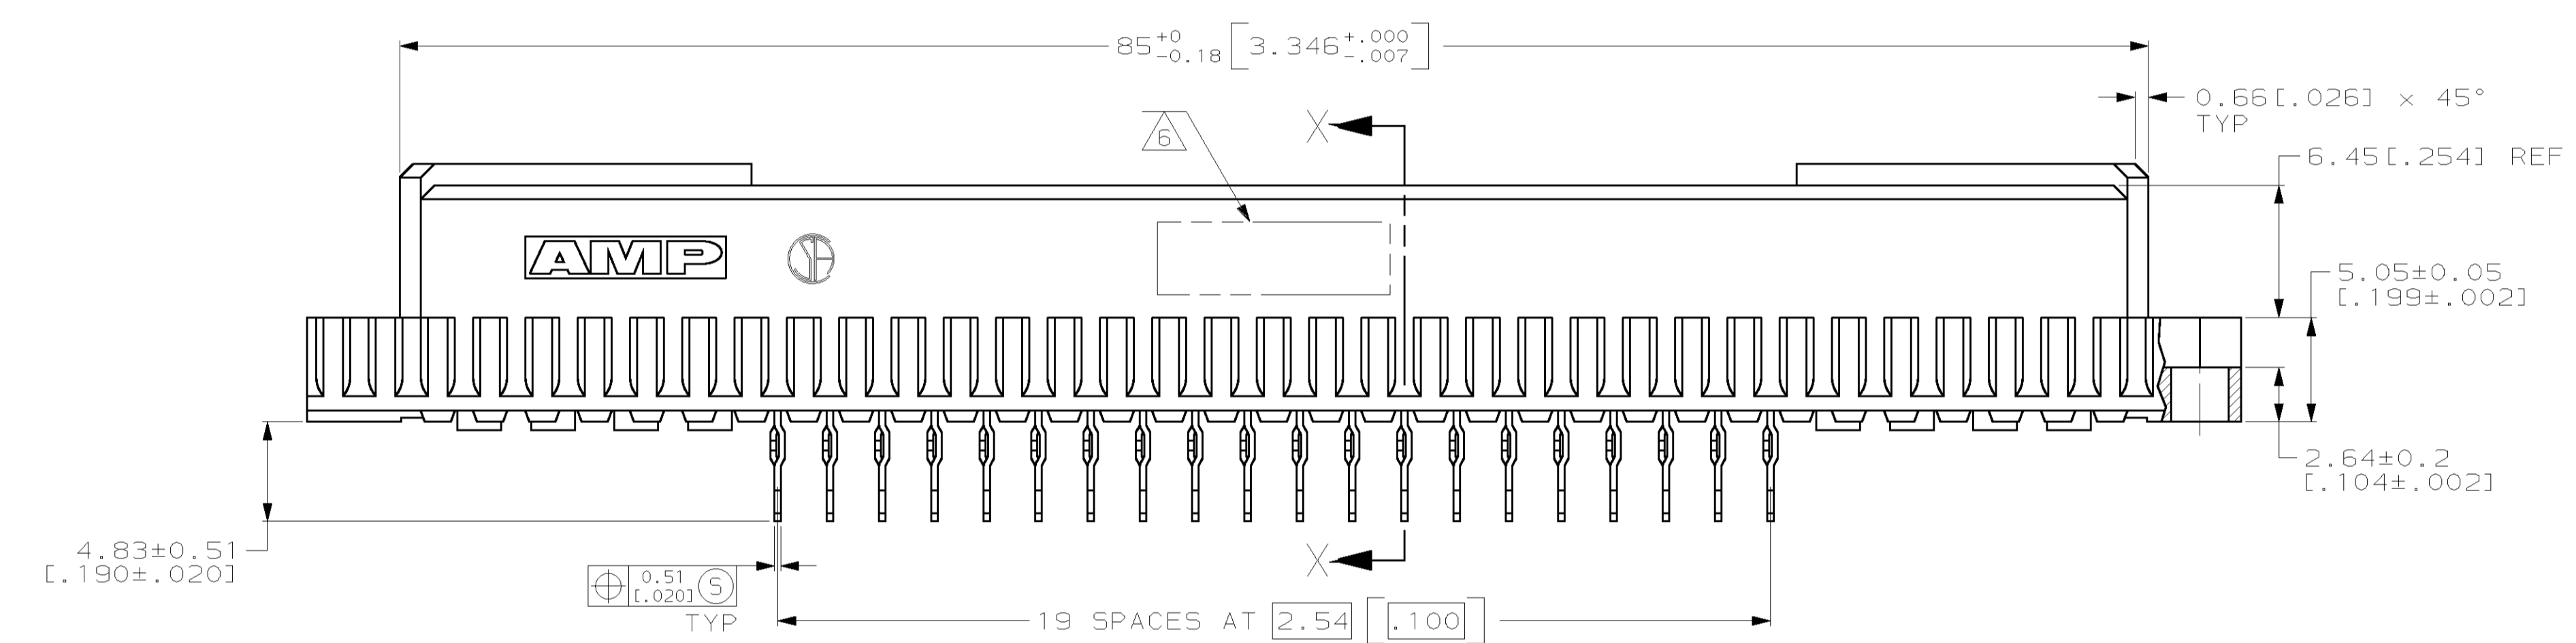


REVISONS		DATE	BY	APPV
0	DRAWN	-	-	-
A	REV PER EC 0G21-80-99	06 APR 99	BC	CR
B	REV PER EC 0U1B-0367-00	04 JAN 01	BC	CR

- ① HOUSING MATERIAL: GLASS-FILLED POLYESTER. COLOR: GRAY.
- ② CONTACT MATERIAL: PHOSPHOR BRONZE.
- ③ PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO IN THIS APPROXIMATE AREA.
- ④ ACTION PIN POSTS REQUIRE 1.57[.062] MINIMUM THICK PC BOARD. RECOMMENDED PC BOARD DRILLED HOLES ARE $\phi 1.151 \pm 0.025$ [.0453 \pm .0010] WITH 0.02-0.08 [.001-.003] COPPER AND 0.008 [.0003] MINIMUM TIN-LEAD PLATING. FINISHED HOLES AFTER PLATING $\phi 0.94-1.09$ [.037-.043].
- ⑤ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN-LEAD PLATE ON POSTS.
- ⑥ CONTACT POINT.
- ⑦ HOT STAMPING ON THIS SIDE.

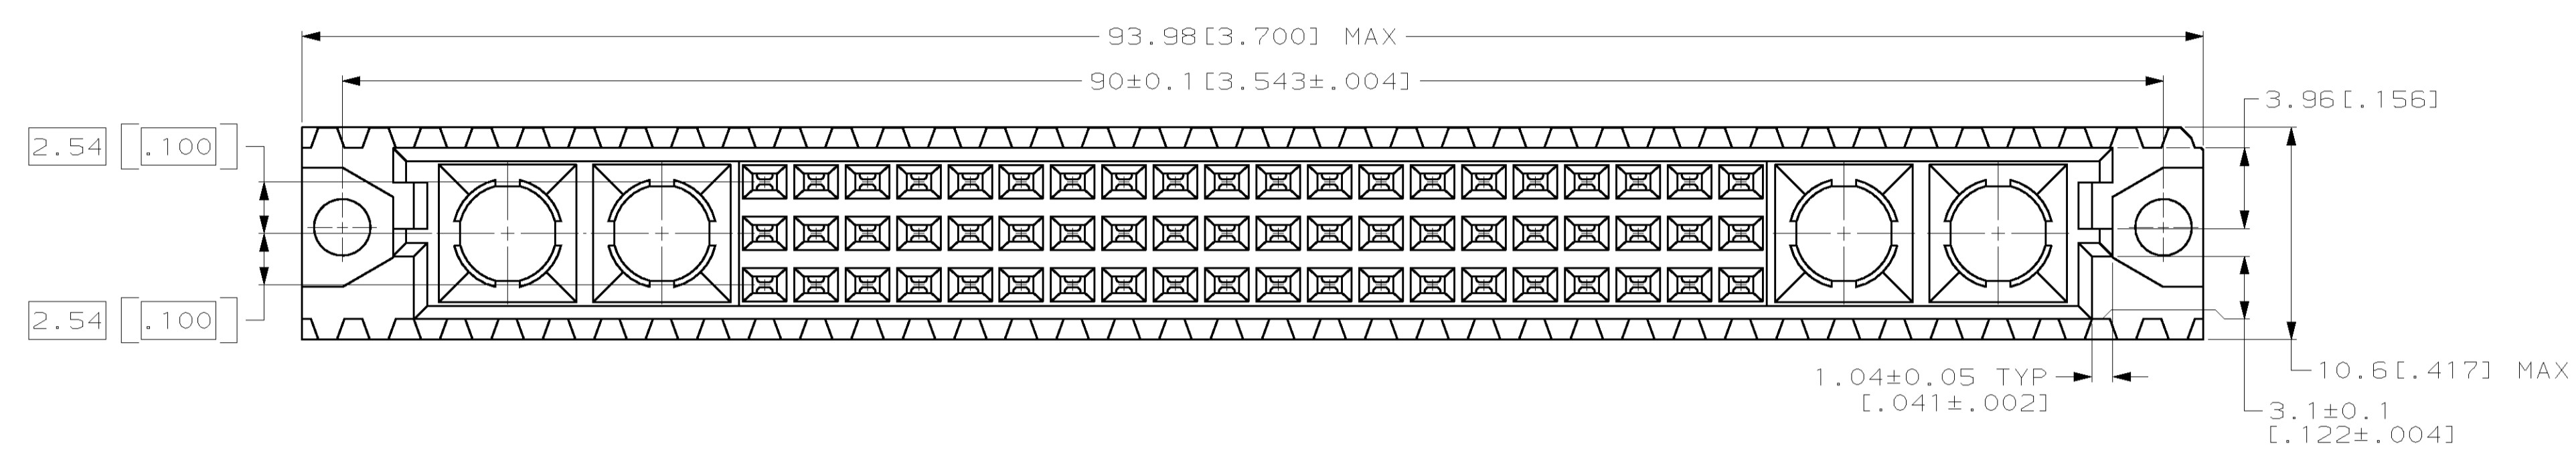

148420-5
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. BRINER 9/30/97	AMP Incorporated Harrisburg, PA 17105-3608
DIMENSIONS: mm (INCHES)		CHK R. PATTERSON 9/30/97	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPV R. PATTERSON 9/30/97	NAME RECEPTACLE ASSEMBLY, EUROCARD, TYPE M, 60 + 4 POSITION
0 PLC \pm		PRODUCT SPEC	
1 PLC \pm		APPLICATION SPEC	SIZE A1
2 PLC ± 0.13 (.005)		WEIGHT	CAGE CODE 148420
3 PLC \pm		CUSTOMER DRAWING	SCALE 4:1
4 PLC \pm			SHEET 1 OF 1
ANGLES			REV B

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)