

# SPECIFICATION CONTROL DRAWING


**55PC1116**

TITLE ONE CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLT

Date 1-15-93

Revision A

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

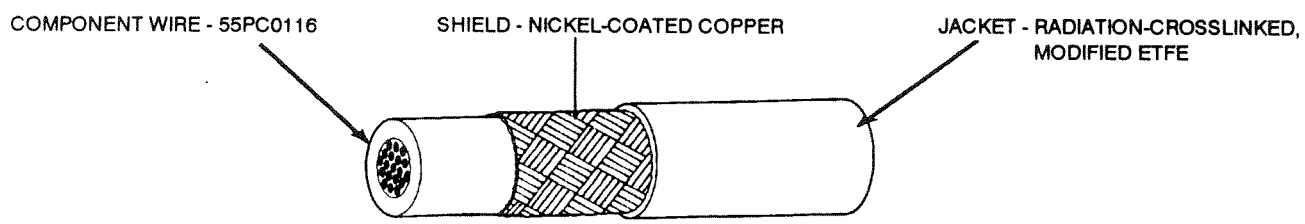

### CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC1116-26-*	26	38	.0050	.0060	.056	.060	.064	4.00	4.24
55PC1116-24-*	24	38	.0050	.0060	.061	.065	.069	4.86	5.12
55PC1116-22-*	22	38	.0050	.0060	.068	.071	.074	6.13	6.41
55PC1116-20-*	20	38	.0050	.0060	.075	.079	.083	8.07	8.37
55PC1116-18-*	18	38	.0050	.0060	.085	.088	.092	10.82	11.22
55PC1116-16-*	16	38	.0050	.0060	.092	.096	.100	13.03	13.46

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms)  
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz  
 CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour  
 JACKET COLOR: White preferred  
 JACKET ELONGATION AND TENSILE STRENGTH:  
 Elongation, 50% (minimum)  
 Tensile Strength, 5000 lbf/in<sup>2</sup> (minimum)  
 JACKET FLAWS:  
 Spark Test, 1000 volts (rms), 60 Hz, 100% test  
 Impulse Dielectric Test, 6.0 kV (peak), 100 % test

SHIELD COVERAGE: 85% (minimum)  
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):  
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:  
 The \*\*\* in the part numbers above shall be replaced by a color code designator with a dash separating the component wire color from the jacket color.  
 Example: AWG 22, white component wire;  
 white jacket: 55PC1116-22-9-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HERIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF SUBMITTATION FOR BID.

## Raychem

Raychem Corporation  
 300 Constitution Drive, Menlo Park, California 94025  
 (415) 361 3333 TWX 910 373 1728

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)