

SPECIFICATION CONTROL DRAWING

55PC0726


TITLE TWO CONDUCTOR CABLE, UNSHIELDED, UNJACKETED, 1000 VOLT

Date 12-9-96

Revision B

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

COMPONENT WIRES - 55PC0716

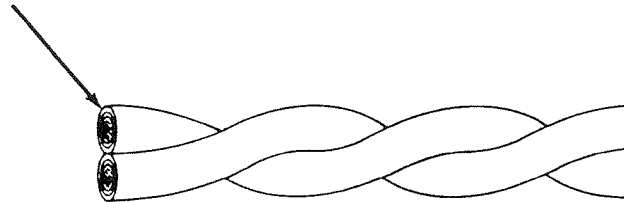

CONSTRUCTION DETAILS						
PART NUMBER	CONDUCTOR SIZE (AWG)	DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
		LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC0726-24-*	24	.107	.111	.115	5.81	6.13
55PC0726-22-*	22	.119	.123	.127	7.87	8.26
55PC0726-20-*	20	.135	.139	.143	11.11	11.55
55PC0726-18-*	18	.155	.159	.163	16.05	16.70
55PC0726-16-*	16	.170	.174	.178	19.92	20.61

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 1000 volts (rms)
 INSULATION FLAWS:
 Impulse Dielectric test, 8.0 kV (peak)

PART NUMBER:
 The "*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors.
 Example: AWG 22, white and black component wires;
 55PC0726-22-9/0

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HERIN: REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem

Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 1-800-2 Raychem Fax: 1-415-361-629

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)