

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00				
	K2	REVISED PER ECO-11-004820	11MAR11	RK	HMR

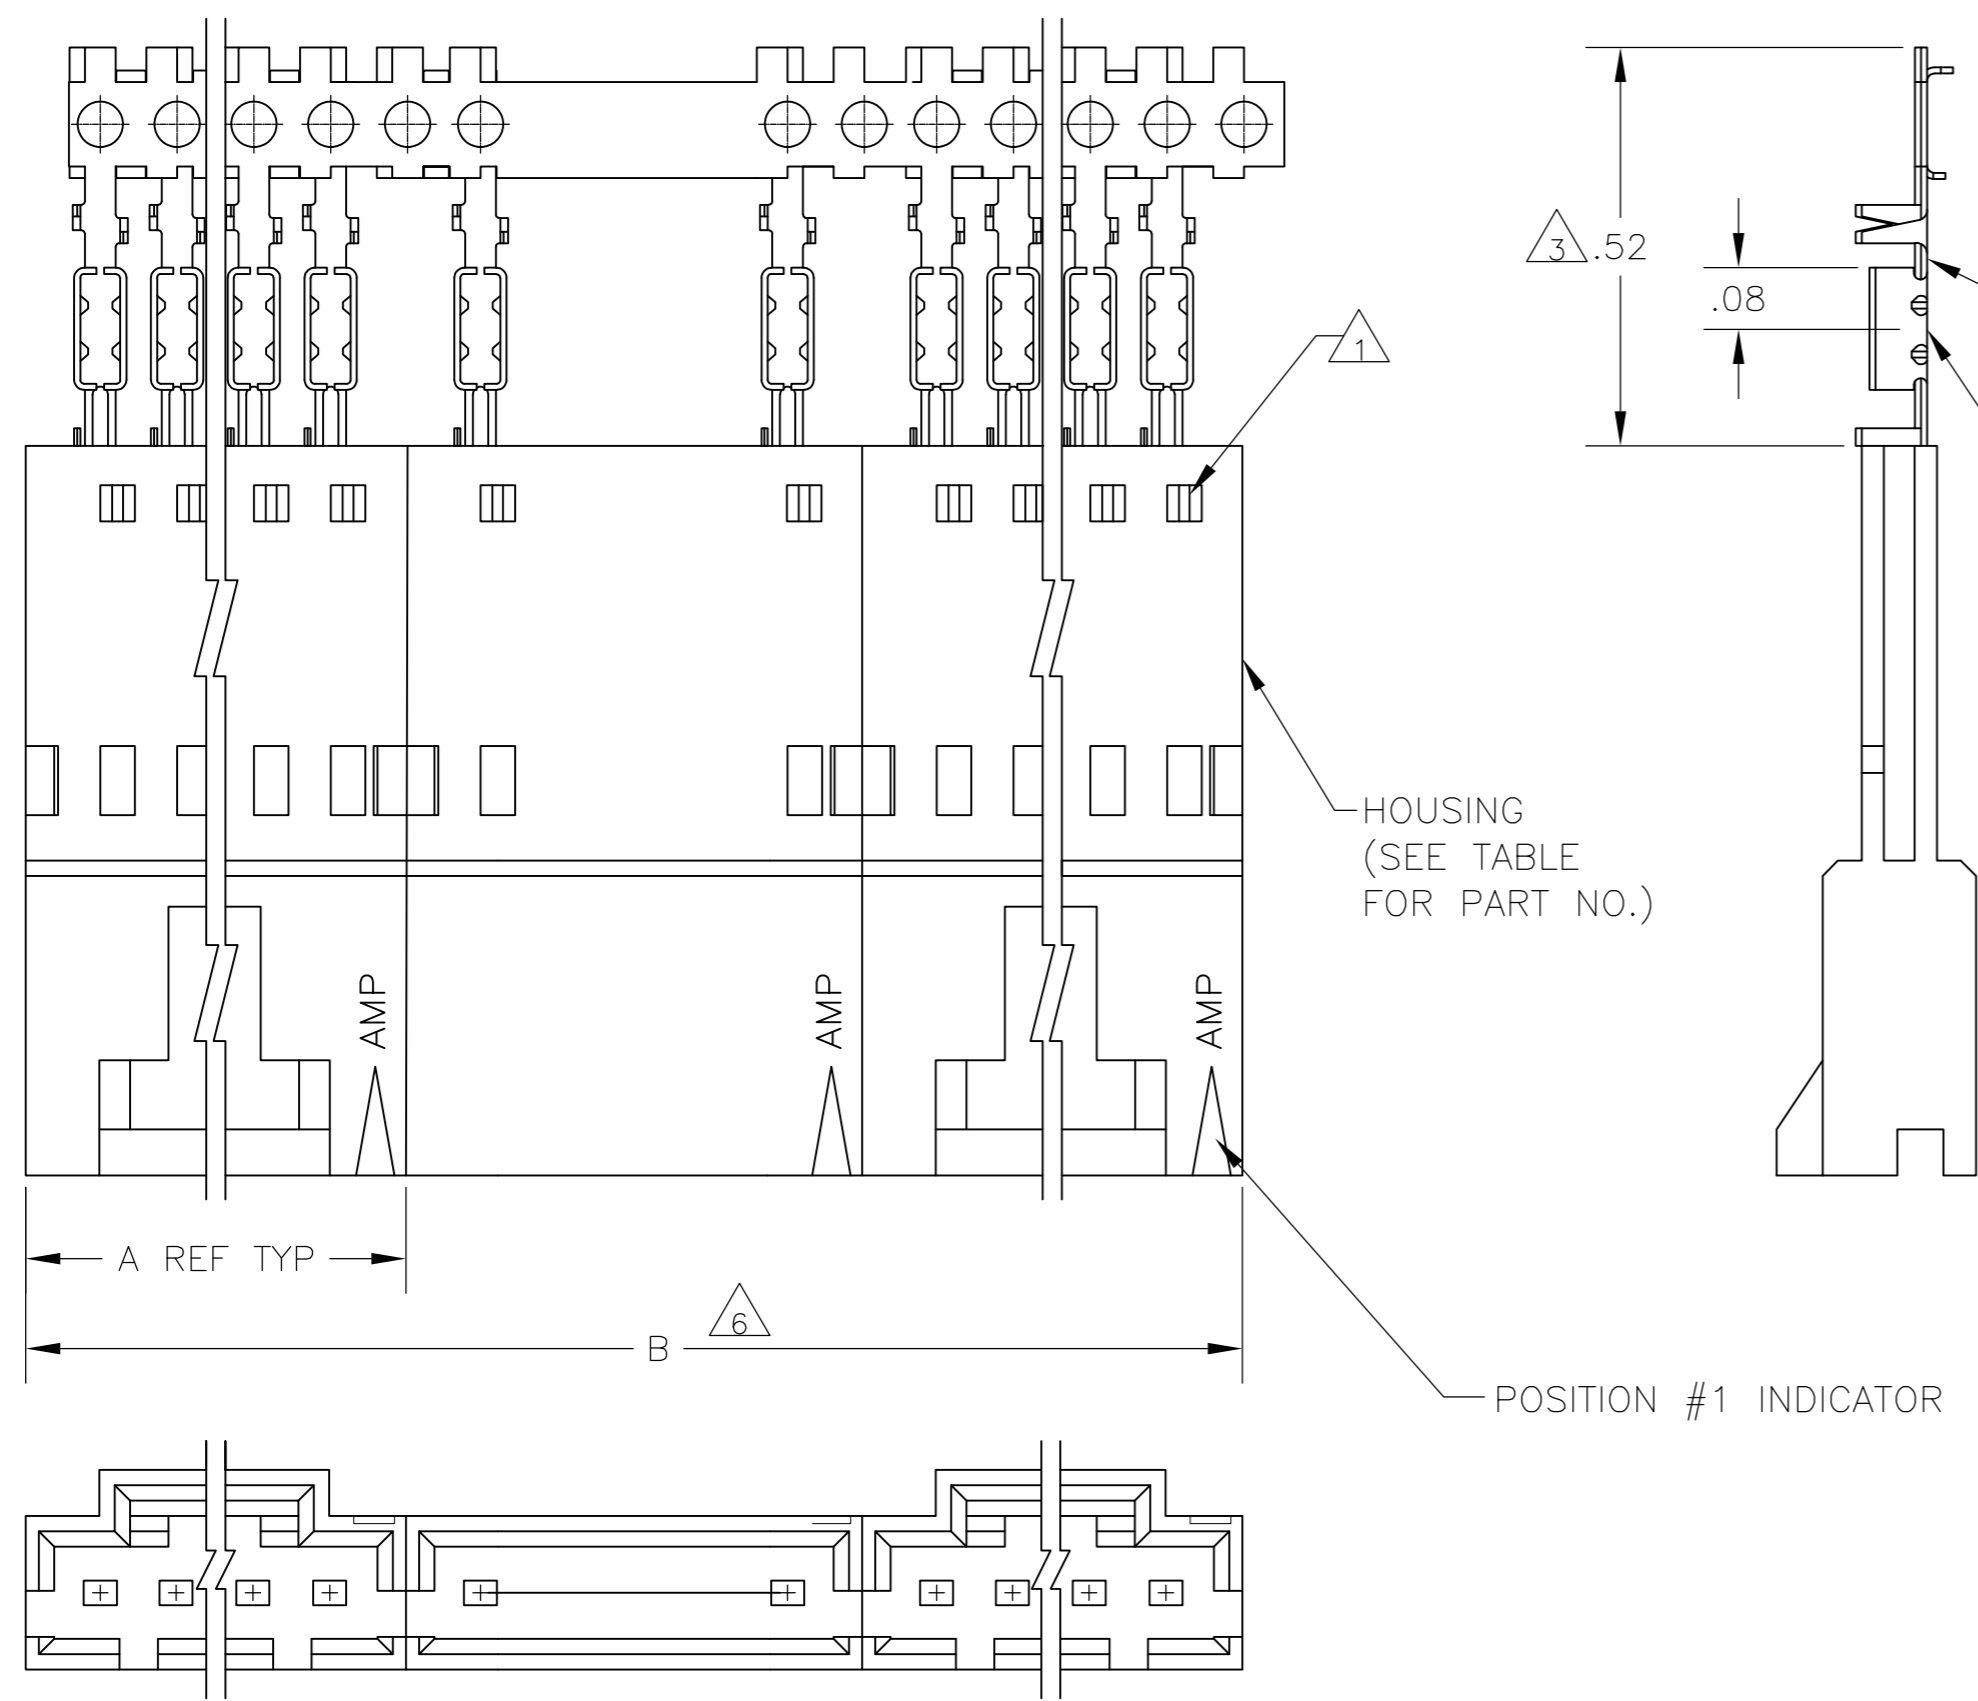

12	OBSOLETE	11	2	2.59	1.295	1-103653-1	12	6-103944-1
12	OBSOLETE	11	2	2.39	1.195	1-103653-0	11	6-103944-0
		11	2	2.19	1.095	103653-9	10	5-103944-9
		11	2	1.99	.995	103653-8	9	5-103944-8
		11	2	1.79	.895	103653-7	8	5-103944-7
		11	3	2.39	.795	103653-6	7	5-103944-6
		11	2	1.39	.695	103653-5	6	5-103944-5
		11	4	2.38	.595	103653-4	5	5-103944-4
		11	4	1.98	.495	103653-3	4	5-103944-3
		11	5	1.98	.395	103653-2	3	5-103944-2
		11	8	2.36	.295	103653-1	2	5-103944-1
		10	3	2.39	.795	103653-6	7	1-103944-3
		10	4	1.98	.495	103653-3	4	1-103944-2
12	OBSOLETE	8	2	2.59	1.295	1-103653-1	12	1-103944-1
		8	2	2.39	1.195	1-103653-0	11	1-103944-0
		8	2	2.19	1.095	103653-9	10	103944-9
		8	2	1.99	.995	103653-8	9	103944-8
		8	2	1.79	.895	103653-7	8	103944-7
		8	3	2.39	.795	103653-6	7	103944-6
		8	2	1.39	.695	103653-5	6	103944-5
		8	4	2.38	.595	103653-4	5	103944-4
		8	4	1.98	.495	103653-3	4	103944-3
		8	5	1.98	.395	103653-2	3	103944-2
		8	8	2.36	.295	103653-1	2	103944-1
	PLATING	6	B	A		HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103661
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK
PINS: PHOS. BRONZE
- 8 FINISH- PINS: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
- 9 FINISH- PINS: .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 10 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 11 FINISH- PINS: .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.BROWN 26JUL00		TE Connectivity																				
DIMENSIONS: INCHES		CHK K.WRIGHT 26JUL00		NAME																				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K.WRIGHT 26JUL00		SHROUDED PIN ASSY, AMPMDO MTE, SINGLE ROW, .100 CL, POLARIZED, W/ LATCH WINDOWS, FOR NO 22-NO 26 AWG WIRE SIZE, STRIP FORM																				
<table border="1"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>-</td></tr> <tr><td>3 PLC</td><td>±</td><td>-</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> </table>		0 PLC		±	-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	-	4 PLC	±	-	ANGLES	±	-	PRODUCT SPEC 108-25034	SIZE	CAGE CODE	DRAWING NO
0 PLC	±	-																						
1 PLC	±	-																						
2 PLC	±	-																						
3 PLC	±	-																						
4 PLC	±	-																						
ANGLES	±	-																						
MATERIAL		APPLICATION SPEC 114-25026	A2	00779	C=103944																			
FINISH		WEIGHT	SCALE 4:1		SHEET 1 OF 1																			
SEE TABLE		CUSTOMER DRAWING	REV K2																					

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)