




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	E	REVISED PER ECO-10-004812		04MAY10	HMR	CR	

MATERIALS:  
 HOUSING: THERMOPLASTIC, UL94V-0, BLACK.  
 TERMINAL: BRIGHT TIN OVER COPPER ALLOY.  
 SCREWS: 8-32, ZINC PLATED STEEL.

ELECTRICAL:  
 CURRENT RATING: 30A  
 VOLTAGE RATING: 600V  
 WIRE RANGE: 10-18 AWG (UL)  
 10-22 AWG (CSA)

MECHANICAL:  
 RECOMMENDED TORQUE: 20 IN-LB.  
 OPERATING TEMP.: -40°C TO +120°C MAX.

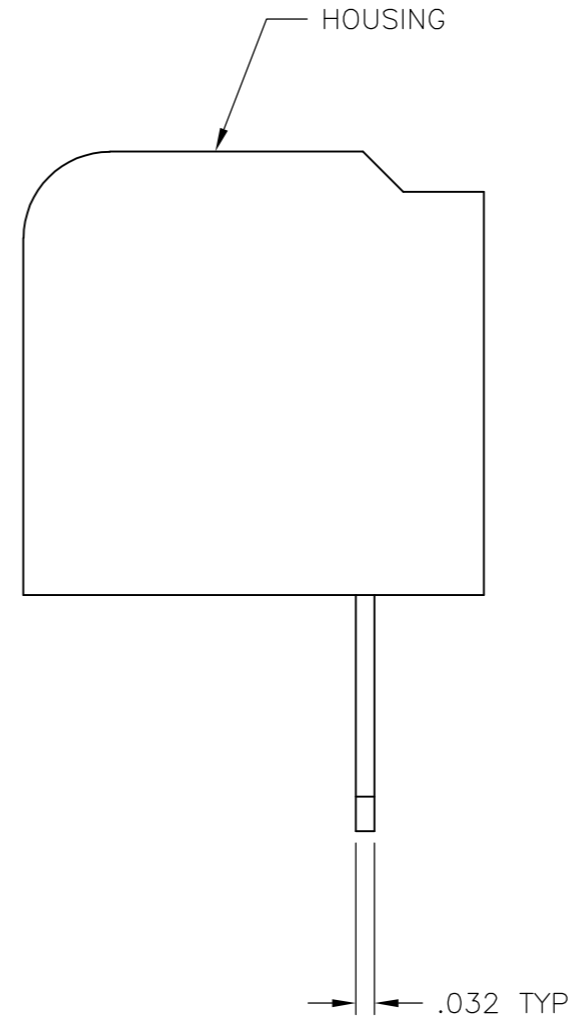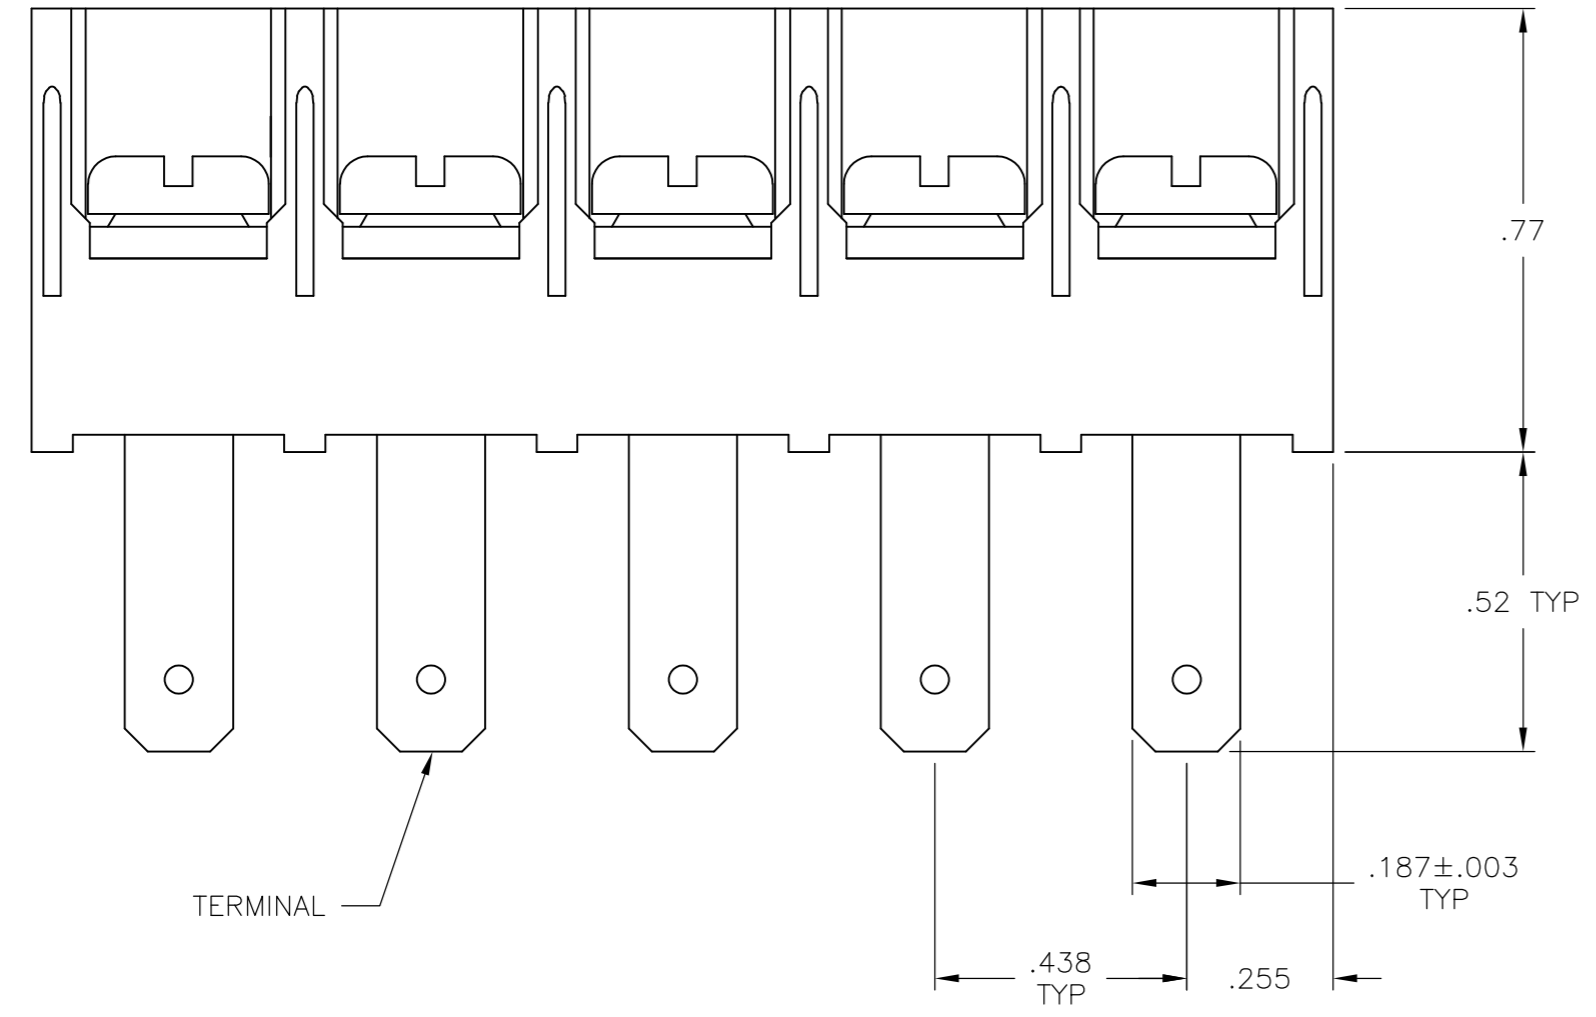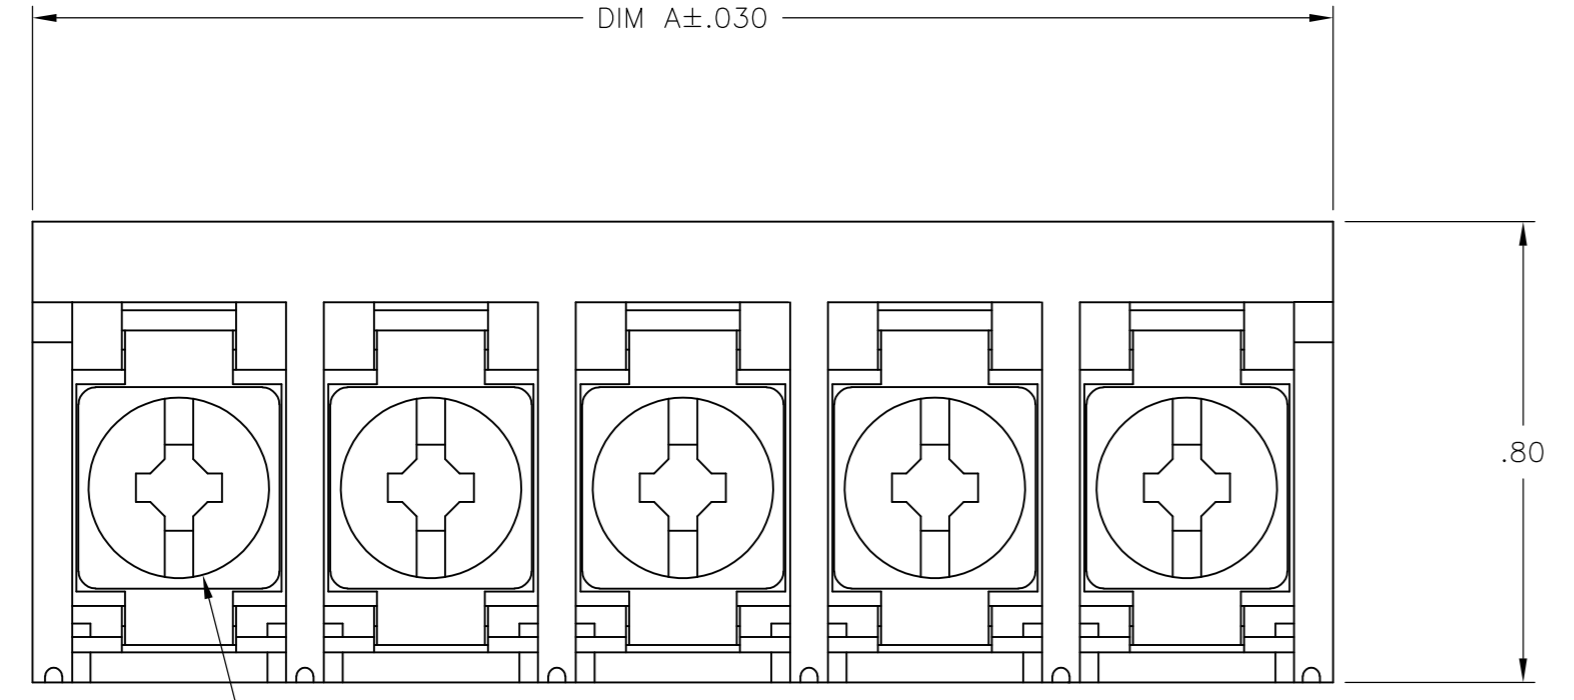

CATALOG NUMBER	DIM A	NO OF POSN	PART NUMBER
8QCV-26-008	10.937	26	2-1546296-6
8QCV-25-008	10.500	25	2-1546296-5
8QCV-24-008	10.062	24	2-1546296-4
8QCV-23-008	9.625	23	2-1546296-3
8QCV-22-008	9.187	22	2-1546296-2
8QCV-21-008	8.750	21	2-1546296-1
8QCV-20-008	8.823	20	2-1546296-0
8QCV-19-008	8.385	19	1-1546296-9
8QCV-18-008	7.948	18	1-1546296-8
8QCV-17-008	7.510	17	1-1546296-7
8QCV-16-008	7.073	16	1-1546296-6
8QCV-15-008	6.635	15	1-1546296-5
8QCV-14-008	6.198	14	1-1546296-4
8QCV-13-008	5.760	13	1-1546296-3
8QCV-12-008	5.323	12	1-1546296-2
8QCV-11-008	4.885	11	1-1546296-1
8QCV-10-008	4.448	10	1-1546296-0
8QCV-09-008	4.010	9	1546296-9
8QCV-08-008	3.573	8	1546296-8
8QCV-07-008	3.135	7	1546296-7
8QCV-06-008	2.698	6	1546296-6
8QCV-05-008	2.260	5	1546296-5
8QCV-04-008	1.823	4	1546296-4
8QCV-03-008	1.385	3	1546296-3
8QCV-02-008	.948	2	1-1437659-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 19SEP2005	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK S YODER 9/19/05	NAME ASSEMBLY, DUAL BARRIER 8QCV-XX-008	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .010 4 PLC ± - ANGLES ± - FINISH		APVD S YODER 9/19/05	RESTRICTED TO	
MATERIAL		PRODUCT SPEC	SIZE A2	CAGE CODE 00779
		APPLICATION SPEC	DRAWING NO C=1-1437659-2	SCALE 1:1
		WEIGHT	SHEET 1 of 1	REV E
		CUSTOMER DRAWING		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)