


| LOC | DIST | P | F | ZONE | LTR | REVISIONS | DATE | APPD |
|-----|------|---|---|------|-----|--------------------------|---------|------|
| G | 14 | | | | | D1 REV PER ECR 07-006018 | 20MAR07 | JR |

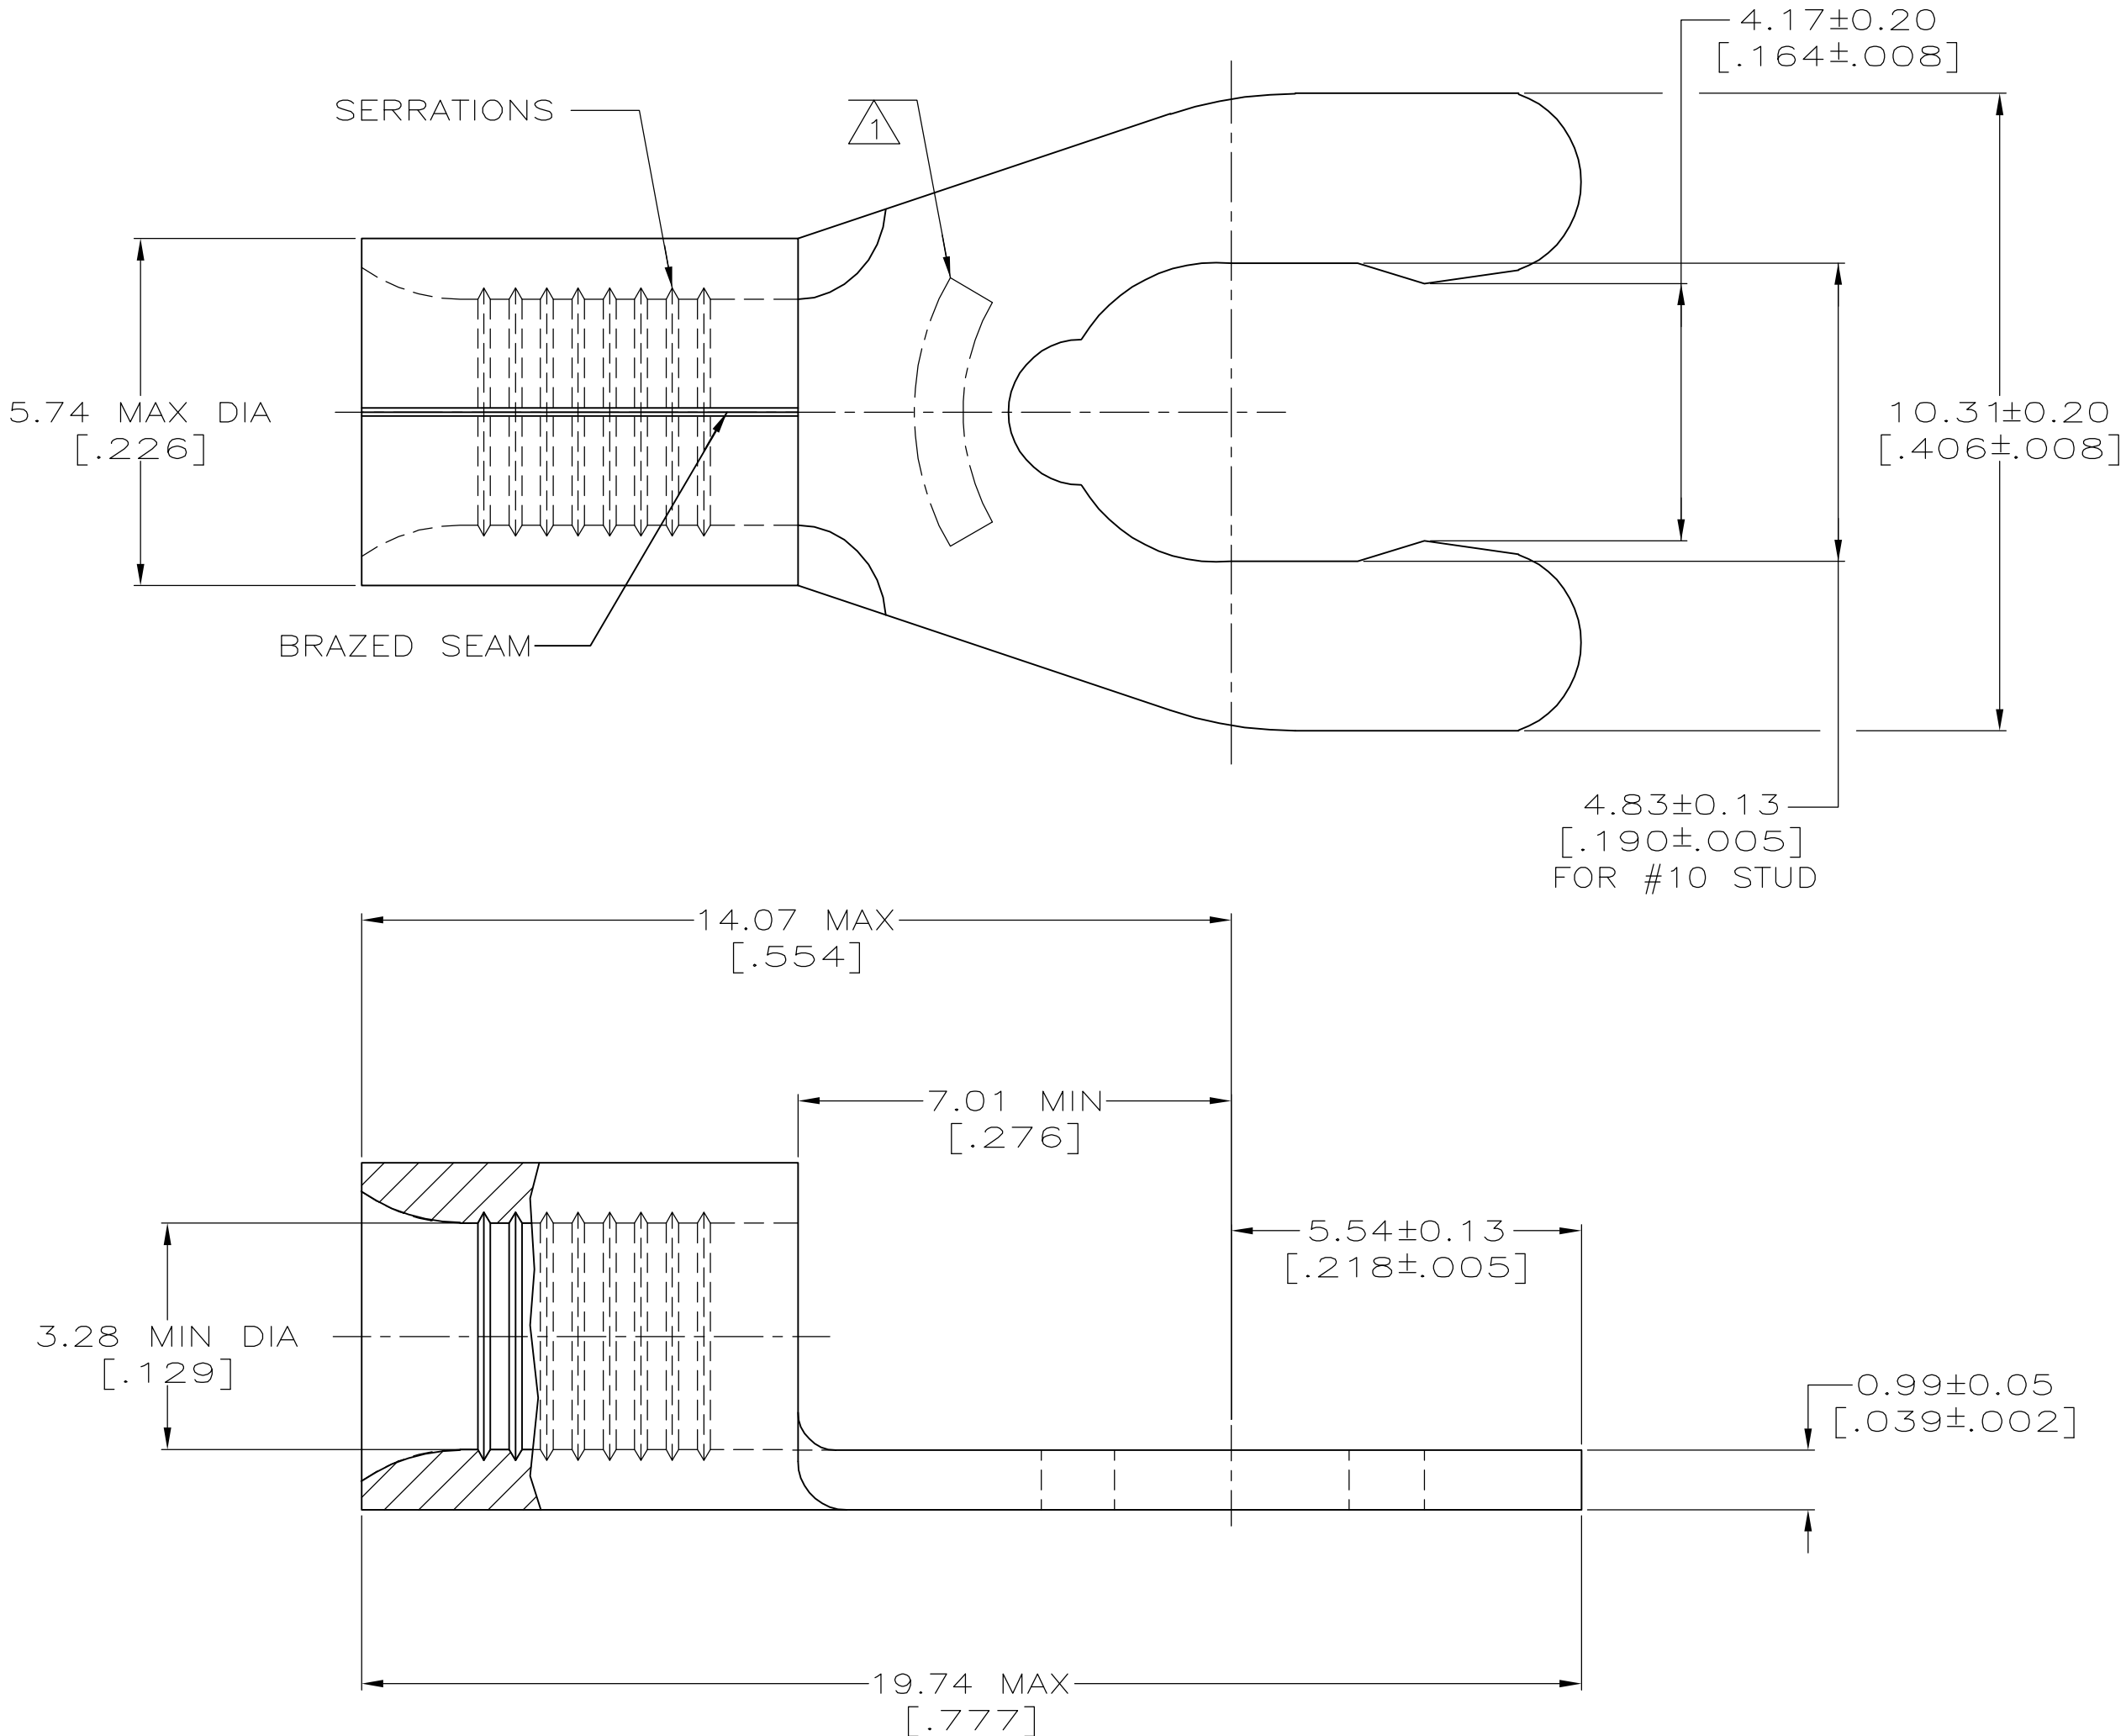

METRIC
 DIMENSIONS LISTED IN mm [INCHES]

| | |
|--------------------------------|---------------------------|
| AMP WIRE RANGE | E13288 Listed |
| 12-10 AWG SOLID OR STRANDED | 12-10 AWG STRANDED |
| LR7189 Certified | MILITARY P/N AND CLASS |
| 12-10 AWG SOLID OR STRANDED | NOT APPLICABLE |

STAMP 10S AMP 12-10* APPROX AS SHOWN
 10S INDICATES STUD SIZE

| 50 | LOOSE PIECE, BOX SPECIAL (NO WINDOW) | 8-53128-5 |
|----------|-----------------------------------------|-----------|
| 50 | LOOSE PIECE, BOX | 8-53128-2 |
| 2500 | ON TAPE | 53128-2 |
| ---- | LOOSE PIECE | 53128-1 |
| QUANTITY | PACKAGING TYPE | PART NO |

**AMP INCORPORATED
 CUSTOMER SERVICE SYSTEMS**

MAX RECOMMENDED OPERATING TEMPERATURE:
 170° C MAX

DO NOT SCALE PRINT. UNLESS SPECIFIED
 DIMENSIONS IN mm [INCHES]—
 TOLERANCES ON :
 2 PLC DEC ± -
 3 PLC DEC ± -
 ANGLES ± -
 MATERIAL
 PHOSPHOR BRONZE
 PER ASTM B-103
 ANNEALED
 FINISH
 TIN PLATE
 0.00254[.000100] MIN
 THK PER MIL-T-10727

DR 3-29-93
 TA BRINKMAN
 CHK 3-29-93
 DA PATTERSON
 APPD 3-29-93
 DE MILLER
 APPD 3-29-93
 JL MECKLEY
 PRODUCT SPEC
 -
 APPLICATION SPEC
 -
 WEIGHT -

AMP AMP Incorporated
 Harrisburg, PA 17105-3608

| | |
|----------------------------------------------------------------------------------|----------------------------------------------|
| FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS | PRODUCT INFORMATION CENTER 1-800-522-6752 |
| FOR APPLICATION TOOLING INFORMATION | TOOLING ASSISTANCE CENTER 1-800-722-1111 |
| FOR ORDER ENTRY | 1-800-526-5142 |

VOLTAGE RATING:
 NOT APPLICABLE
 WIRE CROSS SECTIONAL AREA RANGE:
 2.62-6.64mm²[5,180-13,100] CIR MILS
 SOLID OR STRANDED
 THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

| | | |
|-----------------------------------------------------------------------|--------------------|---------------------|
| NAME TERMINAL, SHORT SPRING SPADE, SOLISTRAND™ | | |
| SIZE 00779 | CAGE CODE 53128 | DRAWING NO 53128 |
| SCALE 10:1 | SHEET 10F 1 | |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)