
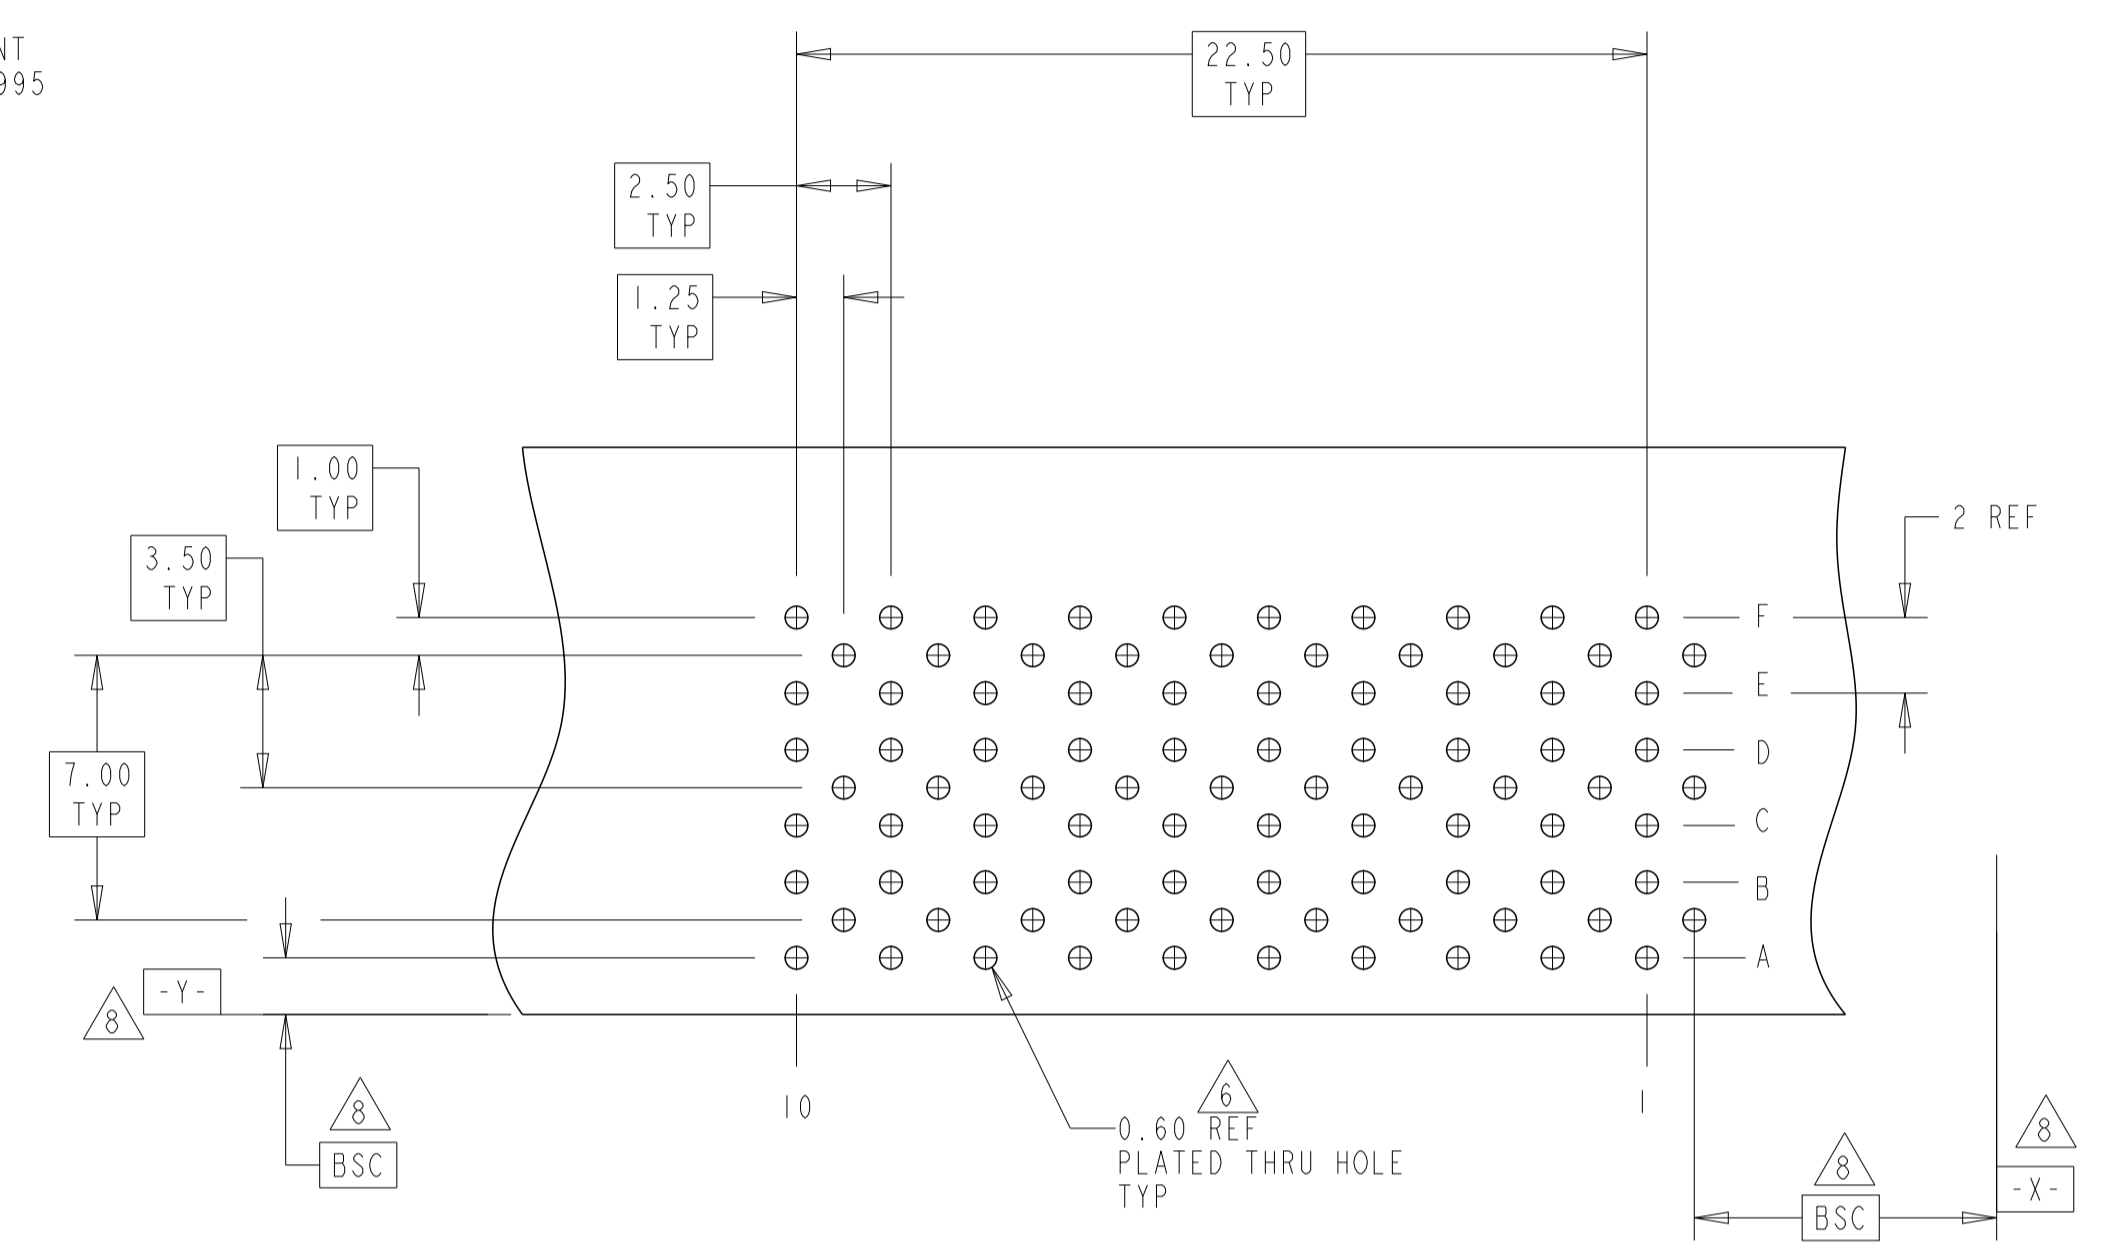
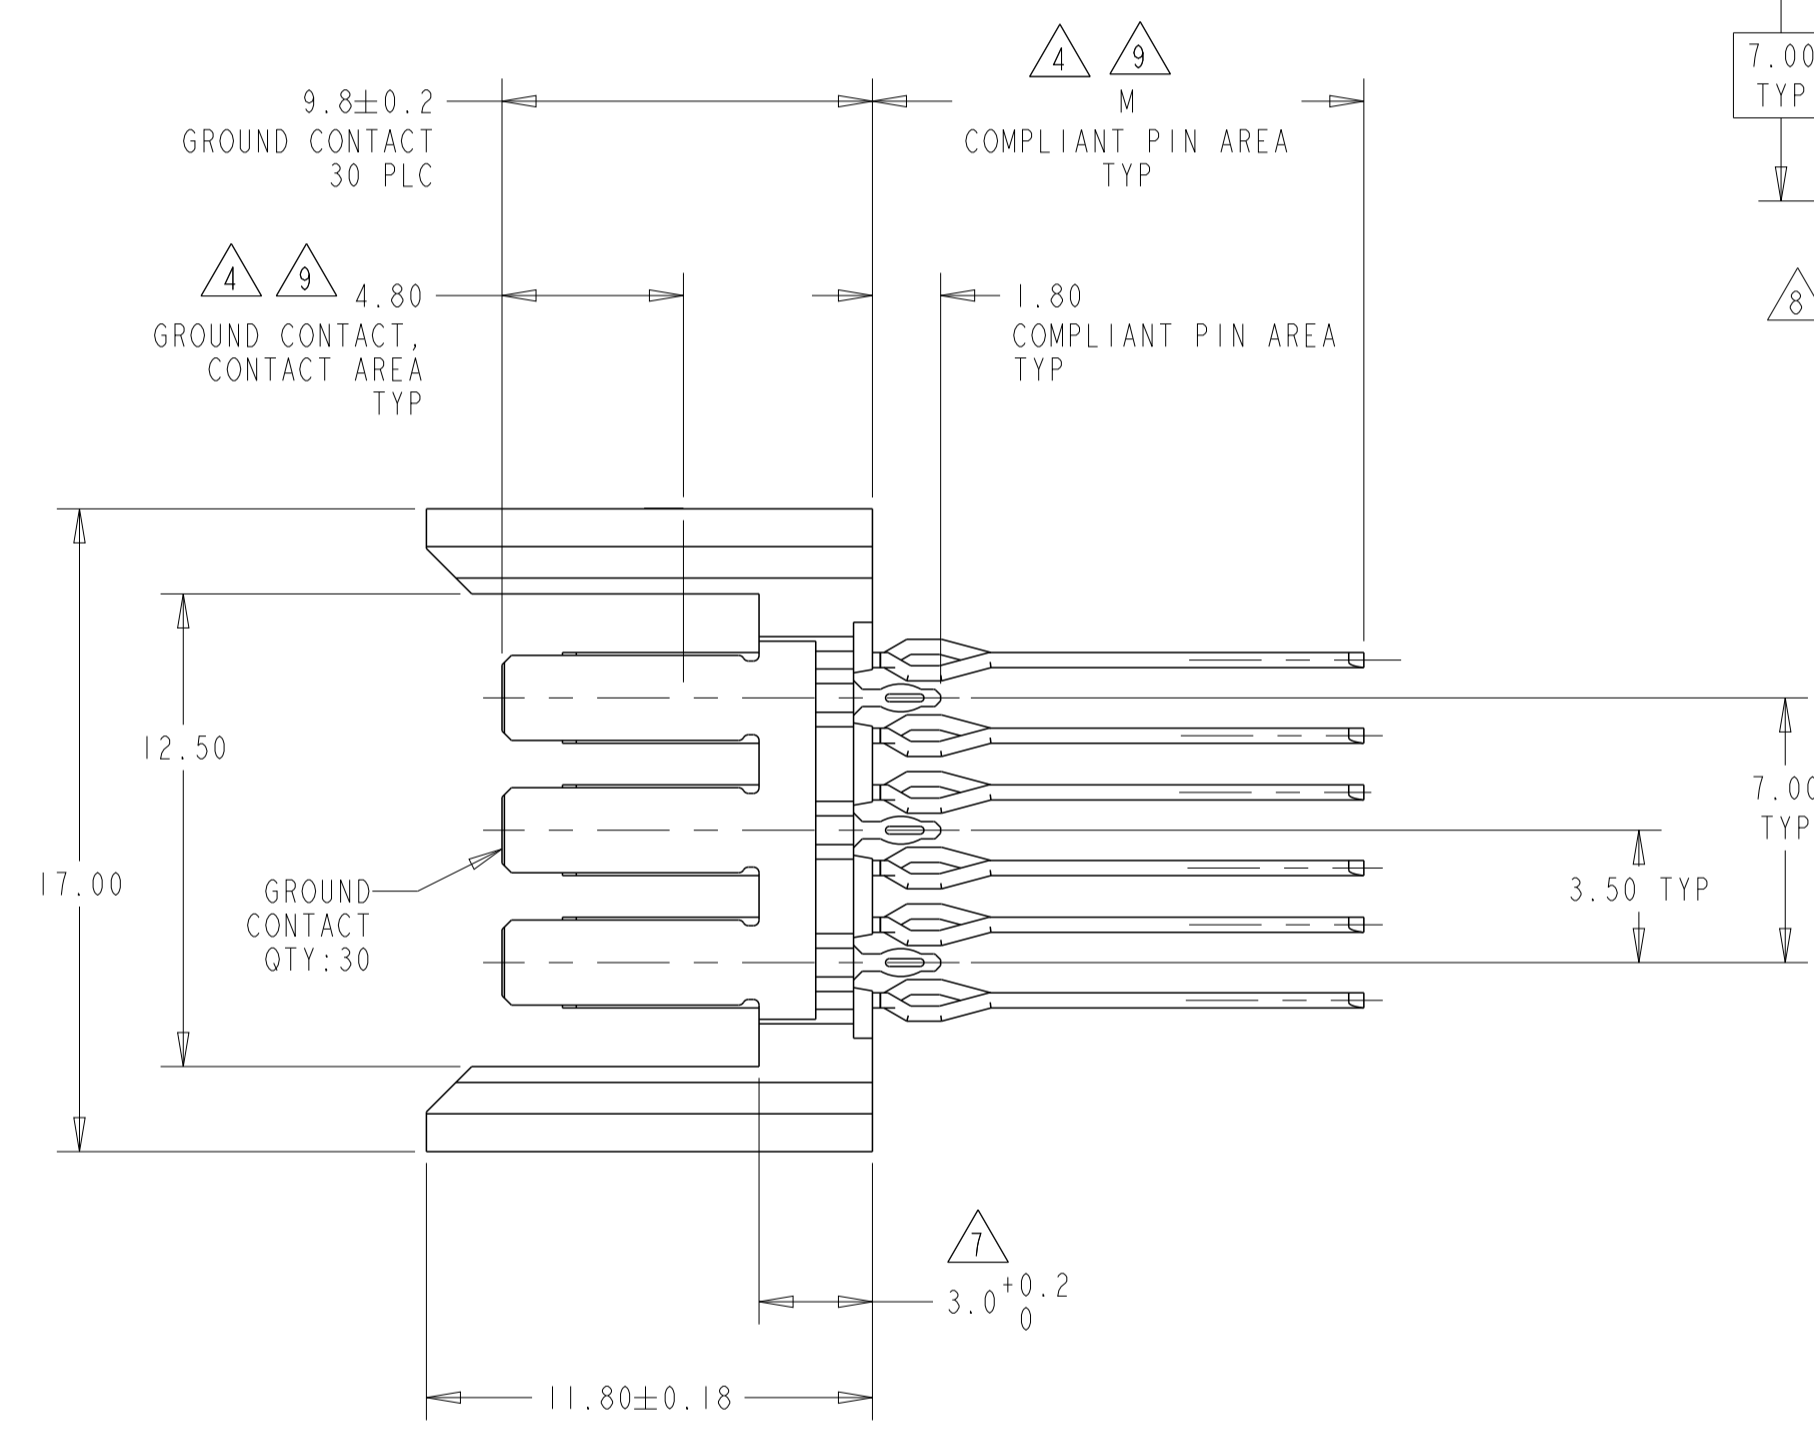
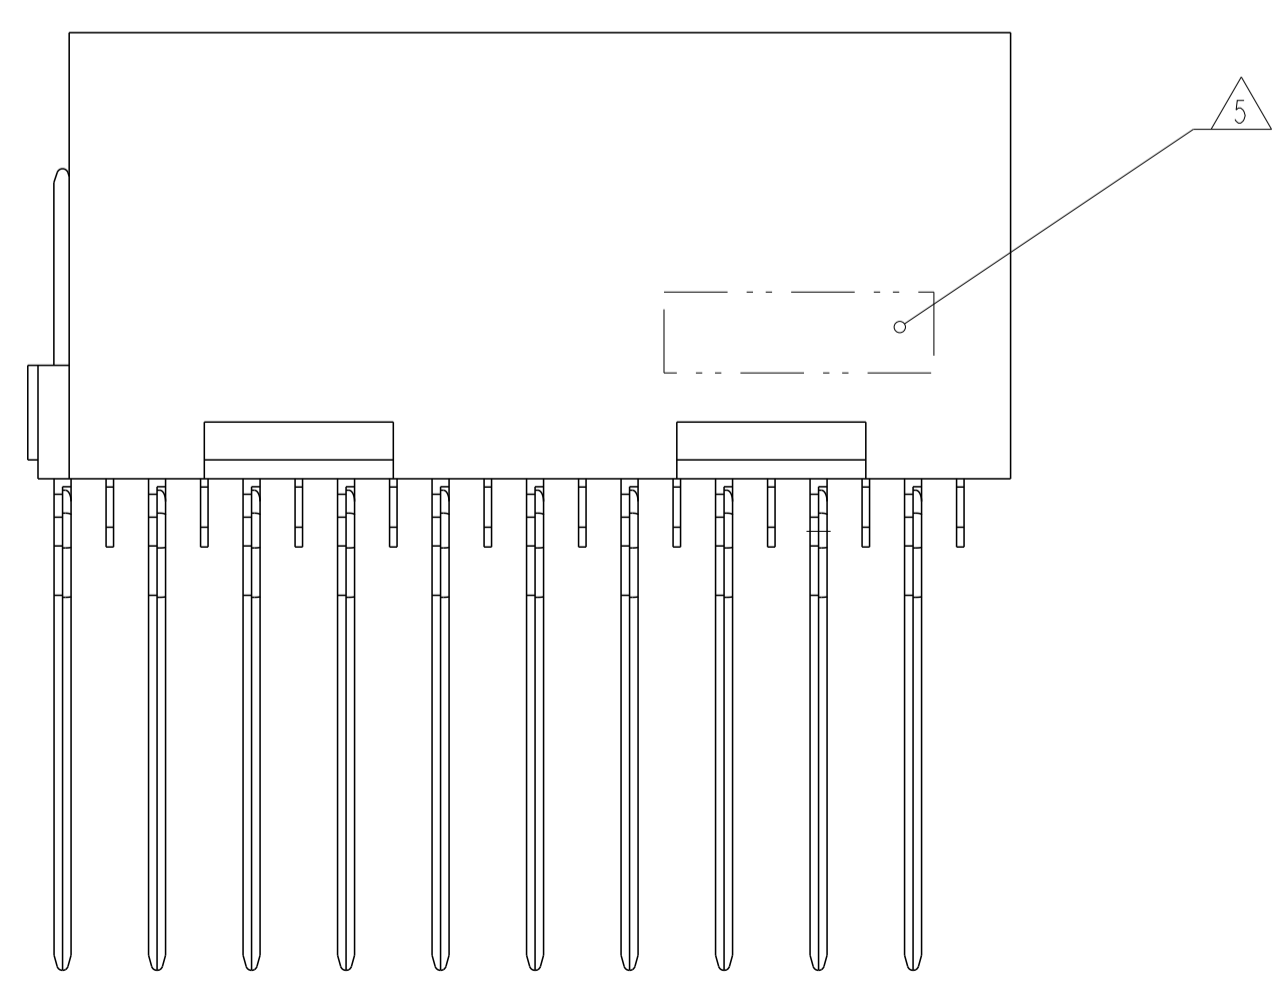
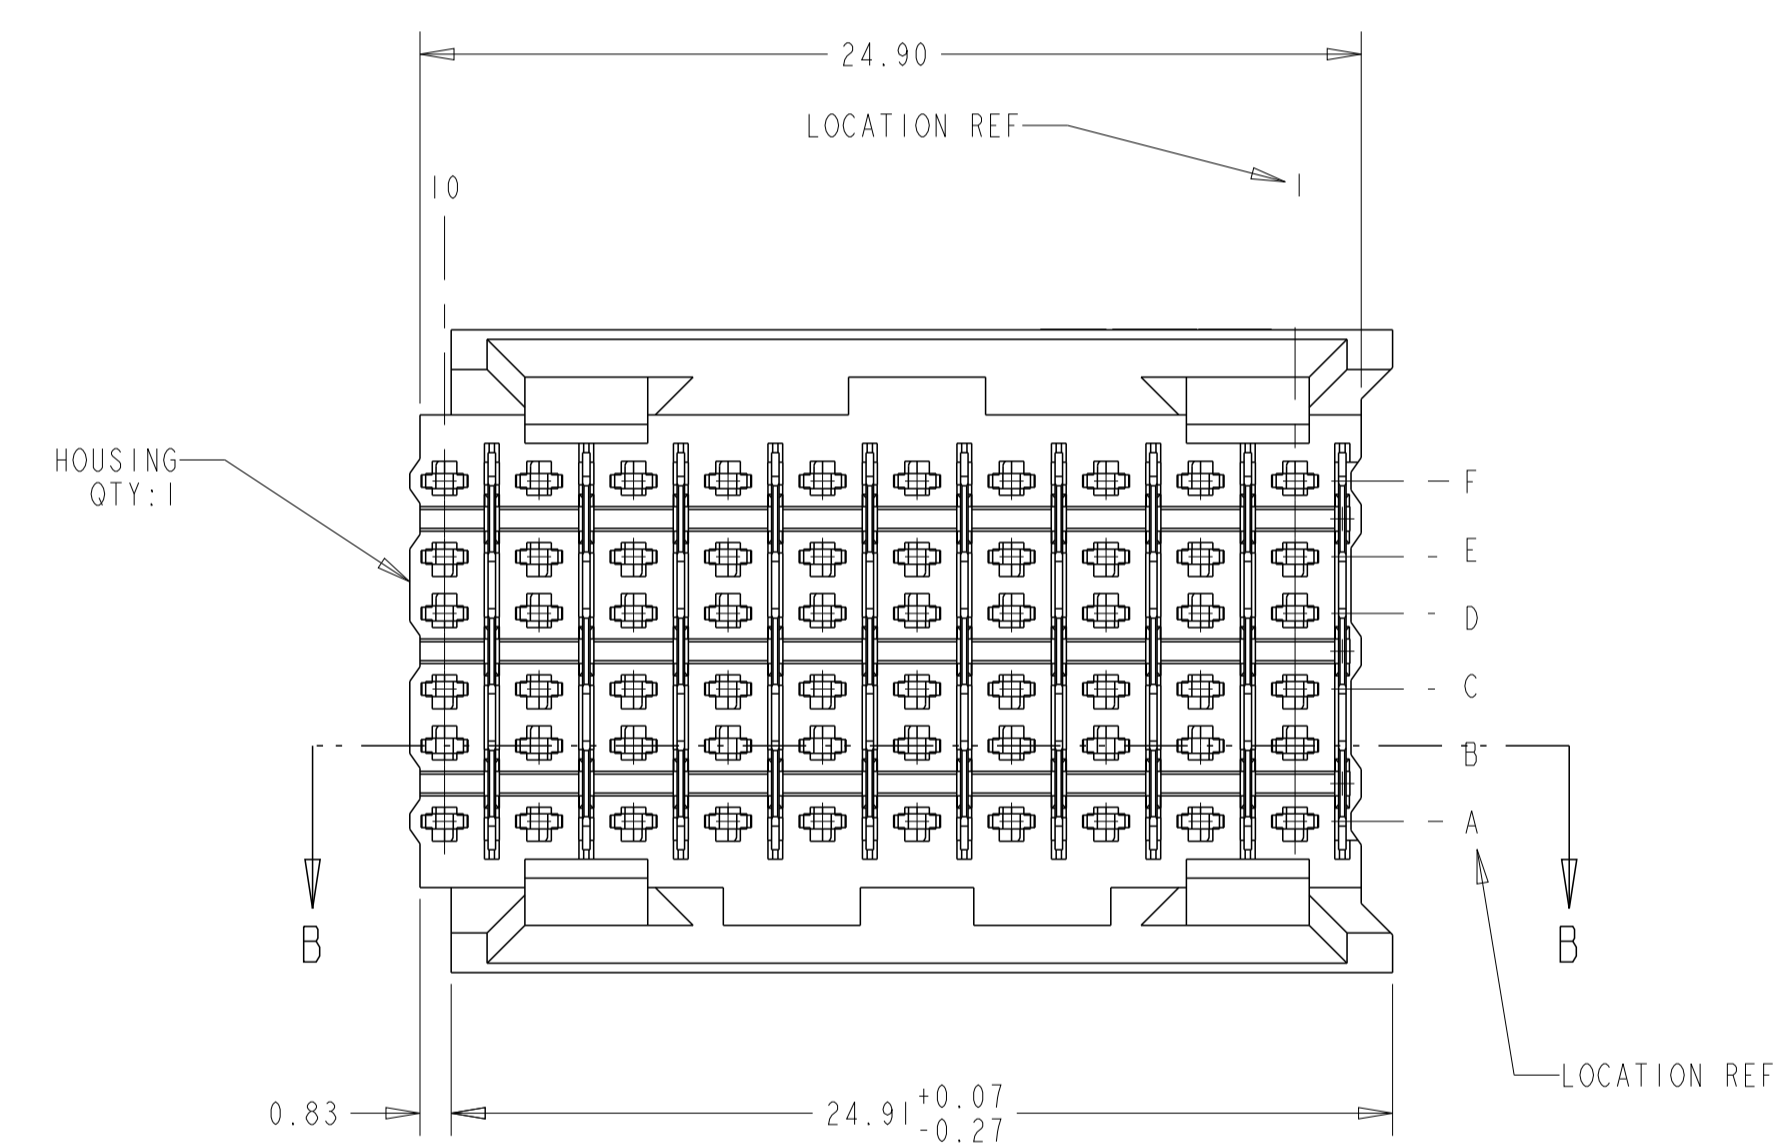


LOC	DIST	REV	DATE	DWN	APVD
AD	00	A	28SEP2012	KH	JE
REVISIONS					
DESCRIPTION			DATE	DWN	APVD
REVISED PER ECO-12-011334					

- 2 PHOSPHOR BRONZE
- 3 LCP, UL94V-0
- 4 FINISH:
CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF
TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON
TELCORDIA GR-1217-CORE; APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
COMPLIANT PIN AREA: 0.5µm MIN MATTE TIN OVER BASE PLATING.
- 5 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 6 REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED
PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- 7 APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- 8 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 9 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

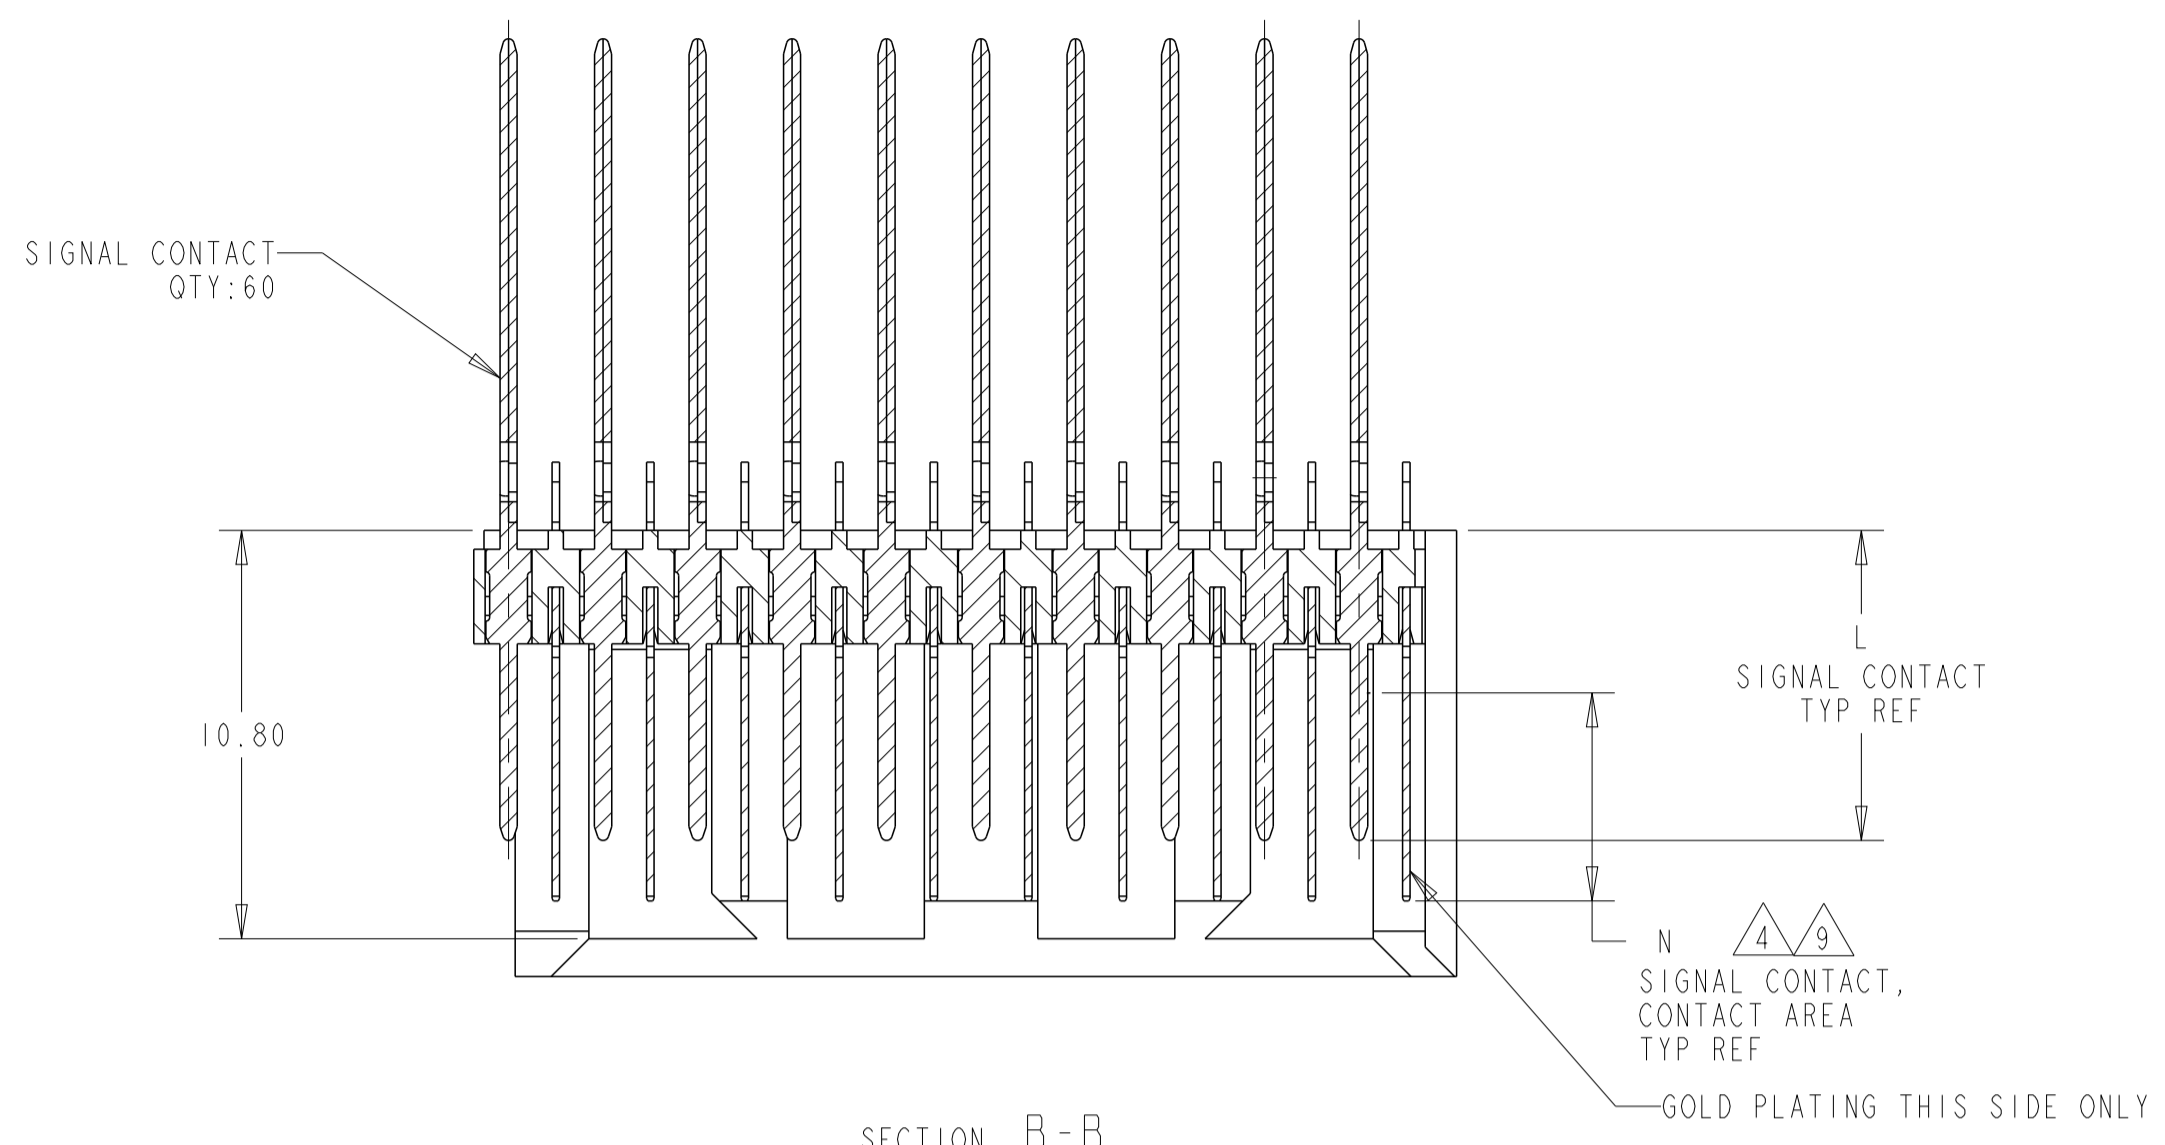

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

5.50	14.50	9.7	5120679-2
5.50	13.00	8.2	5120679-1
N	M	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN: B. CARBO 07DEC04	CHK: R. PATTERSON 07DEC04	APVD: H. PATTERSON 07DEC04
mm	0 PLC ±	NAME: B. PATTERSON 07DEC04		
	1 PLC ±	PRODUCT SPEC:		
	2 PLC ±0.13	APPLICATION SPEC:		
	3 PLC ±0.05	SIZE: A1		
	4 PLC ±	CAGE CODE: 00779		
	ANGLES ±	DRAWING NO: 5120679		
	FINISH ±	RESTRICTED TO:		
MATERIAL:	HOUSING: 3	WEIGHT:	SCALE: 5:1	
CONTACTS: 2	SIGNAL CONTACT: 4	Customer Drawing		SHEET 1 OF 1

TE Connectivity
 HEADER ASSEMBLY, 60 POSITION, 6 ROW, FEED THROUGH, BACKPLANE CONNECTOR, Z-PACK HS3

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)