



ISM 868 / 915 MHz ANTENNA

Part Numbers: 2195835-1~-8


FEATURES & BENEFITS

- ISM antenna, including of 868 / 915 ISM and IoT products
- Available cable lengths: 50,100,150,200 mm, custom specific (Different cable lengths having impact on RF performance, see individual RF data)
- Available connectors: MHF, MHF4 or compatible, custom specific
- FPC with double side adhesive tape simplifies mounting within the device even on curved areas
- Omnidirectional coverage


SPECIFICATIONS

P/N	2195835-1/-2/-3/-5/-6/-7	2195835-4/-8	
Frequency Range (MHz)	863-928	863-928	
VSWR	< 2.3:1	< 2.3:1	
Average Efficiency	35%	47%	
Peak Gain	1.4dBi	-0.9dBi	
Average Gain	-4.5dB	-3.2dB	
Power Handling	10 Watt cw		
Feed Point Impedance	50 ohms unbalanced		
Polarization	Linear		
Size	38 mm x 9.0 mm x 0.2 mm		
Weight	< 0.9 g		
Mounting	Adhesive flexible tape		
Mating Connectors	MHF type receptacle (TE PN 2337019-1), MHF4 type receptacle (TE PN: 2334884-1)		
Operating Temperature	-40 to +85°C		
Storage Temperature	-40 to +85°C		
Hazardous Materials	A certificate of conformance is available from the product page on TE website.		

RF DATA ≤ 150 mm cable length

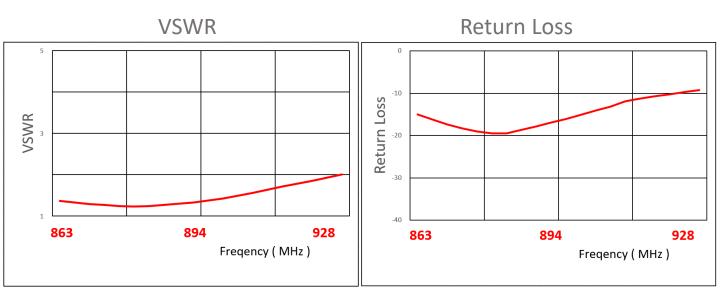


Efficiency

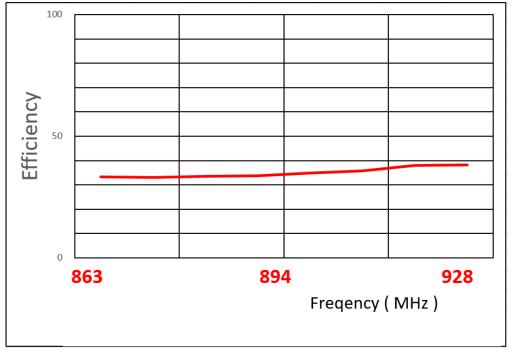


P/N : 2195835-1/-2/-3/-5/-6/-7 Data measured in free space and on plastic device enclosure


RADIATION PATTERN ≤ 150 mm cable length




Elevation 1 Plane Elevation 2 Plane



Elevation 1




Elevation 2




P/N : 2195835-1/-2/-3/-5/-6/-7 Data measured in free space and on plastic device enclosure

RF DATA for 200 mm cable length

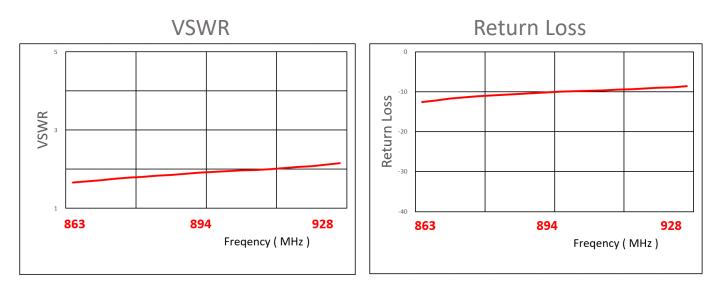


Efficiency

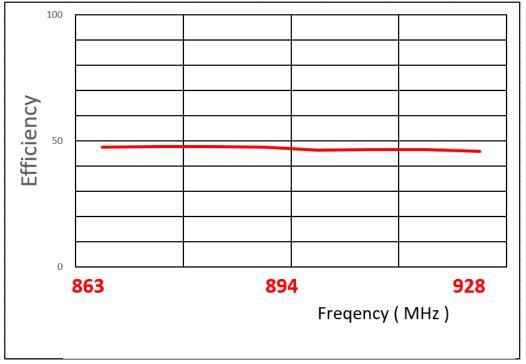


P/N: 2195835-4/-8

Data measured in free space and on plastic device enclosure


RADIATION PATTERN for 200 mm cable length




Elevation 1 Plane Elevation 2 Plane



Elevation 1

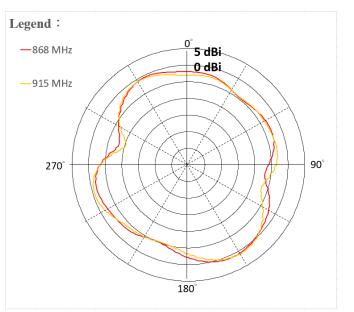






P/N : 2195835-4/-8 Data measured in free space and on plastic device enclosure

KEEP OUT AREA

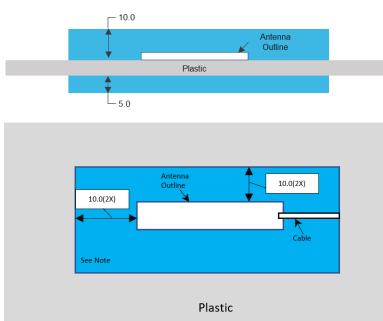


NOTES

- 1. Antenna designed to be mounted on plastic cover.
- 2. Area in blue indicates Keep Out Area
- 3. Contact TE if keep out zone cannot be guaranteed.

Dimension: mm Diagrams is not into scale


DIMENSIONS

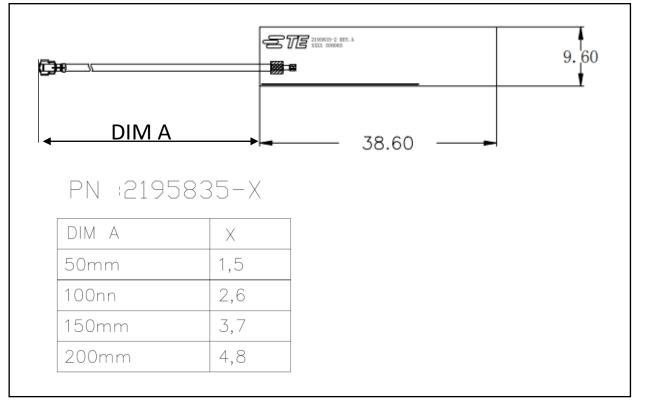


MATING COMPONENTS


					· · · · · · · · · · · · · · · · · · ·	
2195835-1	50	1.97	MHF-TYPE PLUG	1.13	RECEPTACLE (TE PN: 2337019-1)	
2195835-2	100	3.94	MHF-TYPE PLUG	1.13	RECEPTACLE (TE PN: 2337019-1)	
2195835-3	150	5.91	MHF-TYPE PLUG	1.13	RECEPTACLE (TE PN: 2337019-1)	
2195835-4	200	7.87	MHF-TYPE PLUG	1.13	RECEPTACLE (TE PN: 2337019-1)	
2195835-5	50	1.97	MHF4-TYPE PLUG	1.13	RECEPTACLE (TE PN: 2334884-1)	
2195835-6	100	3.94	MHF4-TYPE PLUG	1.13	RECEPTACLE (TE PN: 2334884-1)	
2195835-7	150	5.91	MHF4-TYPE PLUG	1.13	RECEPTACLE (TE PN: 2334884-1)	
2195835-8	200	7.87	MHF4-TYPE PLUG	1.13	RECEPTACLE (TE PN: 2334884-1)	100
PART	MM	INCH	CONNECTOR TYPE	Cable Dia mm	PART NUMBER	IMAGE
NUMBER	R CABLE LENGTH ("A")		(ON CABLE)		MATING COMPONE	NTS

PACKAGING



55REF Part Number: 2196835 REV. A DESC: STRADMED ANTENNA 077:100 Date Code: YVWD 201105EU SUBSTANCE COMP g com Number of labels





100pcs/Bag 25 or 50 PCS/Bundle drying agent:1pcs/Bag

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

For phone numbers in other countries, go to te.com/support-center

te.com

TE Connectivity, TE Connectivity (logo) are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

 $\ensuremath{\textcircled{\sc 0}}$ 2020 TE Connectivity Ltd. family of companies All Rights Reserved.

09/2020





单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)