


- Three-terminal fixed output voltage regulator 0.5W 0.15A -5V-24V

- Three-terminal negative voltage regulator

- Main purposes:

The role of regulator and protection for a variety of electrical appliances, electronic equipment, regulator circuit

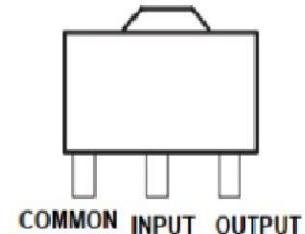

- Maximum Ratings

Parameter		Symbol	Ratings	Unit
Input voltage ($T_A=25^\circ\text{C}$)	79L05~79L15	V_I	-35	V
	79L18~79L24		-40	
Output current		I_O	0.15	A
Total power dissipation ($T_A=25^\circ\text{C}$) ^{*)}		P_D	0.5	W
Work (tube shell) temperature		T_{OP}	-40~85	°C
Storage temperature		T_{stg}	-55~150	°C

Note: Devices installed in good thermal environment

79L05 Electrical characteristics (Unless otherwise specified $0 \leq T_J \leq +125^\circ\text{C}$, $V_i = -10\text{V}$, $I_o = 40\text{mA}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Parameter name	Symbol	Test Condition		Min	Typ	MAX	Unit
Output Voltage	V_o	$T_J = 25^\circ\text{C}$		-4.8	-5	-5.2	V
		$1\text{mA} \leq I_o \leq 40\text{mA}, -7\text{V} \leq V_i \leq -20\text{V}$		-4.75	-5	-5.25	
Voltage Regulation	S_v	$T_J = 25^\circ\text{C}$	-7V $\leq V_i \leq -20\text{V}$	—	—	150	mV
			-8V $\leq V_i \leq -20\text{V}$	—	—	100	
Current Regulation	S_I	$T_J = 25^\circ\text{C}, 1\text{mA} \leq I_o \leq 100\text{mA}$		—	—	60	mV
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$		—	—	6	mA
Quiescent Current Change	ΔI_Q	$1\text{mA} \leq I_o \leq 40\text{mA}$		—	—	0.1	mA
		$-8\text{V} \leq V_i \leq -20\text{V}$		—	—	1.5	
Input - output differential pressure	$ V_i - V_o $	$T_J = 25^\circ\text{C}$		—	1.7	—	V
Ripple Rejection Ratio	S_{RIP}	$-8\text{V} \leq V_i \leq -18\text{V}; f = 120\text{Hz}$		—	49	—	dB

79L06 Electrical characteristics (Unless otherwise specified $0 \leq T_J \leq +125^\circ\text{C}$, $V_i = -11\text{V}$, $I_o = 40\text{mA}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Parameter name	Symbol	Test Condition		Min	Typ	Max	Unit
Output Voltage	V_o	$T_J = 25^\circ\text{C}$		-5.76	-6	-6.24	V
		$1\text{mA} \leq I_o \leq 40\text{mA}, -8.1\text{V} \leq V_i \leq -21\text{V}$		-5.7	-6	-6.3	
Voltage Regulation	S_v	$T_J = 25^\circ\text{C}$	-8.1V $\leq V_i \leq -21\text{V}$	—	—	150	mV
			-9V $\leq V_i \leq -21\text{V}$	—	—	110	
Current Regulation	S_I	$T_J = 25^\circ\text{C}, 1\text{mA} \leq I_o \leq 100\text{mA}$		—	—	70	mV
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$		—	—	6	mA
Quiescent Current Change	ΔI_Q	$1\text{mA} \leq I_o \leq 40\text{mA}$		—	—	0.1	mA
		$-9\text{V} \leq V_i \leq -20\text{V}$		—	—	1.5	
Input - output differential pressure	$ V_i - V_o $	$T_J = 25^\circ\text{C}$		—	1.7	—	V
Ripple Rejection Ratio	S_{RIP}	$-9\text{V} \leq V_i \leq -19\text{V}; f = 120\text{Hz}$		—	47	—	dB

79L08 Electrical characteristics (Unless otherwise specified $0 \leq T_J \leq +125^\circ\text{C}$, $V_I = -14\text{V}$, $I_O = 40\text{mA}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Parameter name	Symbol	Test Condition		Min	Typ	Max	Unit
Output Voltage	V_O	$T_J = 25^\circ\text{C}$		-7.7	-8	-8.3	V
		$1\text{mA} \leq I_O \leq 40\text{mA}, -10.5\text{V} \leq V_I \leq -23\text{V}$		-7.6	-8	-8.4	
Voltage Regulation	S_V	$T_J = 25^\circ\text{C}$	-10.5V $\leq V_I \leq -23\text{V}$	—	—	175	mV
			-11V $\leq V_I \leq -23\text{V}$	—	—	125	
Current Regulation	S_I	$T_J = 25^\circ\text{C}, 1\text{mA} \leq I_O \leq 100\text{mA}$		—	—	80	mV
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$		—	—	6.5	mA
Quiescent Current Change	ΔI_Q	$1\text{mA} \leq I_O \leq 40\text{mA}, -11\text{V} \leq V_I \leq -23\text{V}$		—	—	0.1	mA
				—	—	1.5	
Input - output differential pressure	$ V_I - V_O $	$T_J = 25^\circ\text{C}$		—	1.7	—	V
Ripple Rejection Ratio	S_{RIP}	$-12\text{V} \leq V_I \leq -23\text{V}; f = 120\text{Hz}$		—	45	—	dB

 79L09 Electrical characteristics (Unless otherwise specified $0 \leq T_J \leq +125^\circ\text{C}$, $V_I = -15\text{V}$, $I_O = 40\text{mA}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Parameter name	Symbol	Test Condition		Min	Typ	Max	Unit
Output Voltage	V_O	$T_J = 25^\circ\text{C}$		-8.64	-9	-9.36	V
		$1\text{mA} \leq I_O \leq 40\text{mA}, -11.4\text{V} \leq V_I \leq -24\text{V}$		-8.55	-9	-9.45	
Voltage Regulation	S_V	$T_J = 25^\circ\text{C}$	-11.4V $\leq V_I \leq -24\text{V}$	—	—	200	mV
			-12V $\leq V_I \leq -24\text{V}$	—	—	160	
Current Regulation	S_I	$T_J = 25^\circ\text{C}, 1\text{mA} \leq I_O \leq 100\text{mA}$		—	—	90	mV
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$		—	—	6.5	mA
Quiescent Current Change	ΔI_Q	$1\text{mA} \leq I_O \leq 40\text{mA}$		—	—	0.1	mA
		$-12\text{V} \leq V_I \leq -24\text{V}$		—	—	1.5	
Input - output differential pressure	$ V_I - V_O $	$T_J = 25^\circ\text{C}$		—	1.7	—	V
Ripple Rejection Ratio	S_{RIP}	$-12\text{V} \leq V_I \leq -24\text{V}; f = 120\text{Hz}$		—	44	—	dB

 79L10 Electrical characteristics (Unless otherwise specified $0 \leq T_J \leq +125^\circ\text{C}$, $V_I = -16\text{V}$, $I_O = 40\text{mA}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Parameter name	Symbol	Test Condition		Min	Typ	Max	Unit
Output Voltage	V_O	$T_J = 25^\circ\text{C}$		-9.6	-10	-10.4	V
		$1\text{mA} \leq I_O \leq 40\text{mA}, -12.5\text{V} \leq V_I \leq -25\text{V}$		-9.5	-10	-10.5	
Voltage Regulation	S_V	$T_J = 25^\circ\text{C}$	-12.5V $\leq V_I \leq -25\text{V}$	—	—	230	mV
			-13V $\leq V_I \leq -25\text{V}$	—	—	170	
Current Regulation	S_I	$T_J = 25^\circ\text{C}, 1\text{mA} \leq I_O \leq 100\text{mA}$		—	—	90	mV
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$		—	—	6.5	mA
Quiescent Current Change	ΔI_Q	$1\text{mA} \leq I_O \leq 40\text{mA}$		—	—	0.1	mA
		$-13\text{V} \leq V_I \leq -25\text{V}$		—	—	1.5	
Input - output differential pressure	$ V_I - V_O $	$T_J = 25^\circ\text{C}$		—	1.7	—	V
Ripple Rejection Ratio	S_{RIP}	$-13\text{V} \leq V_I \leq -24\text{V}; f = 120\text{Hz}$		—	43	—	dB

79L12 Electrical characteristics (Unless otherwise specified $0 \leq T_J \leq +125^\circ\text{C}$, $V_i = -19\text{V}$, $I_o = 40\text{mA}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Parameter name	Symbol	Test Condition		Min	Typ	Max	Unit
Output Voltage	V_O	$T_J = 25^\circ\text{C}$		-11.5	-12	-12.5	V
		$1\text{mA} \leq I_o \leq 40\text{mA}, -14.5\text{V} \leq V_i \leq -27\text{V}$		-11.4	-12	-12.6	
Voltage Regulation	S_V	$T_J = 25^\circ\text{C}$	-14.5V $\leq V_i \leq -27\text{V}$	—	—	250	mV
			-16V $\leq V_i \leq -27\text{V}$	—	—	200	
Current Regulation	S_I	$T_J = 25^\circ\text{C}, 1\text{mA} \leq I_o \leq 100\text{mA}$		—	—	100	mV
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$		—	—	6.5	mA
Quiescent Current Change	ΔI_Q	$1\text{mA} \leq I_o \leq 40\text{mA}$		—	—	0.1	mA
		$-16\text{V} \leq V_i \leq -27\text{V}$		—	—	1.5	
Input - output differential pressure	$ V_I - V_O $	$T_J = 25^\circ\text{C}$		—	1.7	—	V
Ripple Rejection Ratio	S_{RIP}	$-15\text{V} \leq V_i \leq -25\text{V}; f = 120\text{Hz}$		—	42	—	dB

79L15 Electrical characteristics (Unless otherwise specified $0 \leq T_J \leq +125^\circ\text{C}$, $V_i = -23\text{V}$, $I_o = 40\text{mA}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Parameter name	Symbol	Test Condition		Min	Typ	Max	Unit
Output Voltage	V_O	$T_J = 25^\circ\text{C}$		-14.4	-15	-15.6	V
		$1\text{mA} \leq I_o \leq 40\text{mA}, -17.5\text{V} \leq V_i \leq -30\text{V}$		-14.25	-15	-15.75	
Voltage Regulation	S_V	$T_J = 25^\circ\text{C}$	-17.5V $\leq V_i \leq -30\text{V}$	—	—	300	mV
			-20V $\leq V_i \leq -30\text{V}$	—	—	250	
Current Regulation	S_I	$T_J = 25^\circ\text{C}, 1\text{mA} \leq I_o \leq 100\text{mA}$		—	—	150	mV
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$		—	—	6.5	mA
Quiescent Current Change	ΔI_Q	$1\text{mA} \leq I_o \leq 40\text{mA}$		—	—	0.1	mA
		$-20\text{V} \leq V_i \leq -30\text{V}$		—	—	1.5	
Input - output differential pressure	$ V_I - V_O $	$T_J = 25^\circ\text{C}$		—	1.7	—	V
Ripple Rejection Ratio	S_{RIP}	$-18.5\text{V} \leq V_i \leq -28.5\text{V}; f = 120\text{Hz}$		—	39	—	dB

79L18 Electrical characteristics (Unless otherwise specified $0 \leq T_J \leq +125^\circ\text{C}$, $V_i = -27\text{V}$, $I_o = 40\text{mA}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Parameter name	Symbol	Test Condition		Min	Typ	Max	Unit
Output Voltage	V_O	$T_J = 25^\circ\text{C}$		-17.3	-18	-18.7	V
		$1\text{mA} \leq I_o \leq 40\text{mA}, -20.7\text{V} \leq V_i \leq -33\text{V}$		-17.1	-18	-18.9	
Voltage Regulation	S_V	$T_J = 25^\circ\text{C}$	-20.7V $\leq V_i \leq -33\text{V}$	—	—	325	mV
			-21V $\leq V_i \leq -33\text{V}$	—	—	275	
Current Regulation	S_I	$T_J = 25^\circ\text{C}, 1\text{mA} \leq I_o \leq 100\text{mA}$		—	—	170	mV
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$		—	—	6.5	mA
Quiescent Current Change	ΔI_Q	$1\text{mA} \leq I_o \leq 40\text{mA}$		—	—	0.1	mA
		$-21\text{V} \leq V_i \leq -33\text{V}$		—	—	1.5	
Input - output differential pressure	$ V_I - V_O $	$T_J = 25^\circ\text{C}$		—	1.7	—	V
Ripple Rejection Ratio	S_{RIP}	$-23\text{V} \leq V_i \leq -33\text{V}; f = 120\text{Hz}$		—	48	—	dB


79L20 Electrical characteristics (Unless otherwise specified $0 \leq T_J \leq +125^\circ\text{C}$, $V_i = -29\text{V}$, $I_o = 40\text{mA}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Parameter name	Symbol	Test Condition		Min	Typ	Max	Unit
Output Voltage	V_o	$T_J = 25^\circ\text{C}$		-19.2	-20	-20.8	V
		$1\text{mA} \leq I_o \leq 40\text{mA}$, $-23.5\text{V} \leq V_i \leq -35\text{V}$		-19.0	-20	-21.0	
Voltage Regulation	S_v	$T_J = 25^\circ\text{C}$	$-23.5\text{V} \leq V_i \leq -35\text{V}$	—	—	330	mV
			$-24\text{V} \leq V_i \leq -35\text{V}$	—	—	285	
Current Regulation	S_i	$T_J = 25^\circ\text{C}$, $1\text{mA} \leq I_o \leq 100\text{mA}$		—	—	180	mV
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$		—	—	6.5	mA
Quiescent Current Change	ΔI_Q	$1\text{mA} \leq I_o \leq 40\text{mA}$		—	—	0.1	mA
		$-24\text{V} \leq V_i \leq -35\text{V}$		—	—	1.5	
Input - output differential pressure	$ V_i - V_o $	$T_J = 25^\circ\text{C}$		—	1.7	—	V
Ripple Rejection Ratio	S_{RIP}	$-27\text{V} \leq V_i \leq -35\text{V}$; $f = 120\text{Hz}$		—	37	—	dB


 79L24 Electrical characteristics (Unless otherwise specified $0 \leq T_J \leq +125^\circ\text{C}$, $V_i = -33\text{V}$, $I_o = 40\text{mA}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

Parameter name	Symbol	Test Condition		Min	Typ	Max	Unit
Output Voltage	V_o	$T_J = 25^\circ\text{C}$		-23.0	-24	-25.0	V
		$1\text{mA} \leq I_o \leq 40\text{mA}$, $-27\text{V} \leq V_i \leq -38\text{V}$		-22.8	-24	-25.2	
Voltage Regulation	S_v	$T_J = 25^\circ\text{C}$	$-27\text{V} \leq V_i \leq -38\text{V}$	—	—	350	mV
			$-28\text{V} \leq V_i \leq -38\text{V}$	—	—	300	
Current Regulation	S_i	$T_J = 25^\circ\text{C}$, $1\text{mA} \leq I_o \leq 100\text{mA}$		—	—	200	mV
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$		—	—	6.5	mA
Quiescent Current Change	ΔI_Q	$1\text{mA} \leq I_o \leq 40\text{mA}$		—	—	0.1	mA
		$-28\text{V} \leq V_i \leq -38\text{V}$		—	—	1.5	
Input - output differential pressure	$ V_i - V_o $	$T_J = 25^\circ\text{C}$		—	1.7	—	V
Ripple Rejection Ratio	S_{RIP}	$-29\text{V} \leq V_i \leq -35\text{V}$; $f = 120\text{Hz}$		—	47	—	dB

Typical Characteristics

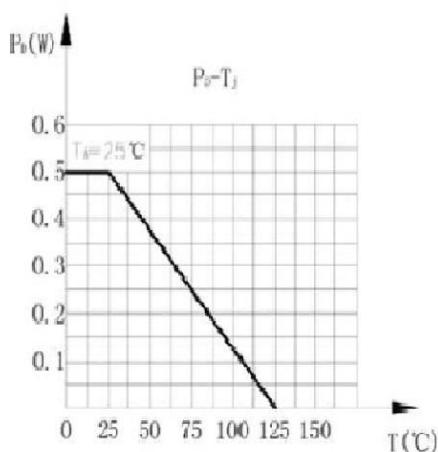


Dissipation of power and temperature curves

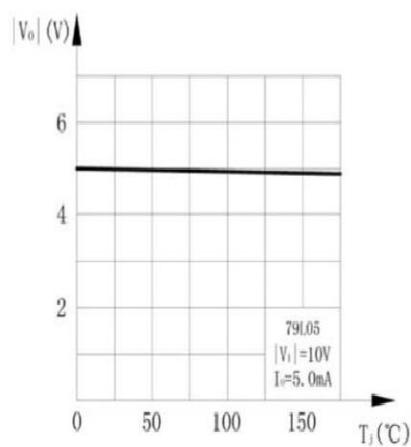

The curve of the output voltage and junction temperature

SOT-89 Dimensions

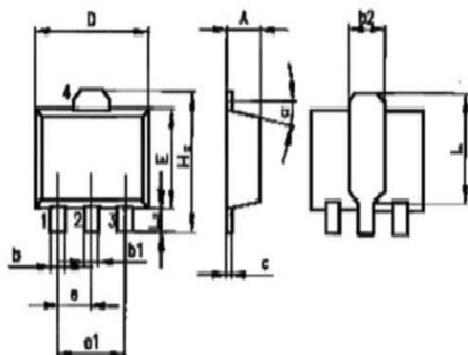

Unit: mm

Size		SOT-89			Size		SOT-89		
Symbol		min	typ	max	Symbol		min	typ	max
A			1.5		e			1.5	
b				0.65	e1			3	
b1				0.65	H _E			4.25	
b2			1.6		L	2.6		2.95	
c	0.25				L _E	0.8		1.2	
D			4.5		a			10°	
E				2.6					

单击下面可查看定价，库存，交付和生命周期等信息

[>>UMW\(友台半导体\)](#)