

**LTCC Multi Layer Ceramic Band Pass Filter- 1608 (0603) size**

- RFBPF1606K358Q1C

**FEATURES**

- Miniature footprint: 1.6 X 0.8 X 0.6 mm<sup>3</sup>
- Loss Insertion Loss
- High Rejection Rate
- LTCC process

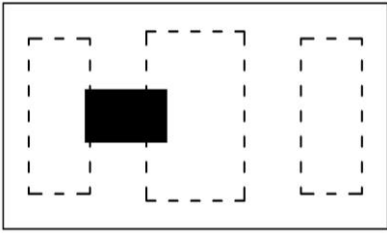
**APPLICATIONS**

- 5150 ~ 7125 MHz working frequency

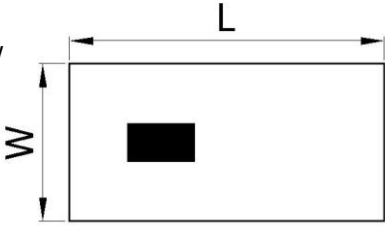


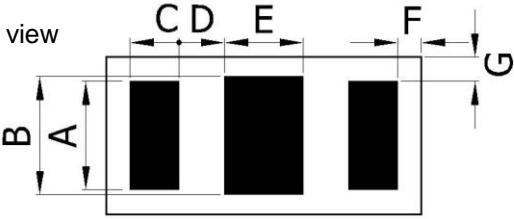
**ELECTRICAL CHARACTERISTICS**

Item	Specification
Frequency Range	5150 ~ 7125 MHz
Insertion Loss	0.9 dB typ. at +25°C
Attenuation	45 dB typ. @ 100 – 960 MHz 43 dB typ. @ 1160 – 1250 MHz 41 dB typ. @ 1420 – 1610 MHz 41 dB typ. @ 1690 – 2200 MHz 41 dB typ. @ 2300 – 2370 MHz 42 dB typ. @ 2400 – 2490 MHz 42 dB typ. @ 2490 – 2690 MHz 48 dB typ. @ 3300 – 3800 MHz 25 dB typ. @ 3800 – 4200 MHz 42 dB typ. @ 9600 – 9800 MHz 45 dB typ. @ 10300 – 11850 MHz 34 dB typ. @ 11850 – 14250 MHz 24 dB typ. @ 15450 – 21750 MHz
VSWR	2.0
Impedance	50 Ω
Power Capacity	2W max.
Moisture sensitivity levels	MSL is LEVEL 1 (Refer to : IPC/JEDEC J-STD-020)
HBM ESD	Pass 1KV on all pins (Base on AEC-Q200-002)
MM ESD	Pass 200V (Base on EIA/JESD22-A115)
<b>Operating &amp; Storage Condition (Component)</b>	
Operation Temperature Range: -40 ~ +85 °C	
Storage Temperature Range: -40 ~ +85 °C	
<b>Storage Condition before Soldering (Included packaging material)</b>	
Taping Quantity : 4000pcs per 7" reel	
Storage Temperature Range: +5 ~ +40 °C	
Humidity: 30 to 70% relative humidity	

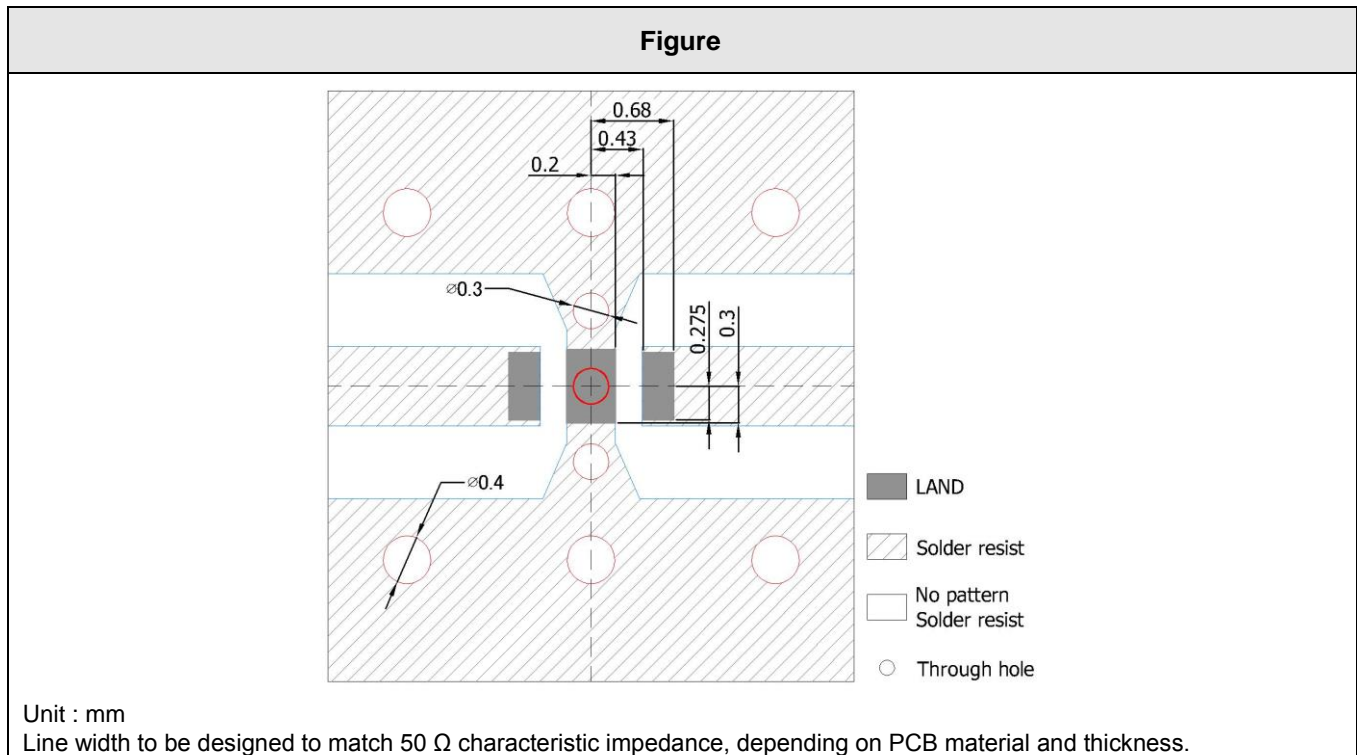
**CONSTRUCTION**

Figure	PIN	Connection
Top view 	1	Input
	2	GND
	3	Output

**DIMENSIONS**

Figure	Symbol	Dimension (mm)
Top view 	L	$1.60 \pm 0.10$
	W	$0.80 \pm 0.10$
Side view 	T	$0.60 \pm 0.10$
	A	$0.55 \pm 0.10$
Side view 	B	$0.60 \pm 0.10$
Bottom view 	C	$0.23 \pm 0.10$
	D	$0.23 \pm 0.10$
	E	$0.40 \pm 0.10$
	F	$0.12 \pm 0.10$
	G	$0.125 \pm 0.10$
	A	$0.55 \pm 0.10$
	B	$0.60 \pm 0.10$

LAND PATTERN



**CONTACT INFORMATION**

For more information, please contact with

**Walsin Technology Corporation.**

**Tel :** 886-3-475-8711

**Fax :** 886-3-475-5197

**E mail :** info@passivecomponent.com

**Web Site :** http://www.passivecomponent.com

*Specification subject to change without prior notice.*

单击下面可查看定价，库存，交付和生命周期等信息

[>>Walsin Technology\(华新科技\)](#)