





SECT B-B

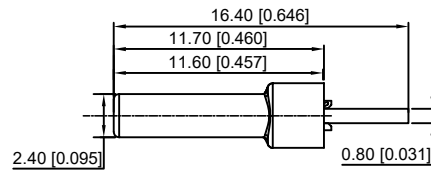

D  
2:1

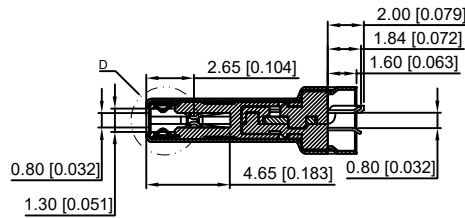

SECT A-A




P/N	R/C
U261-24XXN-4B0140	RP(56KΩ)
U261-24XXN-4B0177	

U261-24XXN-4B0140U

1: Au  
2: Ni

1:Au1u"  
2:Au3u"  
4:Au15u"  
5:Au30u"

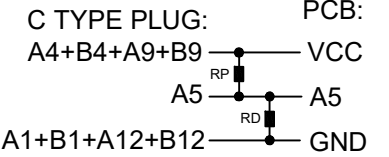

A6+A7短路, PCB板不引焊盘

REMARKS:

- CONTACT INSERTION AND WITHDRAW FORCE :
  - Insertion force : 5N-20N max.
  - Withdrawal force : 8N-20N.
- Durability : 10000Cycles.
- ELECTRIC PROPERTY :
  - Contact current rating : 3A.
  - Dielectric Strength : 100V AC(RMS).
  - Insulation Resistance : 100 megaohms min.
  - Contact resistance :
    - 40mOhms MAX.FOR VBUS,GND AND OTHER CONTACT
    - 50mOhms MAX.AFTER ENVIRONMENT TEST
- AMBIENT TEMPERATURE :
  - Operating temperature : -55°C to +85°C.

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	Vconn			SBU2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

ITEM	DESCRIPTION	MATERIAL	REMARKS
6	Shrapnel	SUS T=0.10mm	
5	Shell	SUS T=0.15mm	Ovep-plating: Ni
4	Terminal	C7025 T=0.15mm	Ovep-plating: Au Ni/Sn
3	Latch	SUS T=0.4mm	
2	Housing	LCP	UL94-0
1	Housing Stopper	LCP	UL94-0

REVISIONS					UNSPECIFIED TOLERANCES		DSND	DATE	SCALE: N/A	MODEL TYPE:			
ΔX					ANGLAR	±5°	DWN	DATE	VIEW:	3.1 TYPE C			
ΔX					L ≤ 4	±0.2	CHKD	DATE	UNIT: mm/in	PART NO.:			
ΔX					4 < L ≤ 16	±0.3	APPD	DATE	SIZE: A4	DWG NO.:			
MARK	DESCRIPTION	DATE	REVISED	APPROVED	16 < L ≤ 63	±0.4				U261-24XXN-4B0140U			
					L > 63	±0.5				WEIGHT	SHEET	REVISION	
								KKB INDUSTRIAL PRECISION CO., LIMITED			1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)