



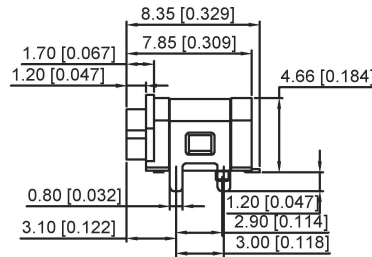


RECOMMENDED P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NOTES:


SPECIFICATION:

- 1.CURRENT RATING: 3.0A MAX
- 2.VOLTAGE:100 VAC
- 3.TEMPERATURE RANGE:-30~85
- 4.CONTACT RESISTANCE:40 MILLIONHM MAX
- 5.INSULATION RESISTANCE:100 MEGOHMS MIN
- 6.INSERTION FORCE: 5N~20N
- 7.UNMATING FORCE: 8N~20N
- 8.DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS:THISPRODUCTIS BASED ON IPX7.



加防水圈示意图

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	防水圈	硅胶	BLACK	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/Ni Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

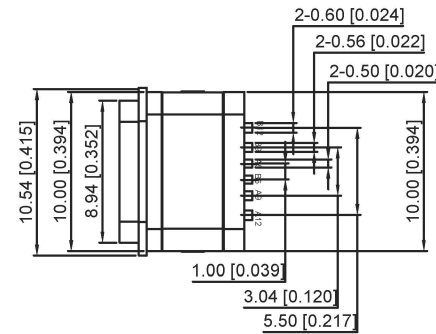

U262-06XN-4BFC10

- 1:0.8u"
- 2:5u"
- 3:10u"
- W:WHITE
- B:BLACK
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

PIN ASSIGNMENT:

PIN NO.	A1&B12	A4&B9	A5	A5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	CC1	CC2	VBUS	GND
P.C.B PAD NO.	C1	C2	C3	C4	C5	C6

广东星坤科技股份有限公司

生效	日期
Δx	
Δx	
Δx	

文件工程章

REVISIONS
www.helloxb.com www.helloxb.com www.helloxb.com

UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: 3.1 TYPE C
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	U262-06XN-4BFC10
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

AUTODESK

AUTODESK

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)