

SPECIFICATION:

1. Material

Housing Material:High temperature thermoplastic
 Contact Terminal:High Grade Copper Alloy
 Merallic Shell:Stainless Steel
 Inner Ground Cover Shell:Stainless Steel
 Mid Plate:Stainless Steel

2. Mechanical:

2.1.Mating force:5-20Nf;
 2.2.Unmating force:Initial:8-20Nf;Final:6-20Nf;
 2.3.Durability:5000 Cycles;

3.Electrical:

3.1.Current Rating:3A
 3.2.Voltage Rating:20V Max.;;
 3.3.Dielectric Withstanding


volage:100Vac,60S,10mA;

3.4.Contact resistance:40m Ohms Max.;;
 3.5.Insulation Resistance:100M Ohms Min.;;

4.Environmental:

4.1.Operating temperature:-40°C~+85°C;
 4.2.Salt Spray Test:24H Min.(No oxidation or rust);

U262-16XN-4BC21665

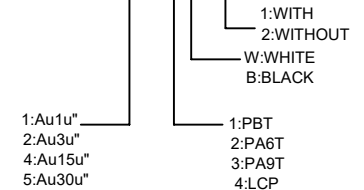

					ANGLAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE:			
					L ≤ 4	±0.2	DWN		DATE		VIEW:	3.1 TYPE C			
					4 < L ≤ 16	±0.3	CHKD		DATE		UNIT: mm/in	PART NO.:			
					16 < L ≤ 63	±0.4	APPD		DATE		SIZE: A4	DWG NO.:			
					L > 63	±0.5						U262-16XN-4BC21665			
REVISIONS					UNSPECIFIED TOLERANCES			XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn													1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)