



| Pin | A | B | C | D |
|-----|-------|-------|------|------|
| 2 | 1.00 | 3.15 | 7.2 | 9.1 |
| 3 | 2.00 | 4.15 | 8.2 | 10.1 |
| 4 | 3.00 | 5.15 | 9.2 | 11.1 |
| 5 | 4.00 | 6.15 | 10.2 | 12.1 |
| 6 | 5.00 | 7.15 | 11.2 | 13.1 |
| 7 | 6.00 | 8.15 | 12.2 | 14.1 |
| 8 | 7.00 | 9.15 | 13.2 | 15.1 |
| 9 | 8.00 | 10.15 | 14.2 | 16.1 |
| 10 | 9.00 | 11.15 | 15.2 | 17.1 |
| 11 | 10.00 | 12.15 | 16.2 | 18.1 |
| 12 | 11.00 | 13.15 | 17.2 | 19.1 |
| 13 | 12.00 | 14.15 | 18.2 | 20.1 |
| 14 | 13.00 | 15.15 | 19.2 | 21.1 |
| 15 | 14.00 | 16.15 | 20.2 | 22.1 |
| 16 | 15.00 | 17.15 | 21.2 | 23.1 |
| 17 | 16.00 | 18.15 | 22.2 | 24.1 |
| 18 | 17.00 | 19.15 | 23.2 | 25.1 |
| 19 | 18.00 | 20.15 | 24.2 | 26.1 |

| Pin | A | B | C | D |
|-----|-------|-------|------|------|
| 20 | 19.00 | 21.15 | 25.2 | 27.1 |
| 21 | 20.00 | 22.15 | 26.2 | 28.1 |
| 22 | 21.00 | 23.15 | 27.2 | 29.1 |
| 23 | 22.00 | 24.15 | 28.2 | 30.1 |
| 24 | 23.00 | 25.15 | 29.2 | 31.1 |
| 25 | 24.00 | 26.15 | 30.2 | 32.1 |
| 26 | 25.00 | 27.15 | 31.2 | 33.1 |
| 27 | 26.00 | 28.15 | 32.2 | 34.1 |
| 28 | 27.00 | 29.15 | 33.2 | 35.1 |
| 29 | 28.00 | 30.15 | 34.2 | 36.1 |
| 30 | 29.00 | 31.15 | 35.2 | 37.1 |
| 31 | 30.00 | 32.15 | 36.2 | 38.1 |
| 32 | 31.00 | 33.15 | 37.2 | 39.1 |
| 33 | 32.00 | 34.15 | 38.2 | 40.1 |
| 34 | 33.00 | 35.15 | 39.2 | 41.1 |
| 35 | 34.00 | 36.15 | 40.2 | 42.1 |

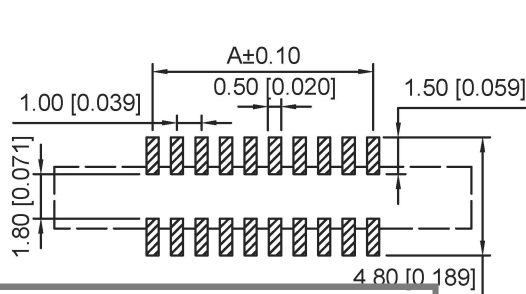

1.FPC NOT MATING CONDITION BANNED CLOSURE
2.PART NO. LEGEND.

X10C25 XX X P
① ② ③

- ① Series Name: X10C25=1.0 mm Pitch(H=2.5mm)
- ② Number of terminals: XX=02-35PIN
- ③ Plating: G:Gold Flash Over Nickel T:Tin Over Nickel

3.PERFORMANCE:

- 3.1: CURRENT RATING:0.5A/PIN
- 3.2: VOLTAGE RATING:50V(AC/DC)
- 3.3: CONTACT RESISTANCE: INITIAL VALUE 30mOHM Max.
- 3.4:INSULATIOM RESISTANCE:500MOHM Min.
- 3.5:DIELERIC WITHSTANDING VOLTAGE:250V AC FOR 1MINUTE
- 3.6:DURABILT: 20 TIMES Min
- 3.7:OPERATING TEMPERATURE:-40~+85℃
OPERATING HUMIDITY RANGE:20% TO 85%

广东星坤科技股份有限公司

生效日期

文件工程章

日期

REVISIONS

www.helloxkb.com www.helloxkb.com www.helloxkb.com

| DSND | DATE | SCALE: N/A | MODEL TYPE: FPC CONNECTOR |
|---------------------------------------|------|-------------|--------------------------------------|
| DWN | DATE | VIEW: | PART NO.: |
| CHKD | DATE | UNIT: mm/in | DWG NO.: |
| APPD | DATE | SIZE: A4 | X10C25XXXP |
| XKB INDUSTRIAL PRECISION CO., LIMITED | | | WEIGHT SHEET REVISION 1.0g 1/1 A0 |

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)