




P.C.B LAYOUT MOUNTING PATTERN

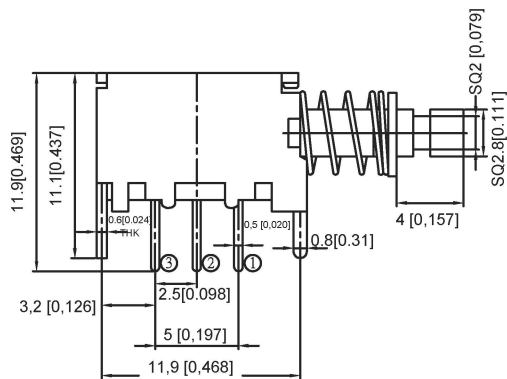

SCHEMATIC (NON-SHORTING)

FEATURES

- Light operating force.
- Long term low contact resistance.
- Momentary or latching operation.
- Short stroke 3.0mm to latch.

SPECIFICATIONS

1.ELECTRICAL

● Contact rating	0.3A, 50VDC
● Contact resistance	50mVMax.
● Insulation resistance	100MVMIn. at 250VDC
● Dielectric strength	250VAC Min. for 60 sec.

2.MECHANICAL AND ENVIRONMENTAL

● Temperature rating	Operating: -15°C to +55°C Storage: -25°C to +65°C
● Operation force	250±80gf
● Stroke	Lock Stroke: 3.0±0.3mm Full Stroke: 3.5±0.3mm
● Operating life	full load: 1x10 ⁴ cycles no load: 1x10 ⁵ cycles

PAPT NO	XKBS12E05-X
OPERATION	W:NO LOCK Z:LOCK

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑦	Bottom plate	—	1	Phenolic Resin	Natural	—
⑥	Contact	—	1	Phosphor bronze	ag Plated	—
⑤	Terminal	—	3	Brass	Plating silvering	—
④	Spring	—	1	Sus	Natural	—
③	Base	—	1	Spcc	Plating Nickel	—
②	Crochet Needle	—	1	Sus	Natural	—
①	Keystake	—	1	Pa66		—

广东星坤科技股份有限公司

生效	日期
ΔX	
ΔX	
ΔX	

文件工程章

REVISIONS	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A	MODEL TYPE: KEY SWITCH	
DWN		DATE		VIEW:	PART NO.:	
CHKD		DATE		UNIT: mm/in	DWG NO.:	
APPD		DATE		SIZE: A4	XKBS12E05-X	
XKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT	SHEET	REVISION
				1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)