

DATA SHEET

SURFACE-MOUNT CERAMIC MULTILAYER CAPACITORS

01005

NP0/X5R/X7R

4 V TO 25 V

0.5 pF to 470 nF

RoHS compliant & Halogen Free



SCOPE

This specification describes 01005 NP0/X5R series chip capacitors with lead-free terminations.

APPLICATIONS

- Mobile
- Module

FEATURES

- Supplied in tape on reel
- Nickel-barrier end termination
- RoHS compliant
- Halogen Free compliant

ORDERING INFORMATION - GLOBAL PART NUMBER, PHYCOMP CTC & I2NC

All part numbers are identified by the series, size, tolerance, TC material, packing style, voltage, process code, termination and capacitance value.

YAGEO BRAND ordering code

GLOBAL PART NUMBER (PREFERRED)

CC XXXX X X XXX X **B** X XXX
 (1) (2) (3) (4) (5) (6) (7)

(1) SIZE – INCH BASED (METRIC)

0100(0402)

(2) TOLERANCE

- B = ±0.1pF
- C = ±0.25pF
- D = ±0.5pF
- J = ±5%
- K = ±10%
- M = ±20%

(3) PACKING STYLE

R = Paper/PE taping reel; Reel 7 inch

(4) TC MATERIAL

- NPO
- X5R
- X7R

(5) RATED VOLTAGE

- 4 = 4 V
- 5 = 6.3V
- 6 = 10 V
- 7 = 16 V
- 8 = 25 V

(6) PROCESS

- N = NPO
- B = Class 2 MLCC

(7) CAPACITANCE VALUE

2 significant digits+number of zeros
 The 3rd digit signifies the multiplying factor, and letter R is decimal point
 Example: 121 = 12 × 10¹ = 120 pF

CONSTRUCTION

The capacitor consists of a rectangular block of ceramic dielectric in which a number of interleaved metal electrodes are contained. This structure gives rise to a high capacitance per unit volume.

The inner electrodes are connected to the two end terminations and finally covered with a layer of plated tin (NiSn). The terminations are lead-free. A cross section of the structure is shown in Fig.1.

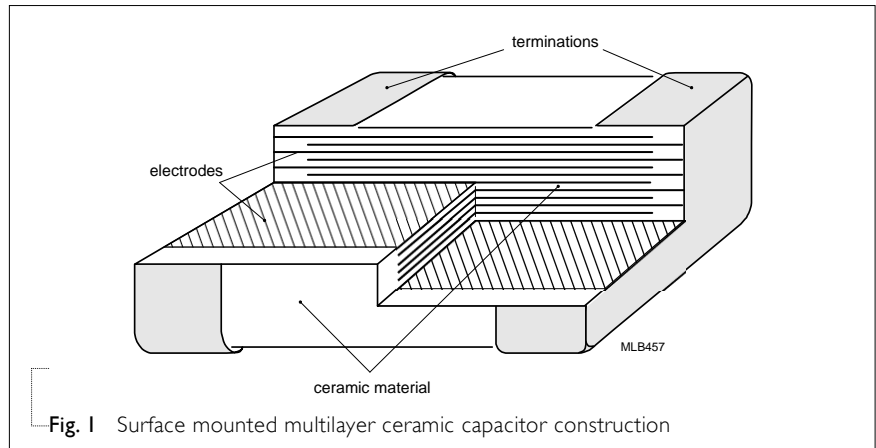


Fig. 1 Surface mounted multilayer ceramic capacitor construction

DIMENSION

Table I For outlines see fig. 2

TYPE	L ₁ (mm)	W (mm)	T (mm)	L ₂ / L ₃ (mm)		L ₄ (mm)
				min.	max.	min.
01005	0.4 ±0.02	0.2 ±0.02	0.2 ±0.02	0.07	0.14	0.13

OUTLINES

For dimension see Table I

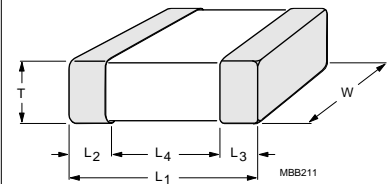


Fig. 2 Surface mounted multilayer ceramic capacitor dimension

CAPACITANCE RANGE & THICKNESS

CAP.			NP0		CAP.				X5R	CAP.			X7R
16 V / 25 V			50 V	4V	6.3V	10V	16V		6.3V / 10V		16V		
0.1 pF	0.2±0.02	0.2±0.02	100 pF	0.2±0.02	0.2±0.02	0.2±0.02	0.2±0.02	100 pF	0.2±0.02	0.2±0.02	0.2±0.02		
0.2 pF	0.2±0.02	0.2±0.02	150 pF	0.2±0.02	0.2±0.02	0.2±0.02	0.2±0.02	150 pF	0.2±0.02	0.2±0.02	0.2±0.02		
0.3 pF	0.2±0.02	0.2±0.02	220 pF	0.2±0.02	0.2±0.02	0.2±0.02	0.2±0.02	220 pF	0.2±0.02	0.2±0.02	0.2±0.02		
0.4 pF	0.2±0.02	0.2±0.02	330 pF	0.2±0.02	0.2±0.02	0.2±0.02	0.2±0.02	330 pF	0.2±0.02	0.2±0.02	0.2±0.02		
0.5 pF	0.2±0.02	0.2±0.02	470 pF	0.2±0.02	0.2±0.02	0.2±0.02	0.2±0.02	470 pF	0.2±0.02	0.2±0.02	0.2±0.02		
0.6 pF	0.2±0.02	0.2±0.02	680 pF	0.2±0.02	0.2±0.02	0.2±0.02	0.2±0.02	680 pF	0.2±0.02	0.2±0.02	0.2±0.02		
0.7 pF	0.2±0.02	0.2±0.02	1 000 pF	0.2±0.02	0.2±0.02	0.2±0.02	0.2±0.02	1 000 pF	0.2±0.02	0.2±0.02	0.2±0.02		
0.75 pF	0.2±0.02	0.2±0.02	2.2 nF	0.2±0.02	0.2±0.02	0.2±0.02		2.2 nF					
0.8 pF	0.2±0.02	0.2±0.02	4.7 nF	0.2±0.02	0.2±0.02	0.2±0.02		4.7 nF					
0.9 pF	0.2±0.02	0.2±0.02	10 nF	0.2±0.02	0.2±0.02	0.2±0.02		10 nF					
1.0 pF	0.2±0.02	0.2±0.02	22nF	0.2±0.02	0.2±0.02			22nF					
1.2 pF	0.2±0.02	0.2±0.02	47 nF	0.2±0.02	0.2±0.02			47 nF					
1.5 pF	0.2±0.02	0.2±0.02	100 nF	0.2±0.02	0.2±0.02	0.2±0.02		100 nF					
1.8 pF	0.2±0.02	0.2±0.02	220 nF	0.2±0.02	0.2±0.02			220 nF					
2.2 pF	0.2±0.02	0.2±0.02	Tape width		8 mm			Tape width		8 mm			
2.7 pF	0.2±0.02	0.2±0.02											
3.3 pF	0.2±0.02	0.2±0.02											
3.9 pF	0.2±0.02	0.2±0.02											
4.7 pF	0.2±0.02	0.2±0.02											
5.6 pF	0.2±0.02	0.2±0.02											
6.8 pF	0.2±0.02	0.2±0.02											
8.2 pF	0.2±0.02	0.2±0.02											
10 pF	0.2±0.02	0.2±0.02											
12 pF	0.2±0.02	0.2±0.02											
15 pF	0.2±0.02	0.2±0.02											
18 pF	0.2±0.02	0.2±0.02											
22 pF	0.2±0.02	0.2±0.02											
27 pF	0.2±0.02	0.2±0.02											
33 pF	0.2±0.02	0.2±0.02											
39 pF	0.2±0.02												
47 pF	0.2±0.02												
56 pF	0.2±0.02												
68 pF	0.2±0.02												
82 pF	0.2±0.02												
100 pF	0.2±0.02												
Tape width			8 mm										

THICKNESS CLASSES AND PACKING QUANTITY

Table 3

SIZE CODE	THICKNESS CLASSIFICATION	TAPE WIDTH QUANTITY PER REEL	Ø180 MM / 7 INCH		Ø330 MM / 13 INCH		QUANTITY PER BULK CASE
			Paper/PE	Blister	Paper/	Blister	
01005	0.2 ±0.02 mm	8 mm	20,000	---	---	---	---

ELECTRICAL CHARACTERISTICS

NP0/X5R DIELECTRIC CAPACITORS; NISN TERMINATIONS

Unless otherwise specified, all test and measurements shall be made under standard atmospheric conditions for testing as given in 5.3 of IEC 60068-1:

- Temperature: 15 °C to 35 °C
- Relative humidity: 25% to 75%
- Air pressure: 86 kPa to 106 kPa

Before the measurements are made, the capacitor shall be stored at the measuring temperature for a time sufficient to allow the entire capacitor to reach this temperature.

The period as prescribed for recovery at the end of a test is normally sufficient for this purpose.

Table 4

DESCRIPTION		VALUE
Capacitance range		0.5 pF to 470 nF
Capacitance tolerance		
	C < 10 pF	±0.1pF, ±0.25pF, ±0.5pF
NP0	C ≥ 10 pF	±5%, ±10%
X5R / X7R		±10%, ±20%
Dissipation factor (D.F.)		
NP0	C < 30 pF	≤ 1 / (400 + 20C)
	C ≥ 30 pF	≤ 0.1 %
X5R / X7R		≤ 10 %
Insulation resistance after 1 minute at U _r (DC)		R _{ins} ≥ 10 GΩ or R _{ins} × C ≥ 500Ω · F whichever is less X5R/X7R > 10nF: R _{ins} × C ≥ 50Ω · F
Maximum capacitance change as a function of temperature (temperature characteristic/coefficient):		
NP0		±30 ppm/°C
X5R / X7R		±15%
Operating temperature range:		
NP0		-55 °C to +125 °C
X5R		-55 °C to +85 °C
X7R		-55 °C to +125 °C

SOLDERING RECOMMENDATION

Table 5

SOLDERING METHOD	SIZE 01005
Reflow	Reflow only
Reflow/Wave	---

TESTS AND REQUIREMENTS

Table 6 Test procedures and requirements

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Mounting	IEC 60384-21/22 4.3	The capacitors may be mounted on printed-circuit boards or ceramic substrates	No visible damage
Visual Inspection and Dimension Check	4.4	Any applicable method using × 10 magnification	In accordance with specification
Capacitance	4.5.1	<p>Class 1: f = 1 MHz for C ≤ 1 nF, measuring at voltage 1 V_{rms} at 20 °C f = 1 KHz for C > 1 nF, measuring at voltage 1 V_{rms} at 20 °C</p> <p>Class 2: C ≤ 1 nF f = 1 KHz, measuring at voltage 1 V_{rms} at 20 °C</p> <p>C > 1 nF f = 1 KHz, rated voltage ≤ 6.3 V, measuring at voltage 0.5 V_{rms} at 20 °C f = 1 KHz, rated voltage > 10 V, measuring at voltage 1 V_{rms} at 20 °C</p>	Within specified tolerance
Dissipation Factor (D.F.)	4.5.2	<p>Class 1: f = 1 MHz for C ≤ 1 nF, measuring at voltage 1 V_{rms} at 20 °C f = 1 KHz for C > 1 nF, measuring at voltage 1 V_{rms} at 20 °C</p> <p>Class 2: C ≤ 1 nF f = 1 KHz, measuring at voltage 1 V_{rms} at 20 °C</p> <p>C > 1 nF f = 1 KHz, rated voltage ≤ 6.3 V, measuring at voltage 0.5 V_{rms} at 20 °C f = 1 KHz, rated voltage > 10 V, measuring at voltage 1 V_{rms} at 20 °C</p>	In accordance with specification
Insulation Resistance	4.5.3	At Ur (DC) for 1 minute	In accordance with specification

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS									
Temperature coefficient	4.6	Capacitance shall be measured by the steps shown in the following table. The capacitance change should be measured after 5 min at each specified temperature stage.	$\Delta C/C$ Class I (NP0): $\pm 30\text{ppm}$ Class 2: (X7R/X5R): $\pm 15\%$ In case of applying voltage, the capacitance change should be measured after 1 more min. with applying voltage in equilibration of each temp. stage. CC0100MRX5R4(5)BB104(224): $0.2V \pm 0.1V_{rms}$									
		<table border="1"> <thead> <tr> <th>Step</th> <th>Temperature(°C)</th> </tr> </thead> <tbody> <tr> <td>a</td> <td>25±2</td> </tr> <tr> <td>b</td> <td>Lower temperature±3°C</td> </tr> <tr> <td>c</td> <td>25±2</td> </tr> <tr> <td>d</td> <td>Upper Temperature±2°C</td> </tr> <tr> <td>e</td> <td>25±2</td> </tr> </tbody> </table> <p>(1) Class I Temperature Coefficient shall be calculated from the formula as below $\text{Temp. Coefficient} = \frac{C2 - C1}{C1 \times \Delta T} \times 10^6 \text{ [ppm/°C]}$ C1: Capacitance at step c C2: Capacitance at 125°C $\Delta T: 100\text{°C}(=125\text{°C}-25\text{°C})$ Measuring Voltage: 0.5 to 5 Vrms</p> <p>(2) Class II Capacitance Change shall be calculated from the formula as below $\Delta C = \frac{C2 - C1}{C1} \times 100\%$ C1: Capacitance at step c C2: Capacitance at step b or d</p>		Step	Temperature(°C)	a	25±2	b	Lower temperature±3°C	c	25±2	d
Step	Temperature(°C)											
a	25±2											
b	Lower temperature±3°C											
c	25±2											
d	Upper Temperature±2°C											
e	25±2											
Adhesion	IEC 60384-21/22	4.7 A force applied for 10 seconds to the line joining the terminations and in a plane parallel to the substrate	Force size 01005 : 1N									
Bending Strength		4.8 Mounting in accordance with IEC 60384-22 paragraph 4.3 Conditions: bending 1 mm at a rate of 1 mm/s, radius jig 5 mm	No visible damage <hr/> $\Delta C/C$ Class I (NP0): within $\pm 1\%$ or 0.5 pF, whichever is greater Class2 (X5R/X7R): $\pm 10\%$									

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Resistance to Soldering Heat	4.9	Precondition: 150 +0/-10 °C for 1 hour, then keep for 24 ±1 hours at room temperature	Dissolution of the end face plating shall not exceed 25% of the length of the edge concerned
		Preheating: 120 °C to 150 °C for 1 minute and 170 °C to 200 °C for 1 minute. Solder bath temperature: 260 ±5 °C Dipping time: 10 ±0.5 seconds Recovery time: 24 ±2 hours	$\Delta C/C$ Class I (NP0): within ±0.5% or 0.5 pF, whichever is greater Class2 (X5R/X7R): ±10% D.F. within initial specified value R _{ins} within initial specified value
Solderability	4.10	Preheated the temperature of 80 °C to 140 °C and maintained for 30 seconds to 60 seconds.	The solder should cover over 95% of the critical area of each termination
		Test conditions for leadfree containing solder alloy Temperature: 245 ±5 °C Dipping time: 3 ±0.3 seconds Depth of immersion: 10 mm	
Rapid Change of Temperature	IEC 60384-21/22 4.11	Preconditioning; 150 +0/-10 °C for 1 hour, then keep for 24 ±1 hours at room temperature	No visual damage
		5 cycles with following detail: 30 minutes at lower category temperature 30 minutes at upper category temperature Recovery time 24 ±2 hours	$\Delta C/C$ Class I (NP0): within ±2.5% or 0.25 pF, whichever is greater Class2 (X5R/X7R): ±15% D.F. meet initial specified value R _{ins} meet initial specified value

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Damp Heat	with Ur load	4.13 1. Preconditioning, class 2 only: 150 +0/-10 °C /1 hour, then keep for 24 ± 1 hour at room temp 2. Initial measure: Spec: refer initial spec C, D, IR 3. Damp heat test: 500 ± 12 hours at 40 ± 2 °C; 90 to 95% R.H; 1.0 Ur applied. 4. Recovery: Class 1: 6 to 24 hours Class 2: 24 ± 2 hours 5. Final measure: C, D, IR P.S. If the capacitance value is less than the minimum value permitted, then after the other measurements have been made the capacitor shall be precondition according to "IEC 60384 4.1" and then the requirement shall be met.	No visual damage after recovery <hr/> Class 1 (NP0): $\Delta C/C$ within ±7.5% or 0.75 pF, whichever is greater D.F. $\leq 2 \times$ specified value I.R. $\geq 2,500 \text{ M}\Omega$ or $R_{ins} \times Cr \geq 25\Omega \cdot F$ whichever is less Class2 (X5R/X7R): $C \leq 1nF$ $\Delta C/C$ $\pm 15\%$ D.F. $\leq 10\%$ I.R. $\geq 500 \text{ M}\Omega$ $10nF \geq C > 1nF$ $\Delta C/C$ $\pm 20\%$ D.F. $\leq 10\%$ I.R. $\geq 500 \text{ M}\Omega$ $C > 10nF$ $\Delta C/C$ $\pm 25\%$ D.F. $\leq 20\%$ I.R. $R_{ins} \times Cr \geq 5\Omega \cdot F$

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Endurance	IEC 60384-21/22 4.14	<ol style="list-style-type: none"> Preconditioning, class 2 only: 150 +0/-10 °C /1 hour, then keep for 24 ±1 hour at room temp Initial measure: Spec: refer initial spec C, D, IR Endurance test: Temperature: NP0: 125 °C Specified stress voltage applied for 1,000 hours: Applied 2.0 × U_r for general product Temperature: X5R: 85°C, X7R: 125°C Specified stress voltage applied for 1,000 hours: Applied 1.5 × U_r for general product Recovery time: 24 ±2 hours Final measure: C, D, IR <p>P.S. If the capacitance value is less than the minimum value permitted, then after the other measurements have been made the capacitor shall be precondition according to "IEC 60384 4.1" and then the requirement shall be met.</p>	<p>No visual damage</p> <hr/> <p>Class 1 (NP0): $\Delta C/C$ within ±3% or 0.3 pF, whichever is greater D.F. $\leq 2 \times$ specified value I.R. $\geq 4,000 \text{ M}\Omega$ or $R_{ins} \times Cr \geq 40\Omega \cdot F$ whichever is less</p> <p>Class2 (X5R/X7R): $C \leq 1nF$ $\Delta C/C$ $\pm 15\%$ D.F. $\leq 10\%$ I.R. $\geq 1G\Omega$</p> <p>$10nF \geq C > 1nF$ $\Delta C/C$ $\pm 15\%$ D.F. $\leq 10\%$ I.R. $\geq 1G\Omega$</p> <p>$C > 10nF$ $\Delta C/C$ $\pm 25\%$ D.F. $\leq 20\%$ I.R. $R_{ins} \times Cr \geq 10\Omega \cdot F$</p>
Voltage Proof	IEC 60384-1 4.5.4	<p>Specified stress voltage applied for 1~5 seconds $U_r \leq 100 \text{ V}$: series applied 2.5 U_r Charge/Discharge current is less than 50 mA</p>	No breakdown or flashover

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 12	Nov. 28, 2022	-	- Change Range
Version 11	Apr. 13, 2022	-	- Change Range
Version 10	May 5, 2017	-	- Rated voltage of NPO series extend to 25 V - Add X5R, 470nF, 4V to 6.3V and 100nF, 10V
Version 9	Jan. 17, 2017	-	- Test condition updated
Version 8	Jan. 12, 2016	-	- Capacitance range & thickness update
Version 7	Oct. 31, 2015	-	- Capacitance range & thickness update
Version 6	Jun. 29, 2015	-	- Test procedures and requirements
Version 5	Jun. 06, 2013	-	- Test procedures and requirements
Version 4	Mar. 27, 2013	-	- Change Tolerance
Version 3	Jan. 15, 2013	-	- Change Range
Version 2	Oct. 23, 2012	-	- Change Range
Version 1	July 03, 2012	-	- Change Range
Version 0	Apr 16, 2012	-	- New

Surface-Mount Ceramic Multilayer Capacitors

LEGAL DISCLAIMER

YAGEO, its distributors and agents (collectively, "YAGEO"), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. YAGEO may make changes, modifications and/or improvements to product related information at any time and without notice.

YAGEO makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, YAGEO disclaims (i) any and all liability arising out of the application or use of any YAGEO product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

YAGEO products are designed for general purpose applications under normal operation and usage conditions. Please contact YAGEO for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property: Aerospace equipment (artificial satellite, rocket, etc.), Atomic energy-related equipment, Aviation equipment, Disaster prevention equipment, crime prevention equipment, Electric heating apparatus, burning equipment, Highly public information network equipment, data-processing equipment, Medical devices, Military equipment, Power generation control equipment, Safety equipment, Traffic signal equipment, Transportation equipment and Undersea equipment, or for any other application or use in which the failure of YAGEO products could result in personal injury or death, or serious property damage. Particularly **YAGEO Corporation and its affiliates do not recommend the use of commercial, automotive, and/or COTS grade products for high reliability applications or manned space flight.**

Information provided here is intended to indicate product specifications only. YAGEO reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by PCN.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Yageo\(国巨\)](#)