

Surface Mount Schottky Barrier Rectifier
Reverse Voltage - 20 to 200 V
Forward Current - 5 A
FEATURES


- ◆ Metal silicon junction, majority carrier conduction
- ◆ For surface mounted applications
- ◆ Low power loss, high efficiency
- ◆ High forward surge current capability
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- ◆ Case: DO-214AB/SMC
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 0.22g / 0.0077oz

Absolute Maximum Ratings and Electrical characteristics

Ratings at 25 ° ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

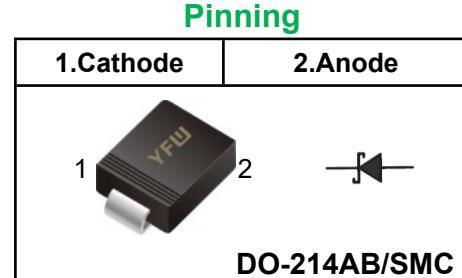

Marking Code	
SS52C	SS52
SS54C	SS54
SS56C	SS56
SS58C	SS58
SS510C	SS510
SS512C	SS512
SS515C	SS515
SS520C	SS520

Parameter	Symbols	SS52C	SS54C	SS56C	SS58C	SS510C	SS512C	SS515C	SS520C	Units		
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	V		
Maximum RMS voltage	V_{RMS}	14	28	42	56	70	84	105	140	V		
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200	V		
Maximum Average Forward Rectified Current	$I_{F(AV)}$	5.0							A			
Peak Forward Surge Current, 8.3ms Single Half Sine-Wave Superimposed On Rated Load (JEDEC method)	I_{FSM}	175				150						
Maximum Instantaneous Forward Voltage at 5 A	V_F	0.55		0.70		0.85						
Maximum Instantaneous Reverse Current $T_A = 25^\circ C$ at Rated DC Reverse Voltage $T_A = 100^\circ C$	I_R	1.0 50							mA			
Typical Junction Capacitance ⁽¹⁾	C_J	600		400								
Typical Thermal Resistance ⁽²⁾	$R_{\theta JA}$	35							°C/W			
Operating Junction Temperature Range	T_J	-55 ~ +150							°C			
Storage Temperature Range	T_{stg}	-55 ~ +150							°C			

(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C.

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

Fig.1 Forward Current Derating Curve

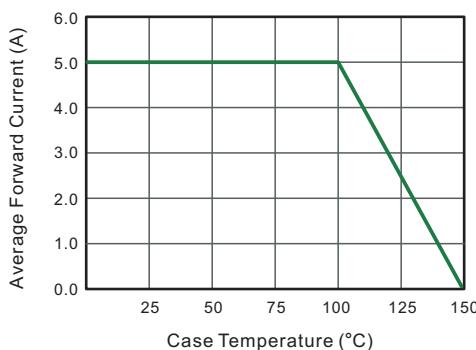


Fig.2 Typical Reverse Characteristics

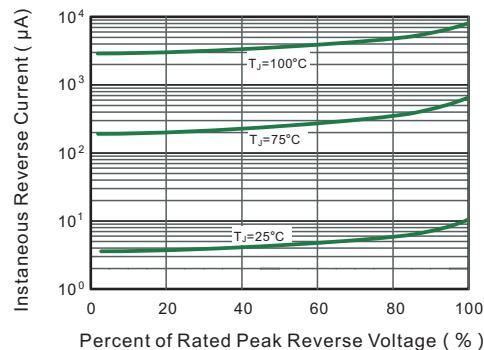


Fig.3 Typical Forward Characteristic

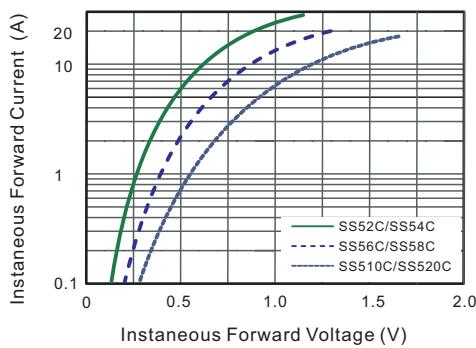


Fig.4 Typical Junction Capacitance

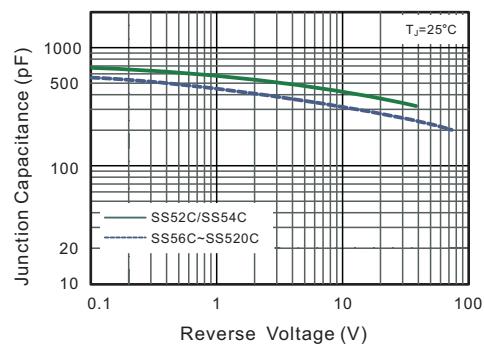


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current




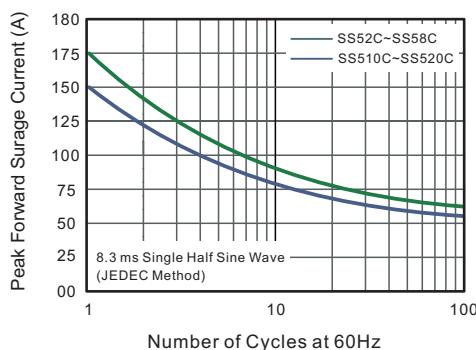


Fig.6- Typical Transient Thermal Impedance

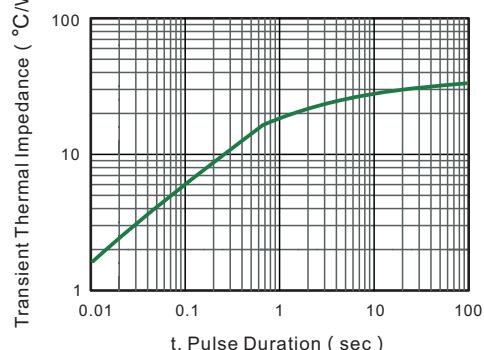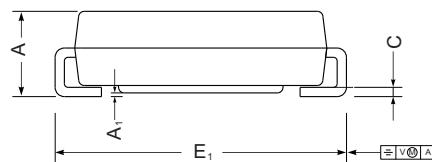


Package Outline
DO-214AB SMC

Plastic surface mounted package; 2leads

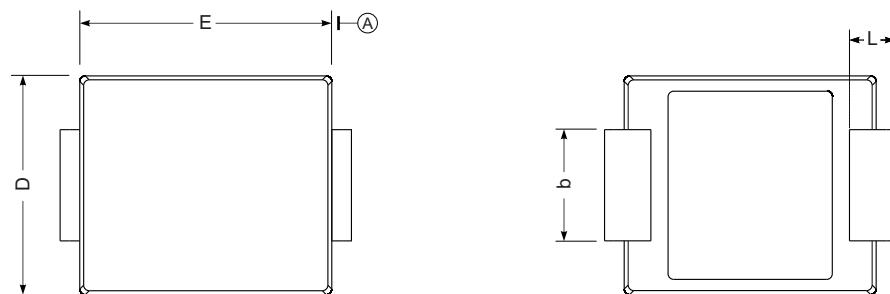

UNIT		A	E	D	E ₁	A ₁	C	L	b
mm	max	2.62	7.0	6.2	8.0	0.21	0.31	1.6	3.25
	min	2.00	6.5	5.6	7.6	0.05	0.15	0.9	2.75
mil	max	103	276	244	315	8.3	12	63	128
	min	79	256	220	299	2.0	5.9	35	108

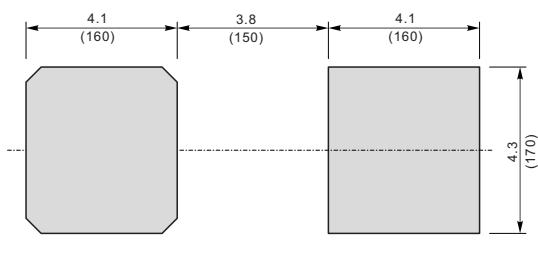The recommended mounting pad size

 Unit : $\frac{\text{mm}}{(\text{mil})}$
Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
DO-214AB SMC	Tape/Reel,13"reel	3000	EIA-481-1

单击下面可查看定价，库存，交付和生命周期等信息

[>>YFW\(佑风微\)](#)