



# SR220 THRU SR2200

## SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts Forward Current - 2.0 Ampere


### FEATURES

The plastic package carries Underwriters Laboratory  
 Flammability Classification 94V-0  
 Metal silicon junction, majority carrier conduction  
 Low power loss, high efficiency  
 High forward surge current capability  
 High temperature soldering guaranteed:  
 260°C/10 seconds, 0.375" (9.5mm) lead length,  
 5 lbs. (2.3kg) tension

### MECHANICAL DATA

**Case:** JEDEC DO-15 molded plastic body  
**Terminals:** Plated axial leads, solderable per MIL-STD-750,  
 Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.014 ounce, 0.40 grams

### DO-15

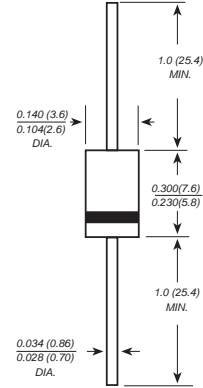

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


	SYMBOLS	SR 220	SR 230	SR 240	SR 250	SR 260	SR 270	SR 280	SR 290	SR 2100	SR 2150	SR 2200	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	70	80	90	100	150	200	V
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	49	56	63	70	105	140	V
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	70	80	90	100	100	200	V
Maximum average forward rectified current 0.375" (9.5mm) lead length (see fig. 1)	$I_{(AV)}$	2.0											A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	60.0											A
Maximum instantaneous forward voltage at 2.0A	$V_F$	0.55			0.70			0.85			0.95		V
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	$I_R$	0.5					5.0					0.2 2.0	mA
Typical junction capacitance (NOTE 1)	$C_J$	220					80					pF	
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	50.0											°C/W
Operating junction temperature range	$T_J$	-55 to +125					-55 to +150					°C	
Storage temperature range	$T_{STG}$	-55 to +150											°C

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.  
 2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted




# RATINGS AND CHARACTERISTIC CURVES SR220 THRU SR2200


AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

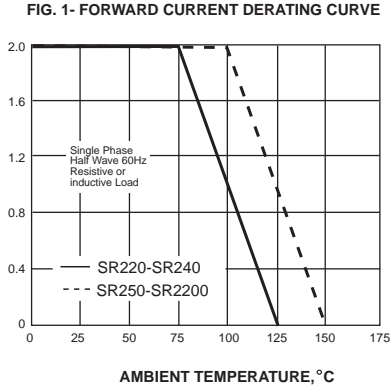


PEAK FORWARD SURGE CURRENT, AMPERES

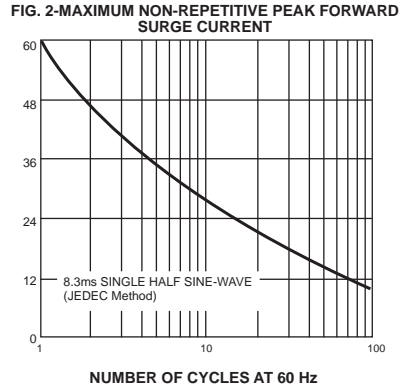


INSTANTANEOUS FORWARD CURRENT, AMPERES

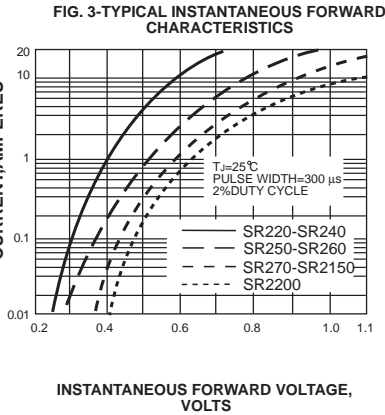


INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

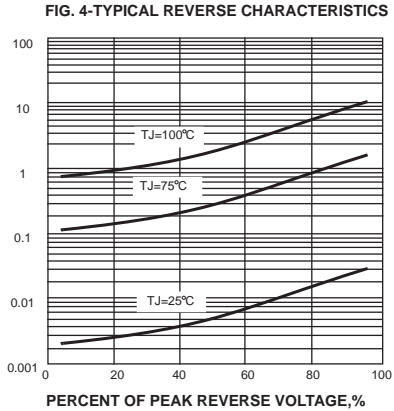

JUNCTION CAPACITANCE, pF

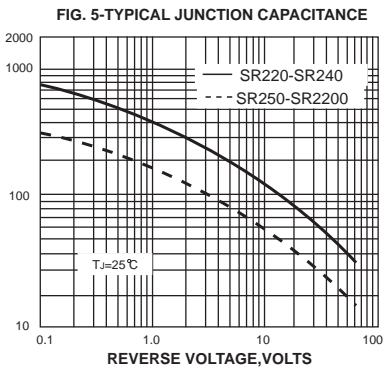

TRANSIENT THERMAL IMPEDANCE, °C/W

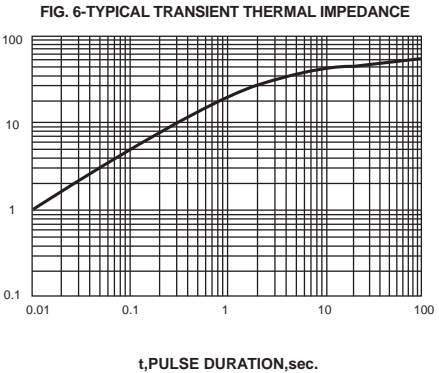

单击下面可查看定价，库存，交付和生命周期等信息

[>>ZG\(中鑫半导体\)](#)