


KEMET Part Number: 100HV36N222JN **Not for New Design**
(100HV36N222J)

HV RAD-LDD Indust C0G HV, Ceramic, 2200 pF, 5%, 10000 VDC, C0G, Commercial, High Voltage, Lead Spacing = 34.92mm

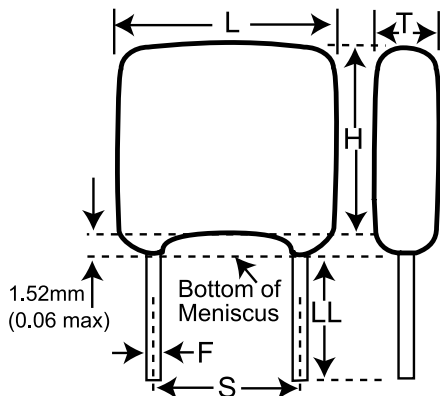

Dimensions

Parameter	Value
L	36.83mm MAX
H	18.29mm MAX
T	6.86mm MAX
S	34.92mm +/-0.76mm
LL	31.75mm MIN
F	0.635mm +0.102/-0.051mm

Packaging Specifications

Packaging:	Bulk, Bag
Packaging Quantity:	1

General Information

Series:	HV RAD-LDD Indust C0G HV
Style:	Radial
Description:	Commercial, High Voltage
Features:	Commercial
RoHS:	Yes
Termination:	Nickel
Failure Rate:	N/A
AEC-Q200:	No

Specifications

Capacitance:	2200 pF
Capacitance Tolerance:	5%
Voltage DC:	10000 VDC
Dielectric Withstanding Voltage:	15000 VDC
Temperature Range:	-55/+125°C
Temperature Coefficient:	C0G
Dissipation Factor:	0.15%
Insulation Resistance:	100 GOhms

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET Electronics\(基美\)](#)