


HTHP LDD Indust COG HT200C, Ceramic, 10 pF, 10%, 50 VDC, COG, Commercial, High Temperature, Lead Spacing = 5.08mm

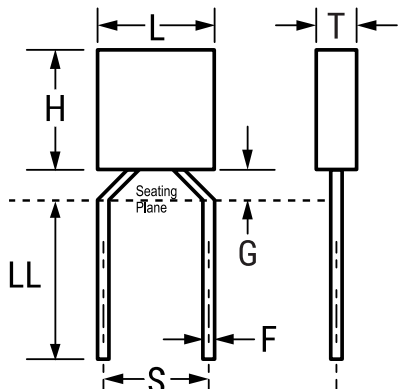

Dimensions

L	5.08mm MAX
H	5.08mm MAX
T	2.54mm MAX
S	5.08mm +/-0.76mm
LL	31.75mm MIN
F	0.635mm NOM
G	1.65mm MAX

Packaging Specifications

Packaging:	Bulk, Bag
Packaging Quantity:	1

General Information

Series:	HTHP LDD Indust COG HT200C
Style:	Radial
Description:	Commercial, High Temperature
Features:	Commercial
RoHS:	No
Prop 65:	WARNING: Cancer and reproductive harm - www.p65warnings.ca.gov .
REACH:	SVHC (Pb – CAS 7439-92-1)
Termination:	Lead (SnPb)
Failure Rate:	N/A
AEC-Q200:	No

Specifications

Capacitance:	10 pF
Capacitance Tolerance:	10%
Voltage DC:	50 VDC
Dielectric Withstanding Voltage:	125 VDC
Temperature Range:	-55/+200°C
Temperature Coefficient:	COG
Dissipation Factor:	0.15%
Insulation Resistance:	100 GOhms

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET Electronics\(基美\)](#)