


**KEMET Part Number: T340E157M016AS7301** Not for New Design  
(T340E157M016ASTR)

T340, Tantalum, MnO2 Tantalum, Commercial Grade, 150 uF, 20%, 16 VDC, Lead Spacing = 10mm

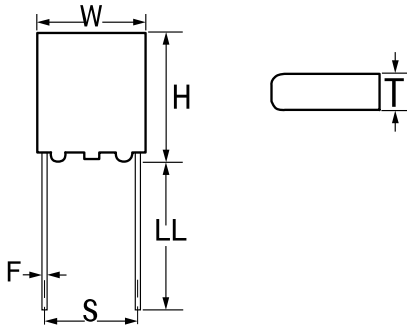

Dimensions	
W	12.3mm MAX
H	10.5mm MAX
T	12.3mm MAX
S	10mm +/-0.5mm
LL	15mm +/-2mm
F	0.64mm +/-0.03mm

Packaging Specifications	
Packaging:	T&R, 305mm
Packaging Quantity:	150

General Information	
Series:	T340
Dielectric:	MnO2 Tantalum
Style:	Radial Molded
Description:	Radial, Solid Tantalum, Molded
RoHS:	No
Prop 65:	<b>WARNING:</b> Cancer and reproductive harm - <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a> .
REACH:	SVHC (Pb – CAS 7439-92-1)
Termination:	Lead (SnPb)
Construction:	Molded
Miscellaneous:	Includes Standoff Height of 0.38 +/- 0.13mm
Notes:	Longest Lead Is Positive

Specifications	
Capacitance:	150 uF
Capacitance Tolerance:	20%
Voltage DC:	16 VDC (85C), 10 VDC (125C), 0.16 VDC (125C Reverse)
Temperature Range:	-55/+125C
Dissipation Factor:	6.00%
Leakage Current:	10 uA

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET Electronics\(基美\)](#)