


HV RAD-LDD Indust X7R HVHT200C, Ceramic, 680 pF, 10%, 1000 VDC, X7R, Commercial, High Temperature, High Voltage, Lead Spacing = 4.32mm

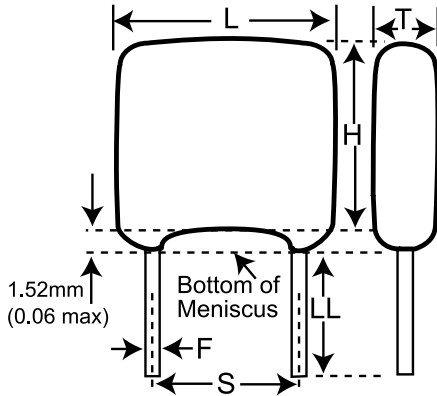

Dimensions	
L	6.35mm MAX
H	5.59mm MAX
T	3.81mm MAX
S	4.32mm +/-0.76mm

Packaging Specifications	
Packaging:	Bulk, Bag
Packaging Quantity:	1

General Information	
Series:	HV RAD-LDD Indust X7R HVHT200C
Style:	Radial
Description:	Commercial, High Temperature, High Voltage
Features:	Commercial
RoHS:	No
Prop 65:	⚠ WARNING: Cancer and reproductive harm - www.p65warnings.ca.gov .
REACH:	SVHC (Pb – CAS 7439-92-1)
Termination:	Lead (SnPb)
Failure Rate:	N/A
Testing and Reliability:	MIL-PRF-49467 Group A
Qualifications:	MIL-PRF-49467 Group A
AEC-Q200:	No

Specifications	
Capacitance:	680 pF
Capacitance Tolerance:	10%
Voltage DC:	1000 VDC
Dielectric Withstanding Voltage:	1500 VDC
Temperature Range:	-55/+200°C
Temperature Coefficient:	X7R
Dissipation Factor:	2.50%
Insulation Resistance:	100 GOhms

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET Electronics\(基美\)](#)