


KEMET Part Number: MMC5.7184K50J35TR12
(F160PU184K050V)

MMC/F160, Film, Metallized Polyester, General Purpose, 0.18 uF, 10%, 30 VAC, 50 VDC, 100°C, 2220, 4mm

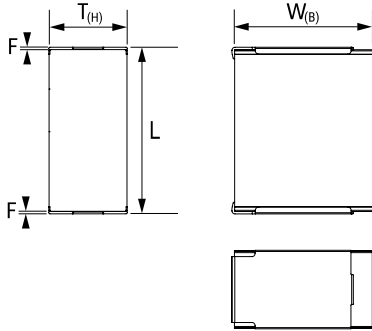

Note: '()' correspond to the letters used in the product bulletin

Dimensions	
Chip Size	2220
L	5.7mm +/-0.2mm
W	5mm +/-0.2mm
T	4mm +/-0.2mm
F	0.5mm NOM

Packaging Specifications	
Packaging:	T&R
Packaging Quantity:	2100

General Information	
Series:	MMC/F160
Dielectric:	Metallized Polyester
Style:	SMD Chip
RoHS:	Yes
Miscellaneous:	Not For New Design. Use F161PU184K050V (Series F161)

Specifications	
Capacitance:	0.18 uF
Capacitance Tolerance:	10%
Voltage AC:	30 VAC
Voltage DC:	50 VDC
Temperature Range:	-55/+100C
Rated Temperature:	100°C
Dissipation Factor:	0.80% 1kHz, 1.20% 10kHz, 3.00% 100kHz
Insulation Resistance:	15 GOhms
Max dV/dt:	20 V/us

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET Electronics\(基美\)](#)