


KEMET Part Number: T398B475M016AS7301 Not for New Design
(T398B475M016ASTR)

T398, Tantalum, MnO2 Tantalum, Commercial Grade, 4.7 uF, 20%, 16 VDC, Radial, Solid Tantalum, Three Leaded, Lead Spacing = 2.54mm

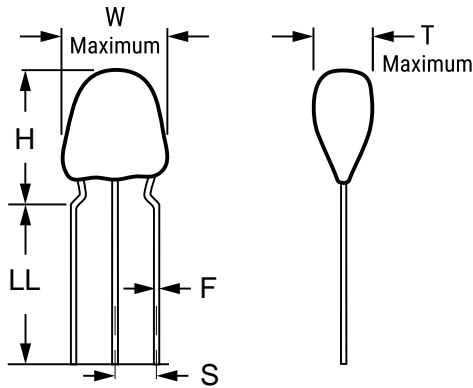

Dimensions	
W	7.1mm
H	9.3mm
T	4.8mm
S	2.54mm +/-0.2mm
LL	4.75mm +/-1.27mm
F	0.5mm +/-0.05mm

Packaging Specifications	
Packaging:	T&R, 305mm
Packaging Quantity:	1500

General Information	
Series:	T398
Dielectric:	MnO2 Tantalum
Style:	Radial Three Lead
Description:	Radial, Solid Tantalum, Three Leaded
RoHS:	No
Prop 65:	WARNING: Cancer and reproductive harm - www.p65warnings.ca.gov .
REACH:	SVHC (Pb - CAS 7439-92-1)
Termination:	Lead (SnPb)
Construction:	Conformal
Notes:	Longest Lead Is Positive

Specifications	
Capacitance:	4.7 uF
Capacitance Tolerance:	20%
Voltage DC:	16 VDC (85C), 10 VDC (125C), 0.16 VDC (125C Reverse)
Temperature Range:	-55/+125C
Dissipation Factor:	5.00%
Leakage Current:	0.6 uA

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET Electronics\(基美\)](#)