


KEMET Part Number: ERK610Z101KYCR
(C811YC101K440X, ERK610RK3100KYCR)

ERK610 SFTY X1-440 Y2-300, Ceramic, 100 pF, 10%, 440 VAC (X1), 300 VAC (Y2), Y5S, Lead Spacing = 7.5mm

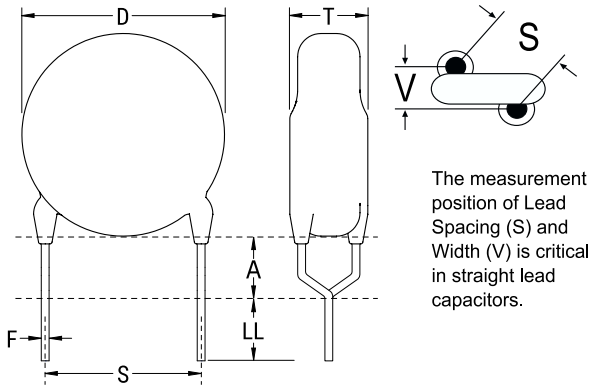

The measurement position of Lead Spacing (S) and Width (V) is critical in straight lead capacitors.

General Information	
Series:	ERK610 SFTY X1-440 Y2-300
Style:	Radial Disc
Description:	Ceramic Single Layer Safety Disc Capacitors
RoHS:	Yes
Termination:	Tin
Qualifications:	UL, CSA, CAN, ENEC, VDE
Notes:	Please See Bulletin For Taping Information. H0 Dimension Refers to Seating Plane To Center Hole of Tape

Dimensions	
D	8mm MAX
T	6mm MAX
S	7.5mm +0.8/-0.2mm
H0	16mm +/-0.5mm
F	0.6mm +/-0.05mm
A	4.5mm MAX
V	1.9mm +/-0.5mm

Specifications	
Capacitance:	100 pF
Capacitance Tolerance:	10%
Voltage AC:	440 VAC (X1), 300 VAC (Y2)
Temperature Range:	-40/+125°C
Temperature Coefficient:	Y5S
Dissipation Factor:	2.50%
Insulation Resistance:	6 GOhms
Safety Class:	X1/Y2

Packaging Specifications	
Packaging:	T&R, H0 = 16mm, Component Pitch = 12.7mm

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)