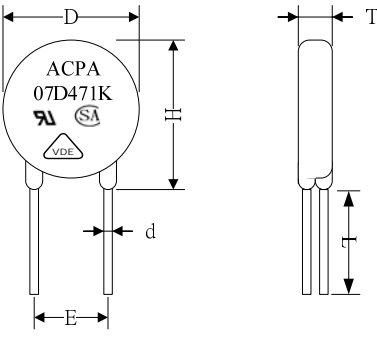
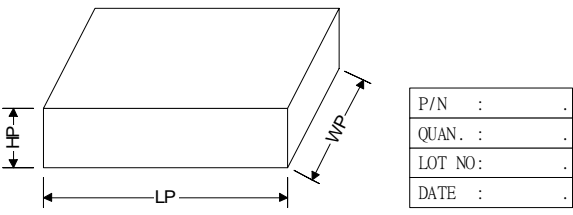



CLASSIFICATION	SPECIFICATION		PAGE	1 / 4													
SUBJECT	ACPA SURGE ABSORBER		DATE	2014-7-1													
PART NUMBER	ACPA07D471KS3.3NL																
1	Dimension																
1.1	Appearance	No visible scarp. Clear marking.															
1.2	Disk Dimension		<table border="1"> <tr> <td>D</td> <td>9 max.</td> </tr> <tr> <td>H</td> <td>11 max.</td> </tr> <tr> <td>T</td> <td>5.0 max.</td> </tr> <tr> <td>d</td> <td>0.6 ± 0.1</td> </tr> <tr> <td>E</td> <td>5.0 ± 0.8</td> </tr> <tr> <td>L</td> <td>3.3 ± 0.5</td> </tr> </table>	D	9 max.	H	11 max.	T	5.0 max.	d	0.6 ± 0.1	E	5.0 ± 0.8	L	3.3 ± 0.5	unit : mm	
D	9 max.																
H	11 max.																
T	5.0 max.																
d	0.6 ± 0.1																
E	5.0 ± 0.8																
L	3.3 ± 0.5																
1.3	Marking	Trade Mark , Spec.,UL & CSA,VDE recognized															
2	Packing																
2.1	Quantity	4000 pcs															
2.2	Packing Dimension		<table border="1"> <tr> <td>LP</td> <td>250 max.</td> </tr> <tr> <td>HP</td> <td>60 max.</td> </tr> <tr> <td>WP</td> <td>170 max.</td> </tr> </table>	LP	250 max.	HP	60 max.	WP	170 max.	unit : mm							
LP	250 max.																
HP	60 max.																
WP	170 max.																
3	Material List																
3.1	Drawing																
3.2	Material Chart	RoHS	Item	Composition													
			Coating	Epoxy Resin													
			Lead	Cp/Cu. Wire													
			Electrode	Silver													
			Disk	Zinc Oxide													
			Solder	Sn:100%													

CLASSIFICATION		SPECIFICATION		PAGE	2 / 4								
SUBJECT		ACPA SURGE ABSORBER		DATE	2014-7-1								
4 Electrical Test Method													
4.1	Varistor Voltage	The voltage between two terminals with the specified measuring current 1 mA DC applied is call Vb.											
4.2	Maximum Allowable Voltage	The recommended maximum sine wave voltage (rms) or the maximum DC voltage can be applied continuously.											
4.3	Maximum Clamping Voltage	The maximum voltage between two terminal with the specification standard impulse current (8/20 µsec).											
4.4	Rated Wattage	The maximum power that can be applied within the specified ambient temperature.											
4.5	Energy	The maximum energy within the varistor voltage change of ±10% when one impulse of 2msec. is applied.											
4.6	Withstanding Surge Current	The maximum current within the varistor voltage change of ±10% with the standard impulse current (8/20 µsec) applied one time.											
4.7	Varistor Voltage Temp. Coefficient	$\frac{V_b \text{ at } 20^{\circ}\text{C}(68^{\circ}\text{F}) - V_b \text{ at } 70^{\circ}\text{C}(158^{\circ}\text{F})}{V_b \text{ at } 20^{\circ}\text{C}(68^{\circ}\text{F})} \times \frac{1}{50} \times 100 (\%/^{\circ}\text{C})$											
4.8	Surge Life	The change of Vb shall be measured after the impulse listed below is applied 10,000 times continuously with the interval of ten seconds at room temperature.											
		5 series	180L to 680K	0.5A (2 msec)									
			820K to 471K	20A(8/20µsec)									
		7 series	180L to 680K	1.5A (2 msec)									
			820K to 471K	50A(8/20µsec)									
		10 series	180L to 680K	50A(8/20µsec)									
			820K to 821K	100A(8/20µsec)									
		14 series	180L to 680K	75A(8/20µsec)									
			820K to 821K	150A(8/20µsec)									
		20 series	180L to 680K	100A(8/20µsec)									
820K to 821K	200A(8/20µsec)												
5 Mechanical Test Method													
5.1	Terminal Pull Strength	After gradually applying the load specified below and keeping the unit fixed for ten seconds , the terminal shall be visually examined for any damage. <table style="width: 100%; margin-top: 10px;"> <thead> <tr> <th style="text-align: center;"><u>Terminal diameter</u></th> <th style="text-align: center;"><u>Load</u></th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">0.6mm (.024")</td> <td style="text-align: center;">0.5kg (1.1 lbs)</td> </tr> <tr> <td style="text-align: center;">0.8mm (.031")</td> <td style="text-align: center;">1.0kg (2.2 lbs)</td> </tr> <tr> <td style="text-align: center;">1.0mm (.039")</td> <td style="text-align: center;">2.0kg (4.4 lbs)</td> </tr> </tbody> </table>				<u>Terminal diameter</u>	<u>Load</u>	0.6mm (.024")	0.5kg (1.1 lbs)	0.8mm (.031")	1.0kg (2.2 lbs)	1.0mm (.039")	2.0kg (4.4 lbs)
<u>Terminal diameter</u>	<u>Load</u>												
0.6mm (.024")	0.5kg (1.1 lbs)												
0.8mm (.031")	1.0kg (2.2 lbs)												
1.0mm (.039")	2.0kg (4.4 lbs)												
5.2	Terminal Bending Strength	The unit shall be secured with its terminal kept vertical and the weight specified below be applied in the axial direction. The terminal shall gradually be bent by 90°in one direction , then 90°in the opposite direction , and again back to the original position. The damage of the terminal shall be visually examined. <table style="width: 100%; margin-top: 10px;"> <thead> <tr> <th style="text-align: center;"><u>Terminal diameter</u></th> <th style="text-align: center;"><u>Load</u></th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">0.6mm (.024")</td> <td style="text-align: center;">0.5kg (1.1 lbs)</td> </tr> <tr> <td style="text-align: center;">0.8mm (.031")</td> <td style="text-align: center;">1.0kg (2.2 lbs)</td> </tr> <tr> <td style="text-align: center;">1.0mm (.039")</td> <td style="text-align: center;">2.0kg (4.4 lbs)</td> </tr> </tbody> </table>				<u>Terminal diameter</u>	<u>Load</u>	0.6mm (.024")	0.5kg (1.1 lbs)	0.8mm (.031")	1.0kg (2.2 lbs)	1.0mm (.039")	2.0kg (4.4 lbs)
<u>Terminal diameter</u>	<u>Load</u>												
0.6mm (.024")	0.5kg (1.1 lbs)												
0.8mm (.031")	1.0kg (2.2 lbs)												
1.0mm (.039")	2.0kg (4.4 lbs)												

CLASSIFICATION		SPECIFICATION	PAGE	3 / 4
SUBJECT		ACPA SURGE ABSORBER	DATE	2014-5-30
5.3	Vibration	Subjected to simple harmonic motion of 0.75 mm (0.029") amplitude 1.5mm (0.058") maximum total excursion-between limits of 10 ~ 55 Hz. frequency scan shall then be applied for period of two hours in each of three mutually perpendicular direction , Thereafter , the unit shall be visually examined.		
5.4	Solderability	After dipping the terminal to a depth of approximately 3 mm (0.118") from the body in a soldering bath of 260°C (500°F) for two seconds , the terminal shall be visually examined.		
5.5	Resistance to Soldering Heat	The terminal shall be dipped into a soldering bath having a temperature of 350°C (660 °F) to a point 3 mm (0.118") from the body of the unit and then be held there for three seconds. The change of Vb and mechanical damage shall be examined.		
6 Environmental Test Method				
6.1	High Temperature Storage	The specimen shall be subjected to 125°C (257°F) for 1000 hours in a thermostatic bath without load and then stored at room temperature and humidity for one to two hours. Thereafter , The change of Vb Shall be measured.		
6.2	Humidity	The specimen shall be subjected to 40°C (104°F) , 90 to 95 % R.H. for 1000 hours without load and then stored at room temperature and humidity for one to two hours. Thereafter , the change of Vb shall be measured.		
6.3	Thermal Shock	The temperature cycle shown below shall be repeated five times and then stored at room temperature and humidity for one to two hours. The change of Vb as well as mechanical damage shall be examined.		
		Step	Temperature	Period
		1	-40°C (-40°F)	30 min.
		2	85°C (185°F)	30 min.
6.4	High Temperature Operation	After being continuously applied the Maximum Allowable Voltage at 85°C (185°F) for 1000 hours , the specimen shall be stored at room temperature and humidity for one to two hours. Thereafter , the change of Vb shall be measured.		
6.5	Humidity Operation	The specimen shall be subjected to 40°C (104°F) ,90 to 95%RH and the Maximum Allowable Voltage for 1000 hours and then stored at room temperature and humidity for one to two hours. Thereafter, the change of Vb shall be measured.		
6.6	Low Temperature Storage	The specimen shall be subjected to -40°C (-40°F) without load for 1000 hours and then stored at room temperature for one to two hours. Thereafter, the change of Vb shall be measured.		

CLASSIFICATION		SPECIFICATION		PAGE	4 / 4	
SUBJECT		ACPA SURGE ABSORBER		DATE	2014-7-1	
7 Electrical Test Requirements						
7.1	Varistor voltage	Vb : 423 V~ 517 V		Measuring current : 1 mA DC		
7.2	Maximum Allowable Voltage	AC : 300 V rms DC : 385 V				
7.3	Clamping Voltage	775 V max.		Measuring current : 10 A Impulse waveform : 8/20 μsec		
7.4	Rated Wattage	0.25 W				
7.5	Energy	30 J		Impulse waveform : 8/20μsec		
7.6	Withstanding Surge Current	1 Pulse	1200 A	Impulse waveform : 8/20 μsec 8/20 μsec , interval 5 min.		
		2 Pulse	600 A			
7.7	Varistor Voltage Temp. Coefficient	0 to 0.05% / °C		Temp. range : +25°C ~ +85°C		
7.8	Surge Life	$\Delta V_b / V_b \leq 10\%$ at 50 A		Impulse waveform : 8/20 μsec 10000 times by interval 10 sec		
7.9	Capacitance	105 pF (reference)		Measure frequency : 1 KHz		
8 Mechanical Test Requirement						
8.1	Terminal Pull Strength	No outstanding damage		Load : 0.5 kg(1.1 lbs)		
8.2	Terminal Bending Strength	No outstanding damage		Load : 0.5 kg(1.1 lbs)		
8.3	Vibration	No outstanding damage		Frequency : 10 ~55 Hz Amplitude : 0.75 mm		
8.4	Solderability	Almost all the surface should be covered with solder uniformly		Solder Temp. : 260°C ± 2°C Immersed time : 3 sec		
8.5	Resistance to soldering heat	$\Delta V_b / V_b \leq \pm 5\%$ No outstanding damage		Solder Temp. : 350°C ± 2°C Immersed time : 3 sec		
9 Environmental Test Requirements						
9.1	High Temperature Storage	$\Delta V_b / V_b \leq \pm 5\%$		Ambient temp. : 125°C ± 2°C Time : 1000 hours		
9.2	Humidity	$\Delta V_b / V_b \leq \pm 5\%$		Ambient temp. : 40°C ± 2°C Humidity : 90 to 95 % R.H. Time : 1000 hours		
9.3	Thermal Shock	$\Delta V_b / V_b \leq \pm 5\%$		Step	Temp.	Period
				1	-40 °C	30 min.
				2	85 °C	30 min.
				5 Cycles		
9.4	High Temperature Operation	$\Delta V_b / V_b \leq \pm 10\%$		Ambient temp. : 85°C ± 2°C Time : 1000 hours		
9.5	Humidity Operation	$\Delta V_b / V_b \leq \pm 10\%$		Ambient temp. : 40°C ± 2°C Humidity : 90 to 95 % R.H. Time : 1000 hours		
9.6	Low Temperature Storage	$\Delta V_b / V_b \leq \pm 5\%$		Ambient temp. : -40°C ± 2°C Time : 1000 hours		

单击下面可查看定价，库存，交付和生命周期等信息

[>>ACPA\(华格科技\)](#)