


REVISONS					
REV/	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

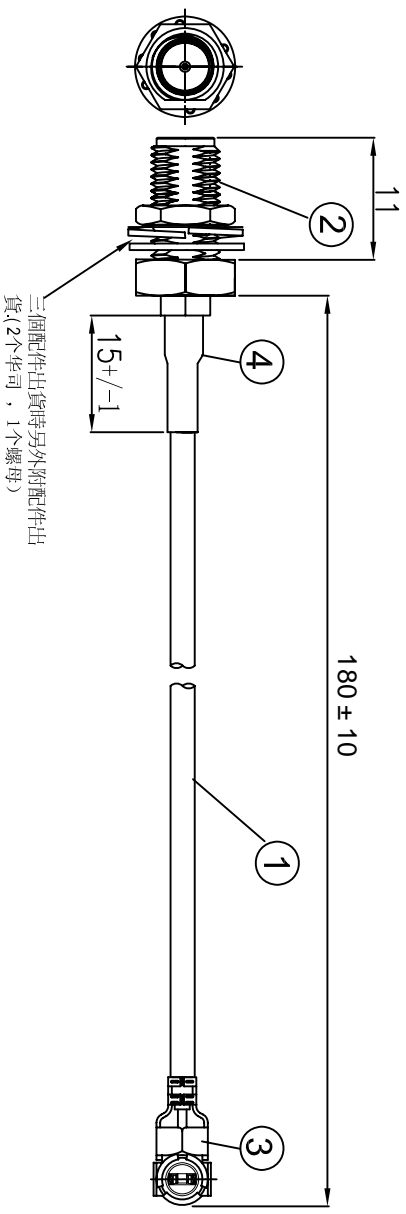

- NOTES:
- ELECTRICAL:
    - VOLTAGE RATING:DCV 300V 10MS
    - CONDUCTANCE RESISTANCE:3.0 OHM/MAX.
    - INSULATION RESISTANCE: 5.0M OHM/MIN.
    - THE CABLE SHOULD BE 100% ELECTRICAL TEST
    - IT SHOULD BE NO ANY OPENS/SHORT, MISWIRING AND INTERMITTENT FAILURES
  - MATERIAL:
    - SEE TABLE
  - MECHANICAL:
    - SMA PULL FORCE: 12.0KGS.
  - ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿I-PEX, 1.13端子, 镀金	1
②	接头	SMA母头内孔, 分体, 13牙, 镀金	1
①	同轴线	RF 1.13灰色线,OD:1.13mm	AS

# 金航标电子有限公司

ALL DIMENSION ARE IN MM		DRAWN	DATE	TITLE	
COMPUTER GENERATED IN SOLIDWORKS		Jenny	2018/05/04	RF CABLE	
DO NOT SCALE THIS DRAWING		ENG.		I-PEX 1.13 TO SMA / F L=180MM	
PROJECTION		MFG.		SIZE	Number
GENERAL TOLERANCE FOR ANGLES ± 1° ± 0.3 ± 0.25 ± 0.150		Q.A.		B	REV
SCALE: Free		TYPE		SHEET 1 OF 1	

CUSTOMER PIN:

单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)