
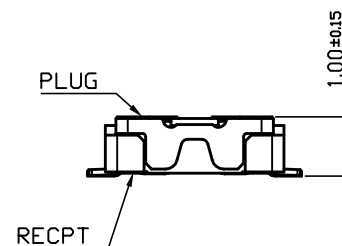



NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0(LCP); COLOR:BLACK.
 - 1.2 CONTACT: PHOSPHOR BRONZE(C5210)
 - 1.3 FITTING NAIL: PHOSPHOR BRONZE(C5191)
2. FINISH:
 - CONTACT:SEE ORDER INFORMATION.
 - UNDERPLATING: 50~100μ" NICKEL OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
4. SPEC. PLS. REFER TO PS-51023-xxxxx
5. PACKAGE PLS. REFER TO 51024-XXXCR-XX
6. MATING CONNECTOR P/N:51023
7. PART NUMBER

51024-XXX		X	X-001
CKTS	PACKING		001:NORMAL
0.TAPE REEL			BS1:PLASTIC REEL
			CONTACT PLATING
			1.G/F ON CONTACT
			8.20μ" GOLD ON CONTACT AND SOLDER



MATING CONDITION

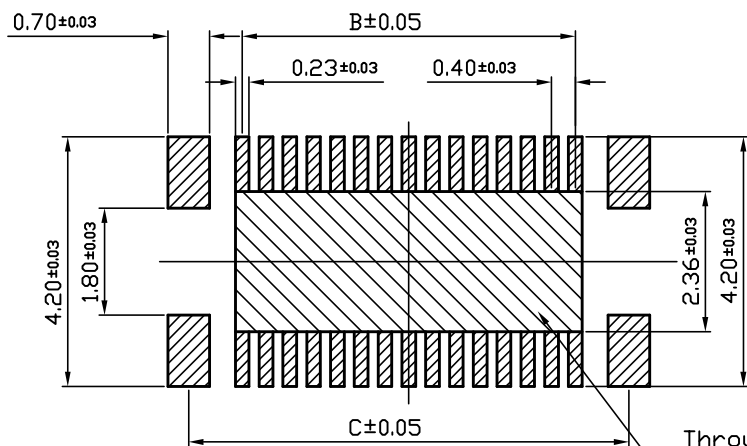

RECOMMENDED PCB PATTERN

Through hole without insulation is prohibited

DIM	A	B	C
20Pin	6.75	3.60	5.40
24Pin	7.55	4.40	6.20
30Pin	8.75	5.60	7.40
40Pin	10.75	7.60	9.40

QUALITY SYMBOLS	DRAWN BY	DATE	ACES ELECTRONICS		
MAJOR Ⓢ	TSO I CHIAO	18/02/22			
CRITICAL Ⓢ	CHECKED BY	DATE	TITLE		
GENERAL TOLERANCES (UNLESS SPECIFIED)	Chen, Chun Yuan	18/02/22			0.4mm 1.0H BOARD TO FPC CONN ,SOCKET
.X ±0.5	APPROVED BY	DATE			
.XX ±0.25	Wang, chun sheng	18/02/22	UNITS	SIZE	DWG NO.
.XXX ±0.1			mm	A4	51024-XXXXX-XXX
ANGLES ±2°			SCALE	SHEET NO.	REV
			8:1	1 OF 1	E
					PART NO.
					SEE NOTES

单击下面可查看定价，库存，交付和生命周期等信息

[>>ACES\(宏致\)](#)