

DFE201610E-1R0M# "#" indicates a package specification code.



< List of part numbers with package codes > DFE201610E-1R0M=P2

Shape

, 0.5±0.3 , 2.0±0.2 , 2.0±0.2 , 1.6±0.2 , (in mm.	
L size	2.0 ±0.2mm
Wsize	1.6 ±0.2mm
T size	1.0 mm
Size code in inch (mm)	0806 (2016)

Notes

Rated current (lsat) is specified when the decrease of the initial inductance value at 30%. (The ambient reference temperature is 20°C.) Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 20°C.)

References

Packaging code	Specifications	Minimum quantity
=P2	φ180mm Embossed taping	3000

Mass	(Тур.)
1 piece	0.0151g

Specifications

Inductance	1.0μH ±20%
Inductance test frequency	1MHz
Rated current (Isat) (Based on Inductance change)	3600mA
Rated current (Itemp) (Based on Temperature rise)	2700mA
Max. of DC resistance	0.057Ω
Operating temperature range (Self-temperature rise is included)	-40~125°C
Class of magnetic shield	Metal Alloy
Absolute maximum voltage	20V DC
Series	DFE201610E

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.


2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



1 of 2

Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

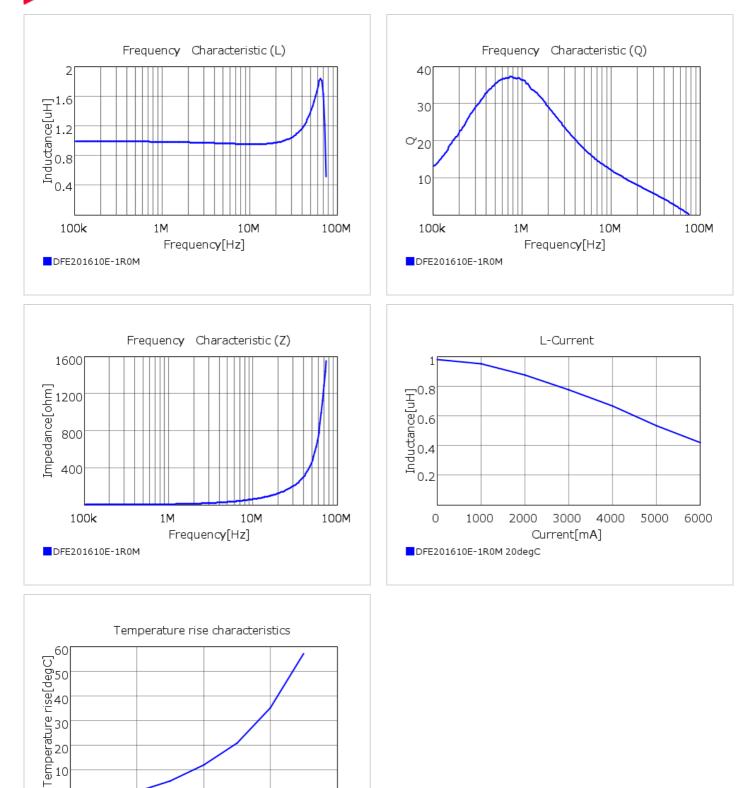

DFE201610E-1R0M

1000

2 of 2

🔔 Attention

0

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

4000

2. This datasheet has only typical specifications because there is no space for detailed specifications.

2000

Current[mA]

3000

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

单击下面可查看定价,库存,交付和生命周期等信息

>>Murata(村田)

>>点击查看相关商品